


1/4" INPUT JACK

1/4" THRU PUT JACK

-20dB PAD TOGGLE SWITCH

COMPONENT END PANEL

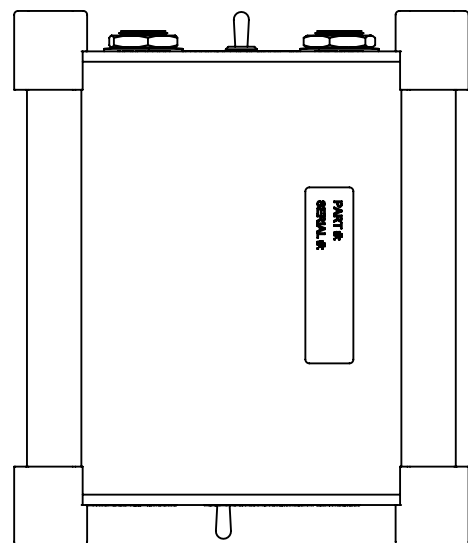

SC800A ACTIVE INSTRUMENT DIRECT BOX

Switchcraft's SC800A Active Instrument Direct Box converts the unbalanced outputs of musical Instruments to balanced, mic level signals that can be connected to audio consoles and mic preamps. This product contains an amplifier circuit and requires a 48V Phantom power supply for operation. When phantom power is applied, the 48V phantom power LED will illuminate indicating the unit is powered on.

Additional feautures include a 20dB input pad and a ground lift switch for eliminating grounding issues common with unbalanced equipment.

CONTROLS:


INPUT: 1/4" Mono (TS)

THRUPUT: 1/4" Mono (TS)

OUTPUT: 3- Pin XLR

PAD: 20dB Input Pad

GROUND LIFT: XLR Pin 1 Lift

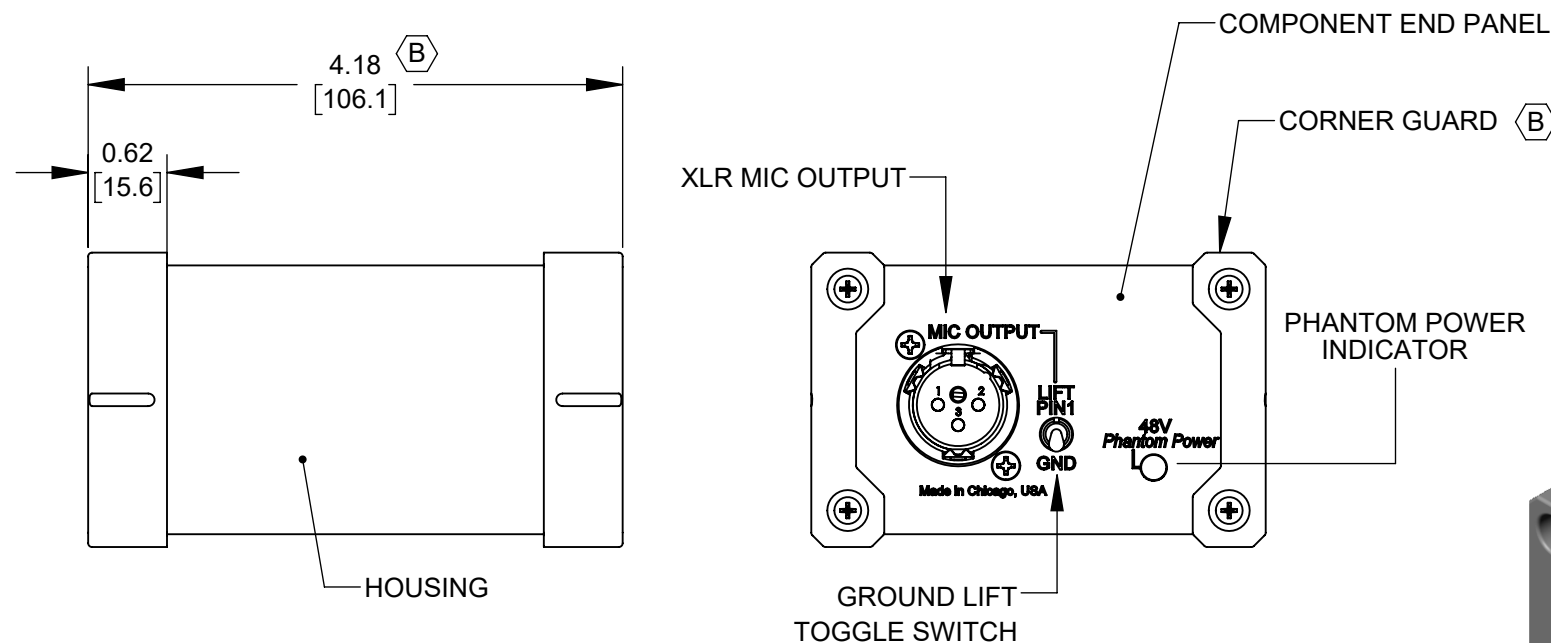

NOTES:

1. THE XLR CONNECTOR IS WIRED PIN-1 GROUND, PIN-2 HOT AND PIN-3 COLD.
2. MATERIALS:
HOUSING AND COMPONENT END PANELS - BLACK ANODIZED ALUMINUM
CORNER GUARDS - PVC, SATIN BLUE
3. LASER ETCHED ARTWORK WITH WHITE TEXT.
4. THIS PRODUCT IS RoHS COMPLIANT.



CUSTOMER DRAWING

					<div>UNLESS OTHERWISE SPECIFIED</div> <div>1. ALL DIMENSIONS IN INCHES [mm]</div> <div>- TWO PLACE DECIMALS ±0.02 [0.5]</div> <div>- THREE PLACE DECIMALS ±0.005 [0.13]</div>	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.										
						SIZE	WIDTH		MULT		LBS/M		TEMPER			
						FINISH SPEC No.						MATERIAL SPEC No.				
						FIRST USED ON				SCALE 2:3		Switchcraft®				
B	28564	2/13/22	TJK	TJK		DATE DRAWN 12/13/13	BY AM	CHKD PC 03/14/17	APVD TJK 03/14/17							
A	27705	05/19/16	PC	TJK								SHEET 1 OF 3				
REV	ECO NUMBER	DATE	BY	APVD		NAME ACTIVE INSTRUMENT DIRECT BOX, RoHS						PART No. SC800A				REV B
REVISIONS						DO NOT SCALE DRAWING										

SC800A Active Instrument Direct Box
Audio Specifications


Switchcraft®

Parameter	Performance	Conditions
Frequency Response	30Hz - 30kHz	+/-0.3dB, ref 1kHz
Total Harmonic Distortion + Noise	< 0.008% <0.04%	at 1kHz, +4dBu Input, 22kHz Bandwidth at 20Hz, +4dBu Input, 22kHz Bandwidth
Maximum Input Level	+12dBu +32dBu	at 20Hz with 1% THD+Noise With 20dB Pad Engaged
Input Impedance	> 1MΩ	at 1kHz
Output Impedance	< 600Ω	at 1kHz
Common Mode Rejection Ratio (CMRR)	>86dB >65dB	at 60Hz, Input at 60Hz, Output
Deviation from Linear Phase	< 16° < 1° < -12°	at 20Hz at 1Khz at 20kHz
Voltage Gain	+3dB -17dB	+/-1dB +/-1dB with 20dB pad engaged
Pad Attenuation	20dB	+/-1dB

Notes: All measurements were taken with a 25Ω unbalanced source and measured from the XLR with a 1kΩ balanced load.

CUSTOMER DRAWING

SCALE 1:2	Switchcraft®	
DATE DRAWN 12/13/13		
	SHEET 2 OF 3	
DRAWN BY AM	PART No. SC800A	REV B

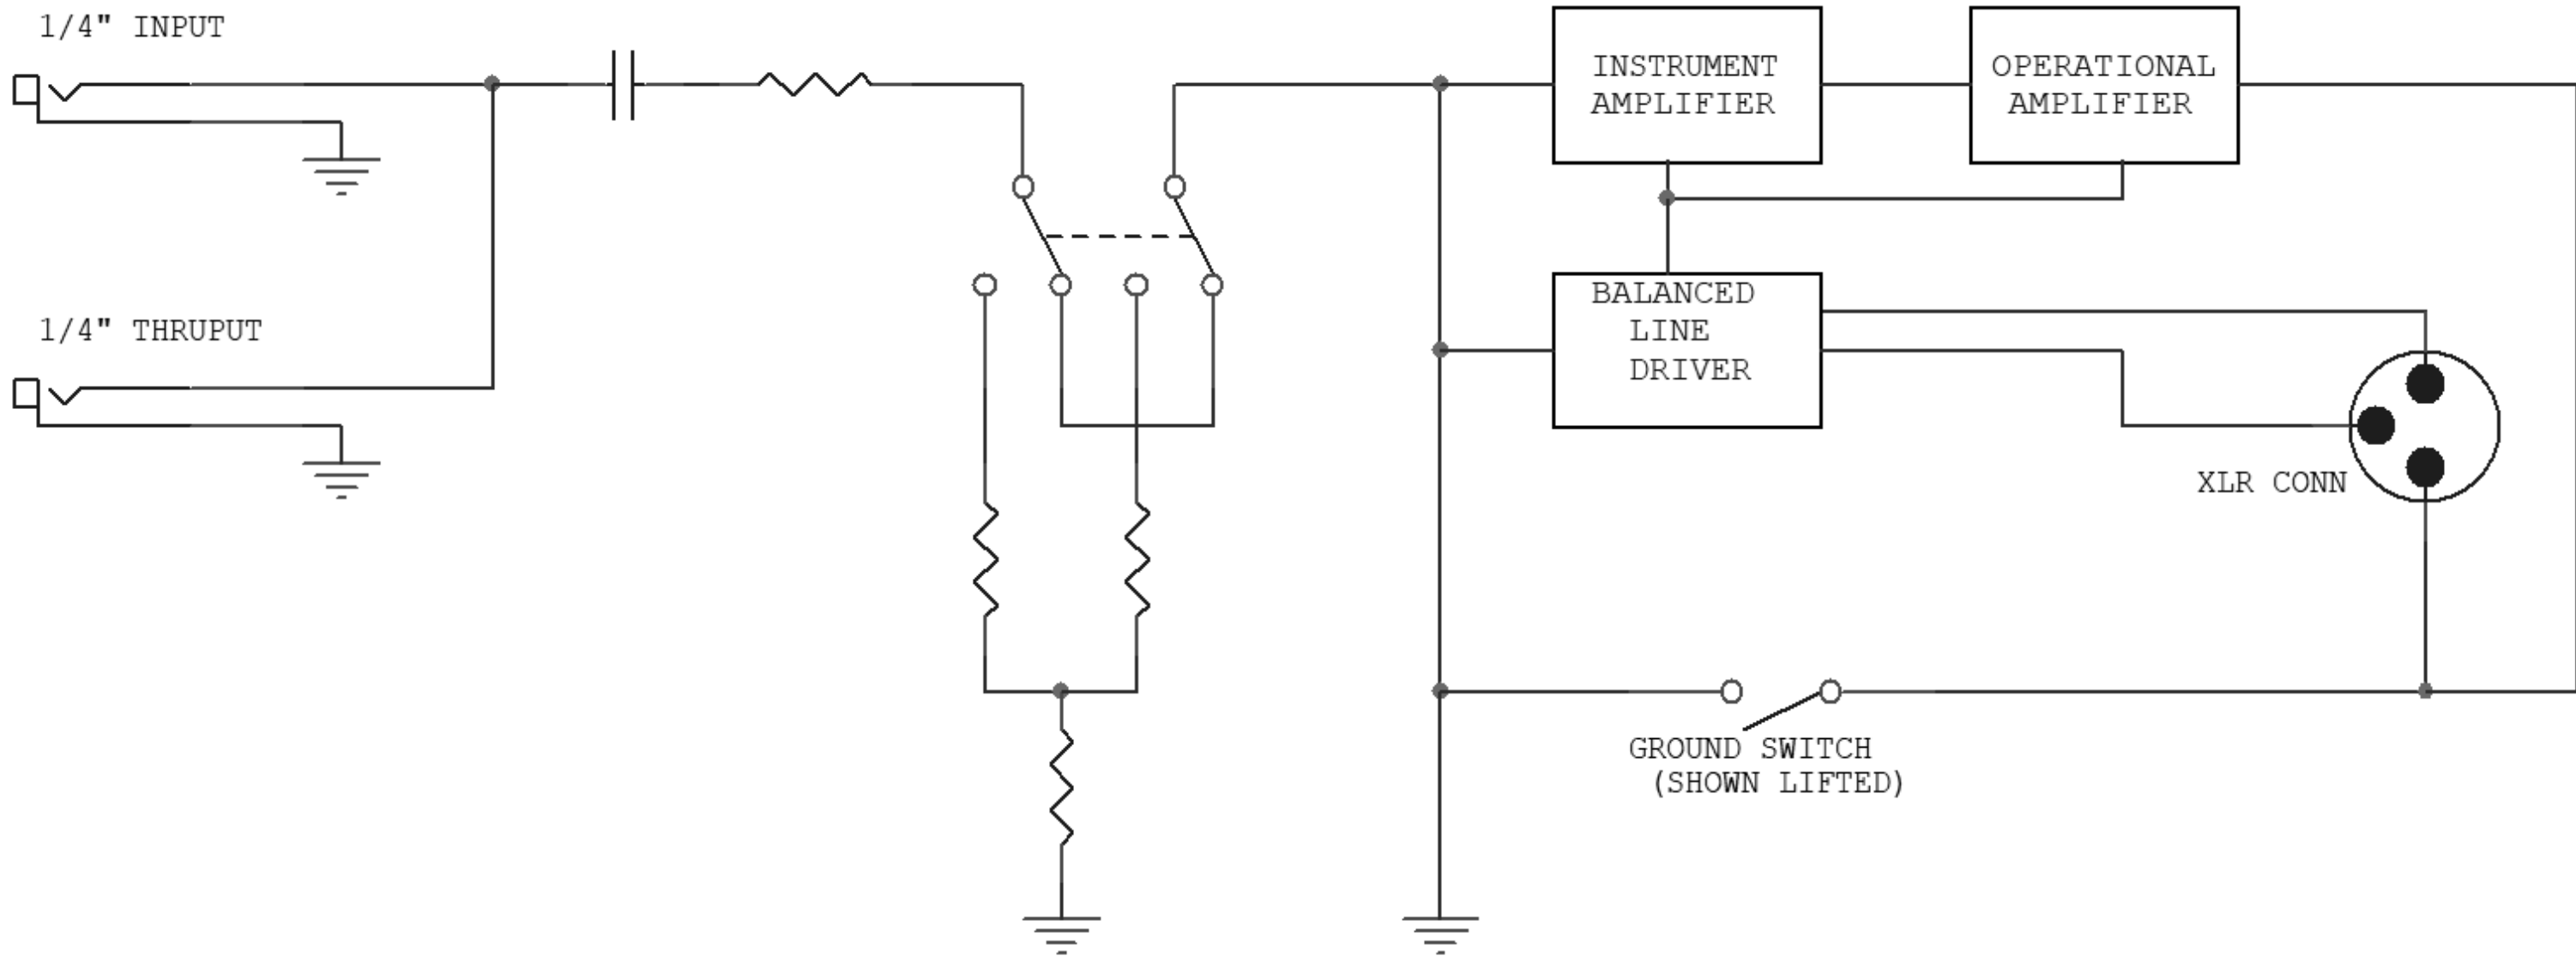

CUSTOMER DRAWING

SCALE 1:2	Switchcraft®		
DATE DRAWN 12/13/13			
DRAWN BY AM	PART No. SC800A	SHEET 3 OF 3	REV B