
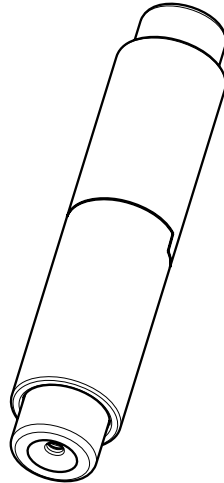
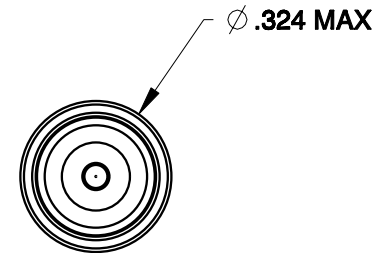


| REV | ECN | APP'D |
|-----|------|-------------|
| - | 4679 | JT 12/20/01 |
| A | 5793 | |

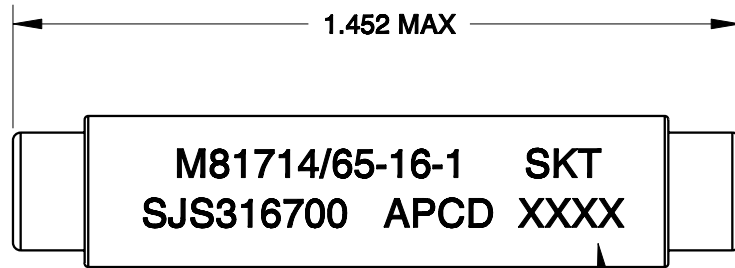

SCALE 2:1

NOTES:

- MATERIALS:**
INSULATOR BODY: POLYETHERIMIDE PER ASTM-D-5205
WIRE-SEALING GROMMET: SILICONE RUBBER PER A-A-59588
- PART ACCEPTS M39029/22-193 SOCKET CONTACTS - PER TABLE.
- OPERATING RANGE:**
TEMPERATURE: -65° C TO 200° C
INSULATION RESISTANCE: 5000 MEGOHMS MIN
DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, SEA LEVEL
200 VRMS, 100,000 FT ALTITUDE

CURRENT RATING: 13 AMPS
VIBRATION AND SHOCK: PER MIL-T-81714, PARA. 3.5.5 AND 3.5.8.

| PART NO. | DESCRIPTION | P/N MARKING |
|-----------|-------------------------------|-------------|
| SJS316600 | CONTACTS NOT SUPPLIED | SJS316700 |
| SJS316700 | QTY 2, M39029/22-193 INCLUDED | |

| | | | | | | | |
|---|---|-----------------------|--|------------------|---|-----------------------------|--------------|
| DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE | TOLERANCES .XX ±0.01 .XXX ±0.005 ANGLES ±1.0° | PROJECTION | <h1>Amphenol Pcd</h1> <p>SPECIFICATION DRAWING</p> | | TITLE SJS WIRE SPLICE SINGLE, SIZE 16 | | |
| | | | ENGR S. HORNER 12/17/01 | SIZE A | | DWG NO. SJS316700 | |
| THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., PEABODY, MA | | | CHKD | CODE: 58982 | | SCALE: 8:3 | SHEET 1 OF 1 |
| | | | APPD | | | | |