



Phone: (800) 694-8089
 www.lodestonepacific.com
 E-mail: sales@lodestonepacific.com


STM281-8

Material: DAP4 (Black)
UL Rating: UL94-VO, Class F
8 Terminals: Phosphorus Bronze
 .020 (.5mm) x .010 (.25mm), 100% Tin Plate.
Solderability: MIL-STD-202
 Method 208

Package Tray (HIPS): TY45x70-B (150/Tray)
 See RoHS compliant PVC packaging trays options on page 57.

Application: For surface mounting of components and wound toroids up to .280 inches in diameter. Encapsulation cover PC280 is available on page 16.

STM280-8 with Alloy 42 terminals instead of Phos Bronze is still available.

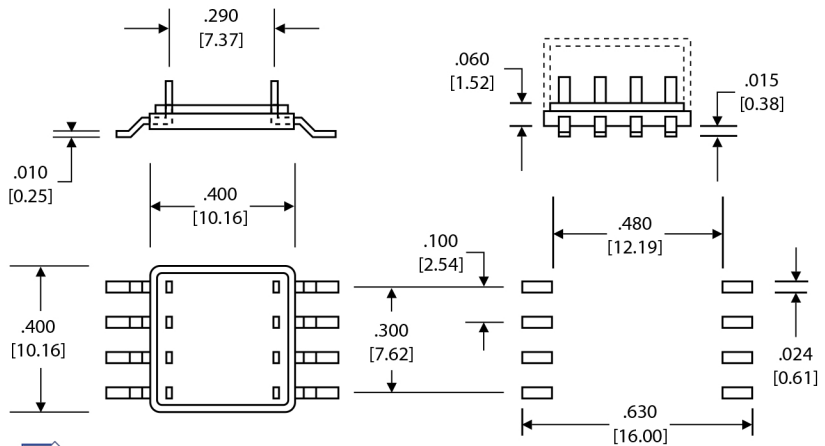

+/- .010 Inches
(mm), 2 x Size

[Request a Sample](#)

[View Inventory](#)

[Request a Quote](#)

[Toroid Mount Selector](#)

[REACH Database](#)

[Coil Winder Database](#)