



RECOMMENDED PADS LAYOUT
<TOP VIEW>

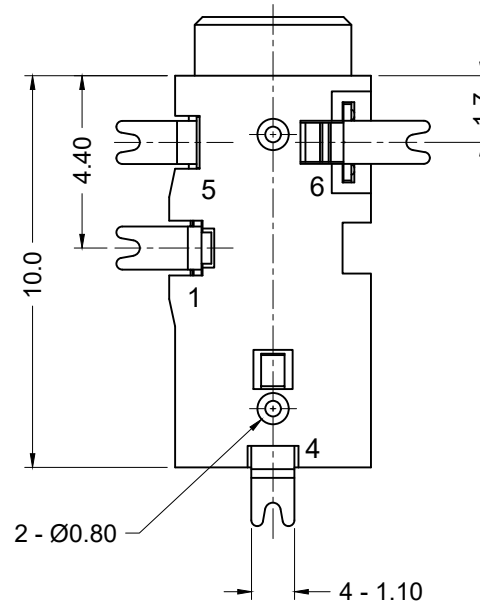

Material and Finish

Housing: High Temp Plastic
Terminals: Copper Alloy,
Silver Plated

Electrical Characteristics

Contact Resistance:
Before Test: 50 milliohms max.
After Durability Test:
100 milliohms max.
Rated Voltage: 16V DC
Rated Current: 0.3A
Insulation Resistance:
100 Megohms min.
at 500V DC
Dielectric Strength:
500V AC RMS for 1 minute
Operating Temp:
-25°C to +85°C

Tolerances

X.X ± 0.25
X.XX ± 0.15
Unless Stated
Otherwise



REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A0	1/11/08	New Drawing	WILL H.	H. MA	WILL H.	1/10/08
A1	2/7/08	Release Drawing	H. MA	N/A		
A2	09/14/09	ECO #09-070	S. Vien	H. MA	UNITS	mm
A3	08/14/18	Update Address	D. Shehan	N/A		
A4	12/15/21	Correct Dim Notes	C. Kelleher	Carl Furumasu		

STX-25406-4N-TR

Ø2.5mm Earphone Jack, SMT

4 Pins, RoHS Compliant

