

VRE D

Standard Series

ARTS Energy's VRE standard Ni-Cd series are perfectly suited to cycling applications. It is designed for a wide range of applications requiring a high level of robustness.

To meet customers' requirements, ARTS Energy provides custom-designed and standardized battery packs.

For your battery design and system needs, please contact ARTS Energy's engineers.

Applications

- Electric bicycles, scooters & wheelchairs
- Professional electronic devices
- Lighting equipment
- Military equipment

Main advantages

- Super high capacity
- Fast charge
- Good storage ability
- Excellent cycling performance

Technology

- Sintered positive electrode
- Plastic bonded negative electrode

Temperature range in discharge

- 20°C to + 60°C

Storage

Recommended: + 5°C to + 25°C

Relative humidity: 65 ± 5 %



Electrical characteristics			
Nominal voltage (V)	1.2		
Typical capacity (mAh)*	5100		
IEC minimum capacity (mAh)*	4500		
IEC designation	KRHR 33/62		
Impedance at 1000 Hz (mΩ)	<4		
* Charge 16 h at C/10, discharge at C/5.			
Dimensions			
Diameter (mm)	32.15 ± 0.10		
Height (mm)	58.2 ± 0.4		
Top projection (mm)	1.4 ± 0.4		
Top flat area diameter (mm)	5.6 ± 0.1		
Weight (g)	150		
Dimensions are given for bare cells.			
Charge conditions Rate	Time (h)	Temp. (°C)	Charge current (mA)
Fast*	~1	+ 10 to + 40	up to 4500
Standard	16	+5 to + 50	450
Trickle**			110 to 225
* End of charge cut-off is requested: -dV or dT°C/dt.		** Trickle charge follows fast charge.	
Maximum discharge current			
Continuous (A) at + 20°C	40		
Peak (A) at + 20°C*	150		
* Peak duration: 0.3 second - final discharge voltage 0.65 volt/cell.			




Advanced Rechargeable Technology and Solutions



Typical performances

For graphs shown, C is the IEC₅ capacity.

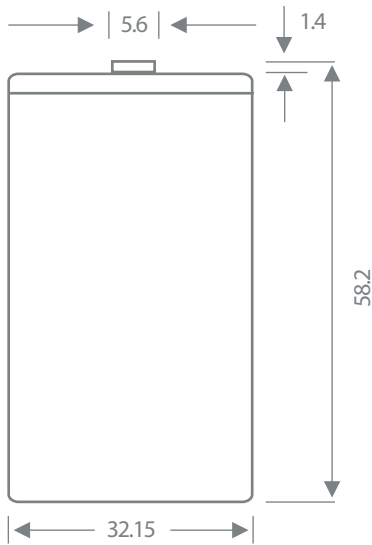


Dimensions are in mm.


Data are given for single cells. Please consult ARTS Energy for utilization of cell outside this specification.

Data in this document are subject to change without notice and become contractual only after written confirmation by ARTS Energy.


Voltage in normal charge (current 0.1 C)

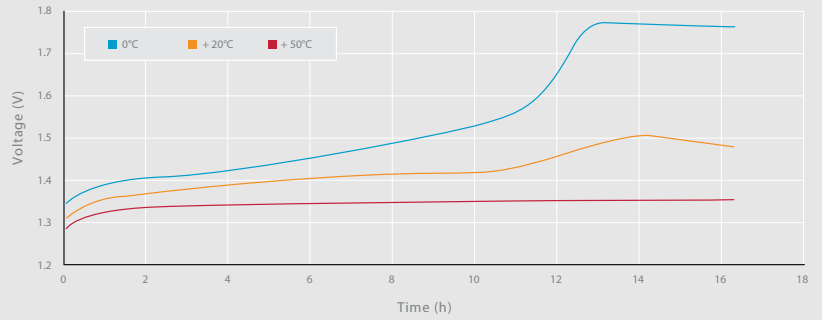


Voltage in fast charge (current 0.3 C)

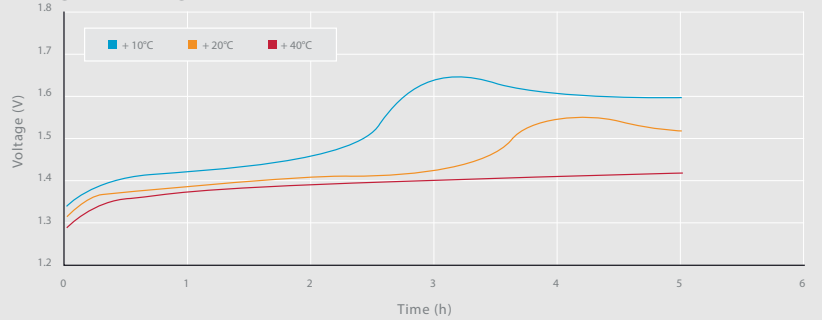

Discharge at different rates (after charge 0.1 C x 16 hours at +20°C)

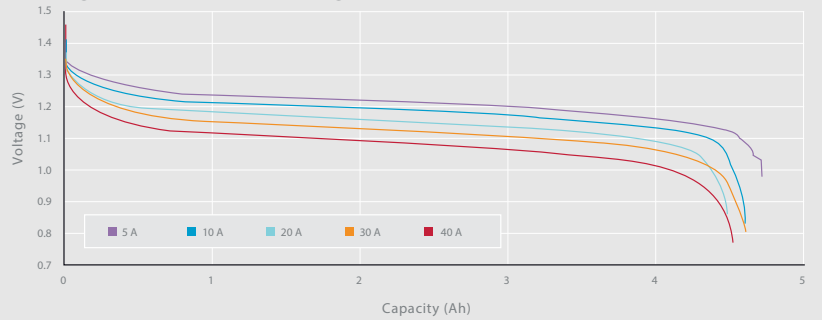

Charge retention (between +20°C and +60°C)

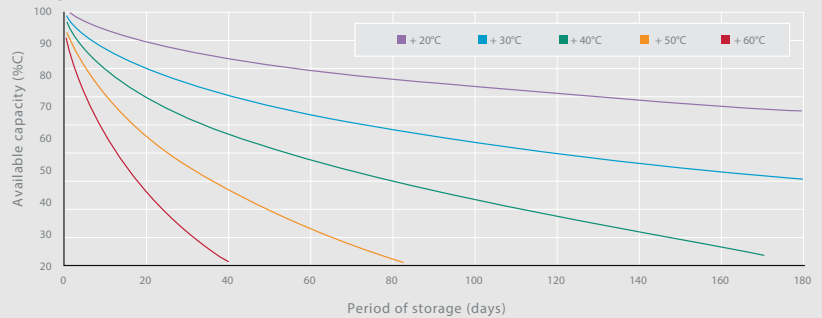

10, rue Ampère
Zone Industrielle
16440 Nersac, France
Tél. +33(0)5 45 90 35 50
www.arts-energy.com