


New Solar Warning Labels

Keeping you compliant

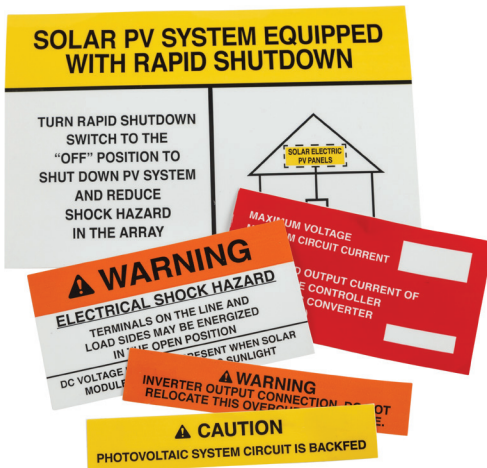

Make sure your newly installed solar panel system is compliant with NEC standards by identifying all electrical boxes, points of connection and other areas of potential hazard with new pre-printed solar warning labels. These labels provide the long-lasting, high-quality identification you've come to expect from Brady.

Need labels in a pinch? We've got you covered. Labels are available in packs of 25 with short lead times so you can get only what you need without the wait.

These labels provide you with:

- NEC-compliant language and colors
- Color and legend permanence for outdoor applications
- Overlaminated for better abrasion resistance with no added cost

Legend	Size (in.)	Quantity	Catalog #
WARNING ELECTRICAL SHOCK HAZARD TERMINALS ON THE LINE AND LOAD SIDES MAY BE ENERGIZED IN THE OPEN POSITION	3.75 x 2.00	25 pack	149868
WARNING ELECTRICAL SHOCK HAZARD THE DC CONDUCTORS OF THIS PHOTOVOLTAIC SYSTEM ARE UNGROUNDED AND MAY BE ENERGIZED	3.75 x 2.00	25 pack	149886
WARNING ELECTRICAL SHOCK HAZARD TERMINALS ON THE LINE AND LOAD SIDES MAY BE ENERGIZED IN THE OPEN POSITION DC VOLTAGE IS ALWAYS PRESENT WHEN SOLAR MODULES ARE EXPOSED TO SUNLIGHT	3.75 x 2.00	25 pack	149825
WARNING ELECTRICAL SHOCK HAZARD IF A GROUND FAULT IS INDICATED NORMALLY GROUNDED CONDUCTORS MAY BE UNGROUNDED AND ENERGIZED	3.75 x 2.00	25 pack	149859
WARNING TURN OFF PHOTOVOLTAIC AC DISCONNECT PRIOR TO WORKING INSIDE PANEL	3.75 x 2.00	25 pack	149891
WARNING THIS SERVICE METER IS ALSO SERVED BY A PHOTOVOLTAIC SYSTEM	3.75 x 2.00	25 pack	149882
WARNING THE DISCONNECTION OF THE GROUNDED CONDUCTOR(S) MAY RESULT IN OVERVOLTAGE ON THE EQUIPMENT	3.75 x 2.00	25 pack	149866
SOLAR SYSTEM BREAKER	3.75 x 2.00	25 pack	149880
PHOTOVOLTAIC SYSTEM DC DISCONNECT OPERATING CURRENT ____ OPERATING VOLTAGE ____ MAXIMUM SYSTEM VOLTAGE ____ SHORT CIRCUIT CURRENT ____	3.75 x 2.00	25 pack	149850
PHOTOVOLTAIC SYSTEM EQUIPPED WITH RAPID SHUTDOWN	3.75 x 2.00	25 pack	149873
MAXIMUM VOLTAGE ____ MAXIMUM CIRCUIT CURRENT ____ MAX RATED OUTPUT CURRENT OF THE CHARGE CONTROLLER OR DC-TO-DC CONVERTER (IF INSTALLED) ____	3.75 x 2.00	25 pack	149857

Legend	Size (in.)	Quantity	Catalog #
RATED AC OPERATING CURRENT ___ MAX RATED AC OPERATING CURRENT ___ RATED AC OPERATING VOLTAGE ___ MAX RATED AC OPERATING VOLTAGE ___ RATED SHORT CIRCUIT CURRENT ___ MAXIMUM SYSTEM VOLTAGE ___	3.75 x 2.00	25 pack	149832
RATED MAX POWER-POINT CURRENT ___ RATED MAX POWER-POINT VOLTAGE ___ MAXIMUM SYSTEM VOLTAGE ___ MAXIMUM CIRCUIT CURRENT ___ MAX RATED OUTPUT CURRENT OF THE CHARGE CONTROLLER IF INSTALLED ___	3.75 x 2.00	25 pack	149831
PHOTOVOLTAIC AC DISCONNECT MAXIMUM AC OPERATING CURRENT ___ NORMAL OPERATING VOLTAGE ___	4.00 x 1.00	25 pack	149869
WARNING DUAL POWER SOURCE SECOND SOURCE IS PHOTOVOLTAIC SYSTEM	4.00 x 1.00	25 pack	149887
WARNING INVERTER OUTPUT CONNECTION. DO NOT RELOCATE THIS OVERCURRENT DEVICE	4.00 x 1.00	25 pack	149844
WARNING SOLAR ELECTRIC BREAKER IS BACKFED	4.00 x 1.00	25 pack	149851
PHOTOVOLTAIC AC DISCONNECT	4.00 x 1.00	25 pack	149837
PHOTOVOLTAIC DC DISCONNECT	4.00 x 1.00	25 Pack	149861
DC JUNCTION BOX	4.00 x 1.00	25 pack	149862
PHOTOVOLTAIC SYSTEM kWh METER	4.00 x 1.00	25 pack	149879
DC COMBINER BOX	4.00 x 1.00	25 pack	149871
CAUTION PHOTOVOLTAIC SYSTEM CIRCUIT IS BACKFED	4.00 x 1.00	25 pack	149863
CAUTION: SOLAR CIRCUIT	6.50 x 1.00	25 pack	149867
DO NOT DISCONNECT UNDER LOAD	6.50 x 1.00	25 pack	149838
CAUTION: SOLAR ELECTRIC SYSTEM CONNECTED	6.50 x 1.00	25 Pack	149889
MAIN PHOTOVOLTAIC SYSTEM DISCONNECT	6.50 x 1.00	25 pack	149870
MAIN PHOTOVOLTAIC SYSTEM AC DISCONNECT	6.50 x 1.00	25 pack	149846
RAPID SHUTDOWN SWITCH FOR SOLAR PV SYSTEM	6.50 x 1.00	25 pack	149848
WARNING: PHOTOVOLTAIC POWER SOURCE	6.50 x 1.00	25 pack	149826
SOLAR PV SYSTEM EQUIPPED WITH RAPID SHUTDOWN TURN RAPID SHUTDOWN SWITCH TO THE 'OFF' POSITION TO SHUT DOWN CONDUCTORS OUTSIDE THE ARRAY. CONDUCTORS WITHIN ARRAY REMAIN ENERGIZED IN SUNLIGHT	6.50 x 4.00	25 pack	149864
SOLAR PV SYSTEM EQUIPPED WITH RAPID SHUTDOWN TURN RAPID SHUTDOWN SWITCH TO THE 'OFF' POSITION TO SHUT DOWN PV SYSTEM AND REDUCE SHOCK HAZARD IN THE ARRAY	6.50 x 4.00	25 pack	149830

 **Contact your local Brady representative to learn more**

USA
Customer Service: 1-888-272-3946
Inside Sales: 1-888-311-0775
BradyID.com

Canada
Customer Service: 1-800-263-6179
BradyCanada.ca

Mexico
Customer Service: 1-800-262-7777
Inside Sales: 1-800-262-7777 ext 177
BradyLatinAmerica.com

