

T.270 | Plugs

Duroplast

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- RH
-

BSP

RoHS

PF

+212 °F
-4 °F

MATERIAL

Phenolic based (PF) Duroplast, black colour, glossy finish.

PACKING RING


NBR synthetic rubber.

MAXIMUM CONTINUOUS WORKING TEMPERATURE

100°C.



| Conversion Table | |
|-------------------|------|
| 1 mm = 0.039 inch | |
| D | |
| mm | inch |
| 32 | 1.26 |
| 39 | 1.54 |
| 42 | 1.65 |
| 45 | 1.77 |
| 55 | 2.17 |
| 70 | 2.76 |

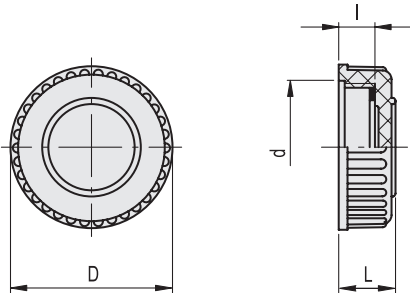

BSP

METRIC

| Code | Description | d | l | D | L | ⚖ |
|-------|-------------|--------|----|----|----|----|
| 58001 | T.270-1/2 | G 1/2 | 9 | 32 | 14 | 9 |
| 58011 | T.270-3/4 | G 3/4 | 10 | 39 | 15 | 15 |
| 58021 | T.270-1 | G 1 | 11 | 45 | 17 | 20 |
| 58031 | T.270-1¼ | G1 1/4 | 12 | 55 | 19 | 42 |

Accessories for hydraulic systems