


T495D226K035ZTA260

Obsolete

B45197A, Tantalum, MnO2 Tantalum, 22 uF, 10%, 35 VDC, SMD, Molded, Low ESR, Surge Robust, 260 mOhms, 7343, Height Max = 3.1mm

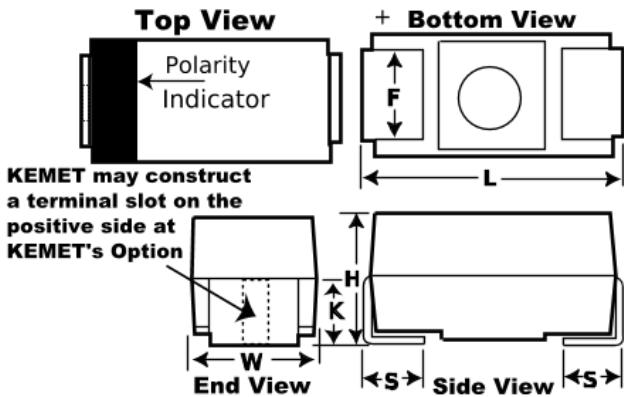

Dimensions

Footprint	7343
L	7.3mm +/-0.3mm
W	4.3mm +/-0.3mm
H	2.8mm +/-0.3mm
S	1.3mm +/-0.3mm
F	2.4mm +/-0.1mm
K	1.8mm TYP

Packaging Specifications

Packaging	T&R, 178mm
Packaging Quantity	750

General Information

Series	B45197A
Dielectric	MnO2 Tantalum
Style	SMD Chip
Description	SMD, Molded, Low ESR, Surge Robust
Features	Low ESR, Surge Robust, Automotive
RoHS	Yes
Termination	Tin
AEC-Q200	No
Notes	Obsolete.

Specifications

Capacitance	22 uF
Capacitance Tolerance	10%
Voltage DC	35 VDC (85C), 23.45 VDC (125C)
Temperature Range	-55/+125°C
Rated Temperature	85°C
Dissipation Factor	6%
Failure Rate	N/A
Resistance	0.26 Ohms (100kHz)
Ripple Current	760 mAmps (25C), 684 mAmps (85C), 304 mAmps (125C)
Leakage Current	7.7 uA