

# Datasheet

#### Part No: TG.30.8111W

#### Features:

600-6000MHz Operational Wideband Cellular 5G/4G Typical 70%+ Efficiency and 3dBi+ Peak Gain Dipole Straight Terminal Antenna Straight SMA(M) Connector RoHS and REACH Compliant

www.taoglas.com



1.	Introduction	2
2.	Specification	3
3.	Antenna Characteristics	6
4.	Radiation Patterns	8
5.	Mechanical Drawing	42
6.	Packaging	43
·	Changelog	44

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.





# Introduction

1.





The Apex White Straight TG.30 Dipole LTE Antenna - is primarily designed for use with 5G/4G modules and devices that require the highest possible efficiency and peak gain to deliver best in class throughput on all major cellular (5G/4G/3G/2G) bands worldwide for access points, terminals and routers. The antenna is a ground plane independent antenna with a SMA (M) connector.

The Apex exhibits high efficiency across the wide band and is backward compatible with 2G and 3G cellular applications such as GSM, LTE, UMTS, WI-FI and even has GPS included for Assisted GPS and/or E911 applications. With very high efficiency on every cellular band globally it is an ideal solution for any device requiring high, reliable performance. It is also guaranteed to meet any type approval or carrier certification requirements from a RF standpoint. It is an omni-directional antenna and the radiation patterns display this and are stable across all bands.

Typical Applications Include: Gateways and Routers Smart Metering Payment Terminals

It has a quality robust UV resistant housing for use with wireless terminals. This patented antenna is also available in black; with swivel mechanism and right angled versions. It is also available with swivel mechanism, hinged and right angle connectors. The connector can be changed subject to NRE or MOQ. For further information please contact your regional Taoglas customer support team.



# Specification

2.

LTE Electrical									
Band	Frequency	Measurement	Efficiency (%)	Average Gain	Peak Gain	Impedance	Polarization	Radiation	VSWR
5GNR/4G	(MHz)	30X30cm Ground plane (Centre)		(dB) -2.45	(dBi) 1.98			Pattern	
Band 5,8,12,13,14,17,18,20	617-960	Free space	54.8	-2.62	3.00				
,26,27,28,29,71		30X30cm Ground plane (Edge)	53.5	-2.72	2.66				
		30X30cm Ground plane (Centre)	54.6	-2.63	5.94				
5GNR/4G Band 21,32,74,75,76	1427-1518	Free space	49.8	-3.02	4.81				
		30X30cm Ground plane (Edge)	65.3	-1.85	3.10				3 MAX
4G/3G		30X30cm Ground plane (Centre)	70.8	-1.50	3.18				
Band ,2,3,4,9,23,25,35,39,	1710-2200	Free space	78.3	-1.06	4.03				
66		30X30cm Ground plane (Edge)	67.8	-1.69	3.91	50 Ω Linea		r Omni	
	2300-2400	30X30cm Ground plane (Centre)	61.5	-2.11	3.75				
<b>4G/3G</b> Band 40		Free space	75.0	-1.25	4.01				
		30X30cm Ground plane (Edge)	67.0	-1.74	3.63				
	2400-2500	30X30cm Ground plane (Centre)	31.9	-4.96	2.49		Linear		
<b>Wi-Fi</b> 2400		Free space	63.1	-2.00	3.32				
		30X30cm Ground plane (Edge)	59.3	-2.27	3.42				
		30X30cm Ground plane (Centre)	38.3	-4.17	7.15				
<b>4G/3G</b> Band 7,38,41	2490-2690	Free space	61.4	-2.12	4.73				
		30X30cm Ground plane (Edge)	48.5	-3.15	4.67				
<b>5GNR/4G</b> Band 22,42,43,48,77,78	3300-3800	30X30cm Ground plane (Centre)	34.0	-4.69	5.17				
		Free space	42.4	-3.73	4.84				
		30X30cm Ground plane (Edge)	36.8	-4.34	4.20				
	<b>800</b> 5150-5925	30X30cm Ground plane (Centre)	41.2	-3.85	8.37				
.TE5200/ Wi-Fi 5800		Free space	61.8	-2.09	6.52				
		30X30cm Ground plane (Edge)	41.3	-3.84	4.34				




Mechanical				
Casing	UV Resistant PC/ABS			
Flammability Rating	UL-94			
Connector	SMA Male Straight			

Environmental				
Temperature Range	-40°C to 85°C			
Humidity	Non-condensing 65°C 95% RH			



		5G/40	6 Bands		
Band Number		5GNR / FR1 / LTE / LTE-	Advanced / WCDMA / HSP/	A / HSPA+ / TD-SCDM	A
	Uplink	Downlink	30X30cm Ground plane (Centre)	Free space	30X30cm Ground plane
B1	1920 to 1980	2110 to 2170	✓	✓	✓
B2	1850 to 1910	1930 to 1990	✓	✓	✓
B3	1710 to 1785	1805 to 1880	✓	✓	✓
B4	1710 to 1755	2110 to 2155	✓	✓	✓
B5	824 to 849	869 to 894	√	✓	✓
B7	2500 to 2570	2620 to 2690	✓	✓	√
B8	880 to 915	925 to 960	1	✓	<b>√</b>
B9*	1749.9 to 1784.9	1844.9 to 1879.9	✓	1	✓
B11	1427.9 to 1447.9	1475.9 to 1495.9	*	1	<b>√</b>
B12	699 to 716	729 to 746	1	1	<b>√</b>
B13	777 to 787	746 to 756	1	1	<b>√</b>
B14	788 to 798	758 to 768	√	1	
B17	704 to 716	734 to 746	1	1	√
B18	815 to 830	860 to 875	4	1	4
B19	830 to 845	875 to 890	1	1	4
B20	832 to 862	791 to 821	4	1	√
B21	1447.9 to 1462.9	1495.9 to 1510.9	4	1	
B22*	3410 to 3490	3510 to 3590	✓ ✓	√ √	✓ ✓
B23*	2000 to 2020	2180 to 2200	<b>↓</b>	* •	✓
B24 B25	1626.5 to 1660.5	1525 to 1559	<b>↓</b>	<b>↓</b>	
B25 B26	1850 to 1915	1930 to 1995	<b>√</b>	×	✓
B20 B27*	814 to 849 807 to 824	859 to 894 852 to 869	✓ ✓	· · ·	✓
B27*	703 to 748		✓ ×	<b>↓</b>	<b>√</b>
B29		758 to 803 o 728	✓	<b>√</b>	
B30	2305 to 2315	2350 to 2360	√	· ✓	<b>√</b>
B31	452.5 to 457.5	462.5 to 467.5	*	*	*
B32		o 1496	√	√	
B34		o 2025	✓	√	· · · · · · · · · · · · · · · · · · ·
B35		o 1910	1	1	1
B36		o 1990	1	1	1
B37		o 1930	✓	✓	✓
B38	2570 to 2620		✓	✓	✓
B39	1880 t	o 1920	✓	✓	✓
B40	2300 t	o 2400	✓	✓	✓
B41	2496 t	o 2690	✓	✓	✓
B42	3400 t	o 3600	✓	✓	✓
B43	3600 t	o 3800	√	✓	✓
B45	1447 t	o 1467	√	✓	✓
B46	5150 t	o 5925	✓	✓	✓
B47	5855 t	o 5925	✓	✓	$\checkmark$
B48		o 3700	√	✓	<b>√</b>
B49		o 3700	<b>√</b>	1	<b>√</b>
B50		0 1517	√	1	
B51	1427 t		*	*	√
B52		o 3400	× ✓	•	*
B53	2483.5		✓	V	<b>√</b>
B65	1920 to 2010	2110 to 2200	✓	*	√
B66 B68	1710 to 1780 698 to 728	2110 to 2200 753 to 783	✓	*	✓
B69	2570 t		✓ <b>→</b>		√
B70	1695 to 1710	1995 to 2020	✓	×	✓
B71	663 to 698	617 to 652	*	×	*
B72	451 to 456	461 to 466	*	*	*
B73	450 to 455	460 to 465	*	*	*
B74	1427 to 1470	1475 to 1518	✓	✓	√
B75		o 1517	✓	1	✓
B76	1432 to 1317 1427 to 1432		*	1	✓
B77	3300 to 4200		✓	1	✓
B78		o 3800	√	✓	√
B79		o 5000	✓	1	✓
B85	698 to 716	728 to 746	✓	1	✓
B87	410 to 415	420 to 425	*	*	*
B88	412 to 417	422 to 427	*	*	*
200	112 (0 117	122 (0 727			-



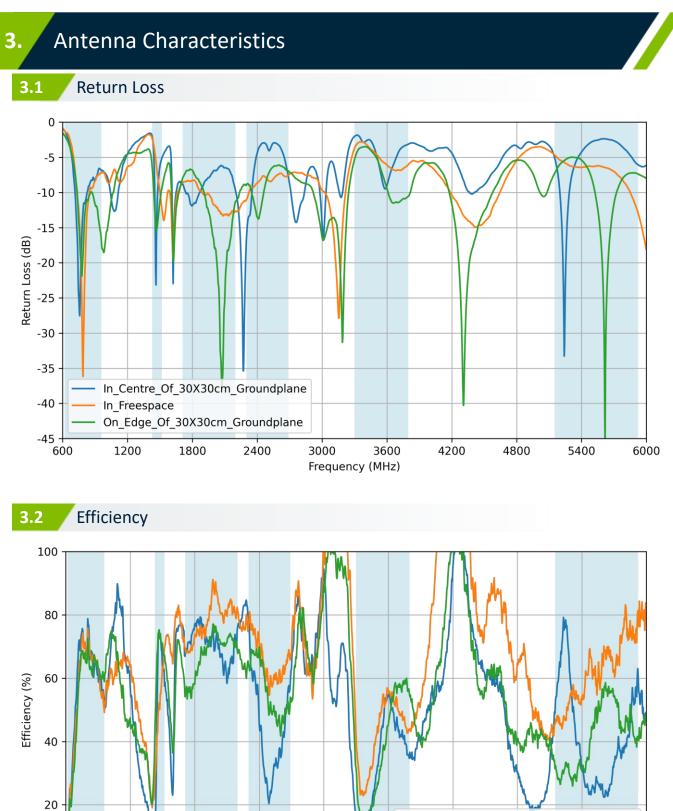

In\_Centre\_Of\_30X30cm\_Groundplane.

In\_Freespace.

On\_Edge\_Of\_30X30cm\_Groundplane.


In\_Freespace.


On\_Edge\_Of\_30X30cm\_Groundplane.

Im\_Freespace.

Im\_Freespace.</td



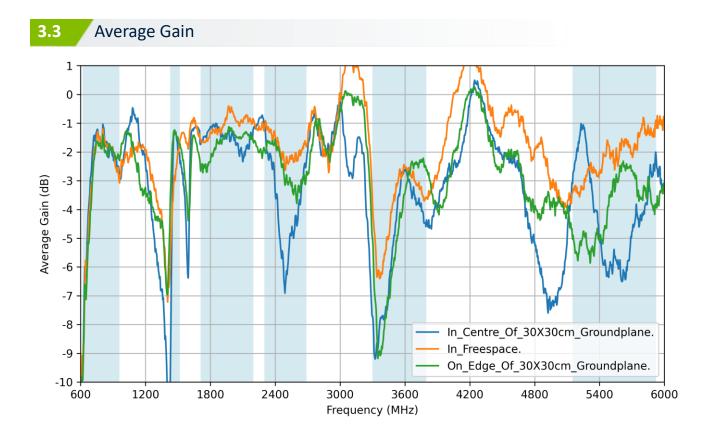

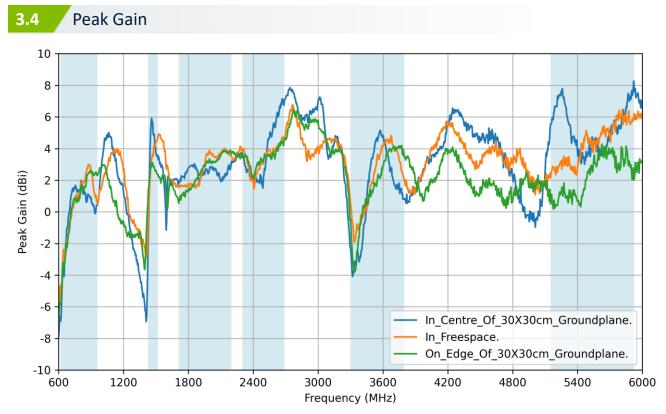









4.

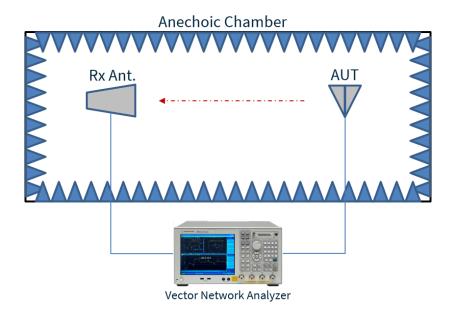

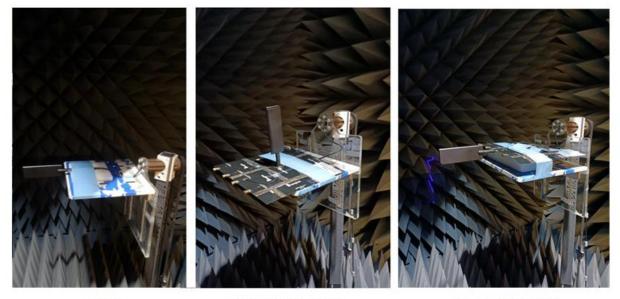


Free space


30x30cm Ground plane (Centre)

30x30cm Ground plane (Edge)




#### 4.2 30x30cm Ground plane (Centre) - Patterns at 650 MHz

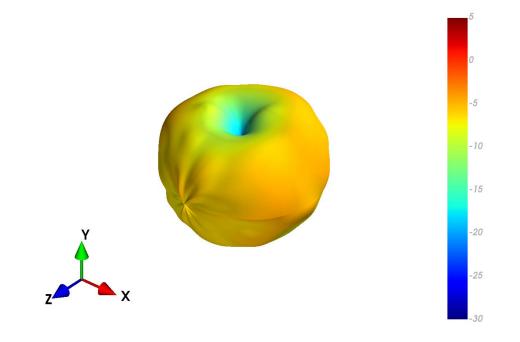


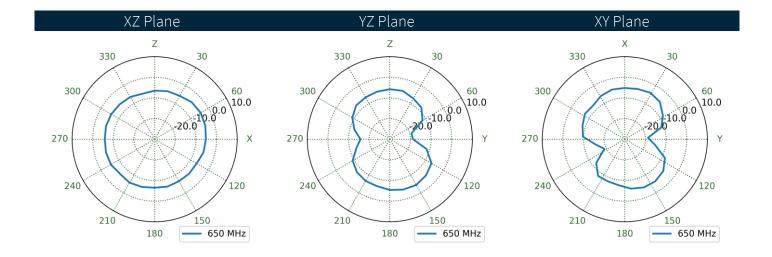






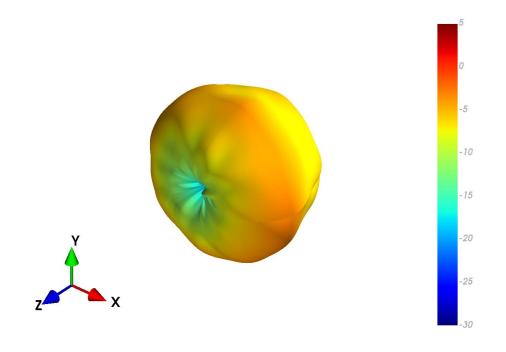


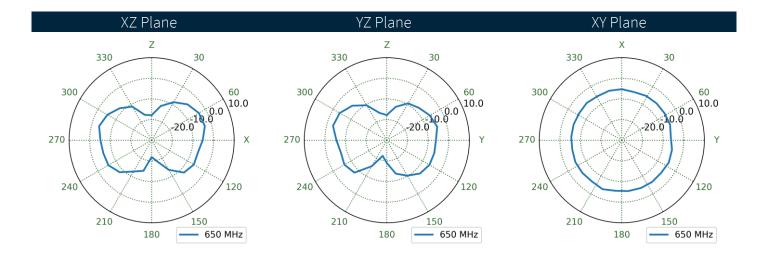




## 4.4 30x30cm Ground plane (Edge) - Patterns at 650 MHz

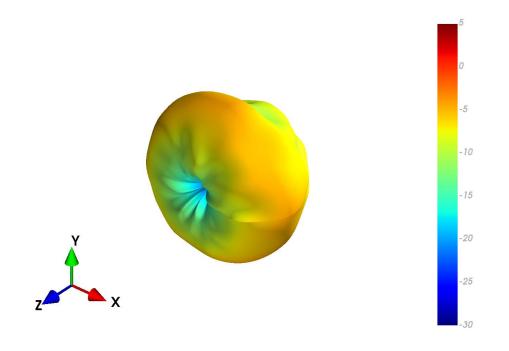


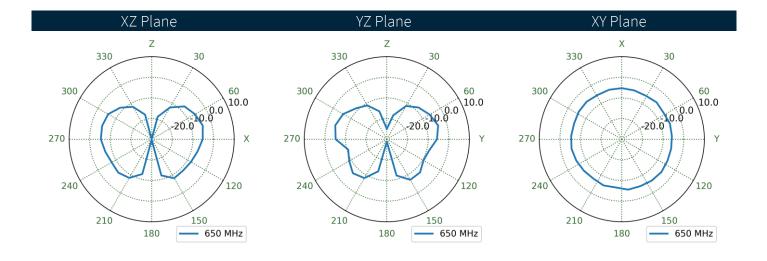




## 4.5 30x30cm Ground plane (Centre) - Patterns at 750 MHz

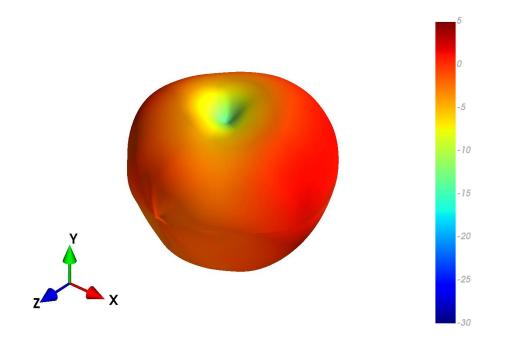


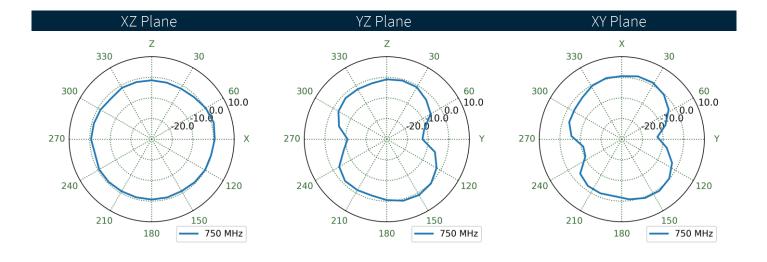






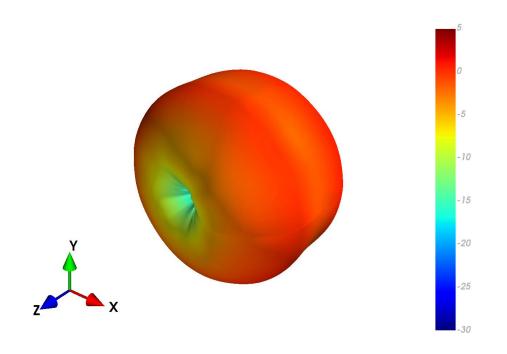


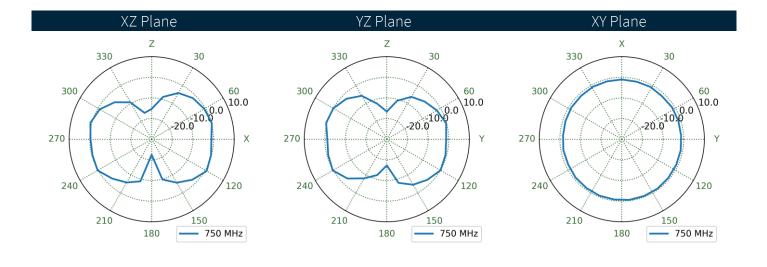




## 4.7 30x30cm Ground plane (Edge) - Patterns at 750 MHz

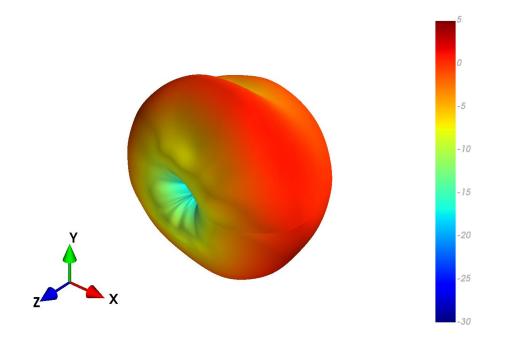


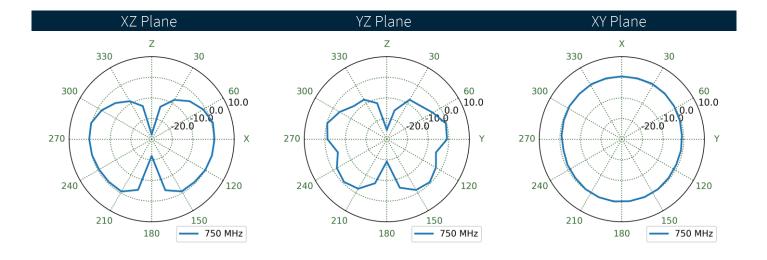




## 4.8 30x30cm Ground plane (Centre) - Patterns at 890 MHz

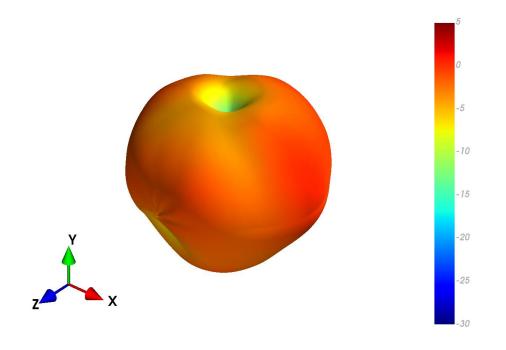


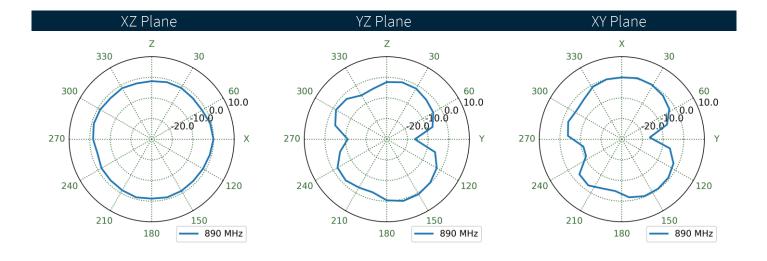






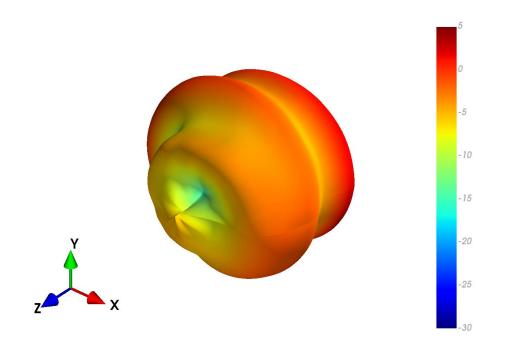


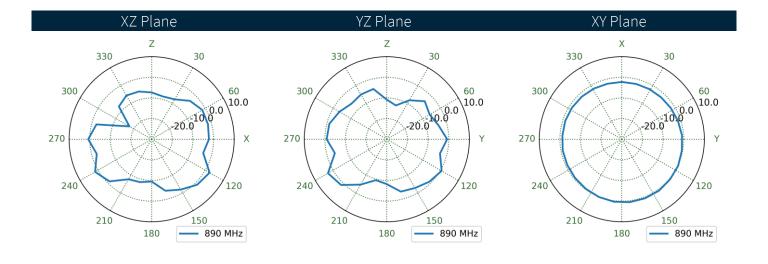




## 4.10 30x30cm Ground plane (Edge) - Patterns at 890 MHz

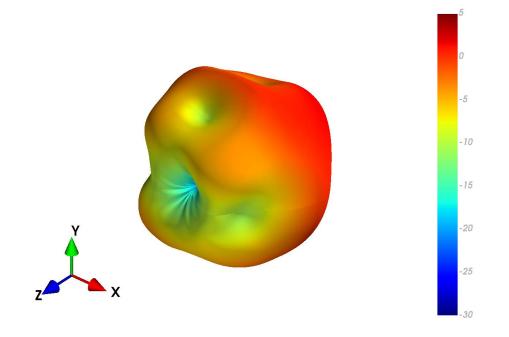


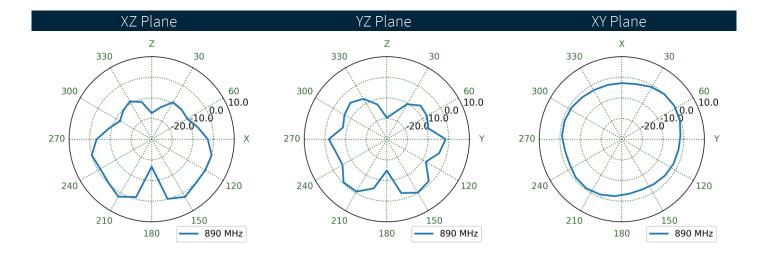




## 4.11 30x30cm Ground plane (Centre) - Patterns at 960 MHz

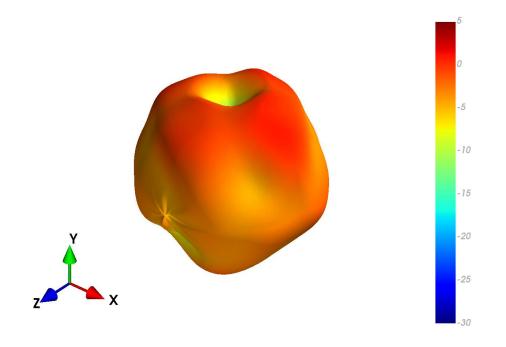


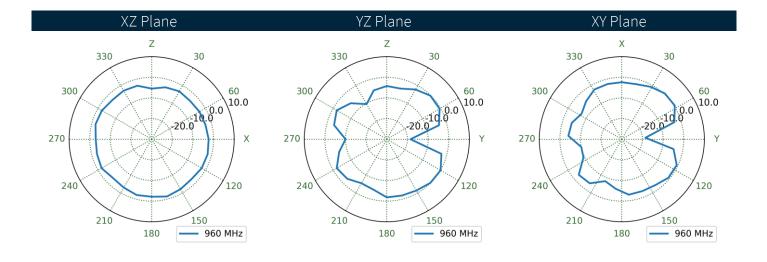






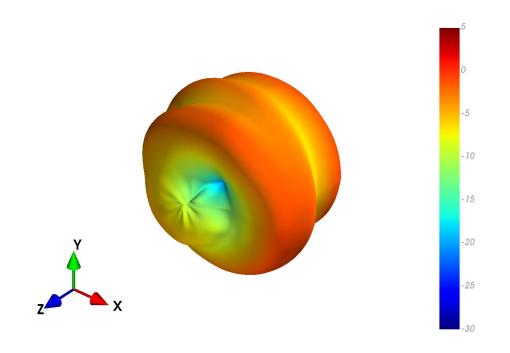


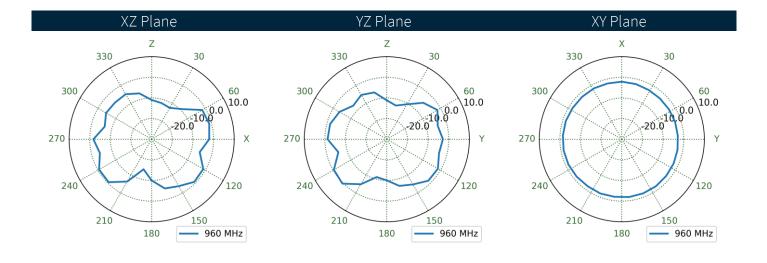




## 4.13 30x30cm Ground plane (Edge) - Patterns at 960 MHz

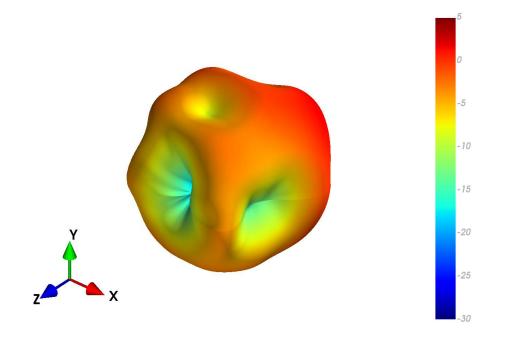


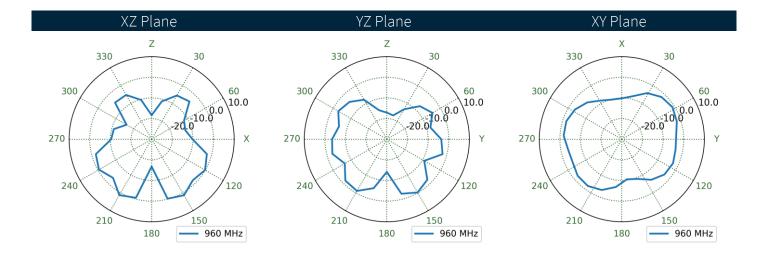




## 4.14 30x30cm Ground plane (Centre) - Patterns at 1470 MHz

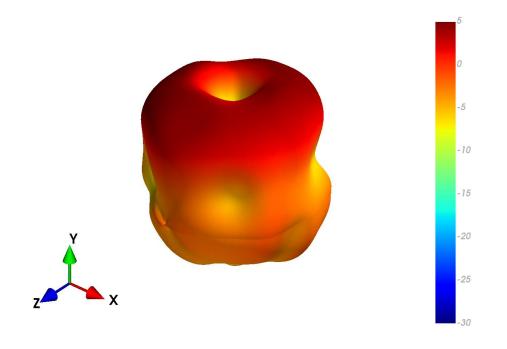


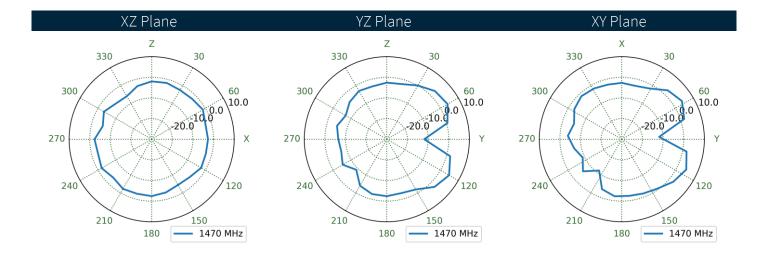






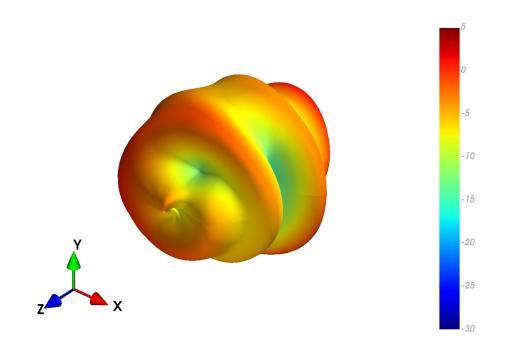


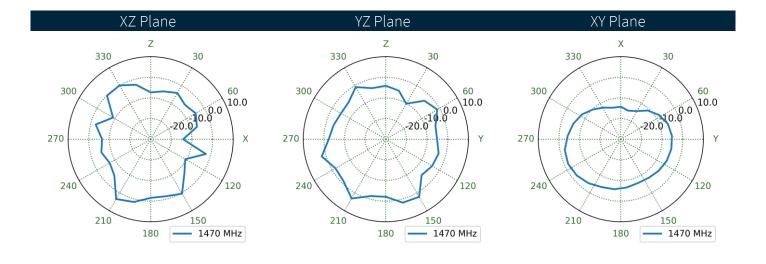




## 4.16 30x30cm Ground plane (Edge) - Patterns at 1470 MHz

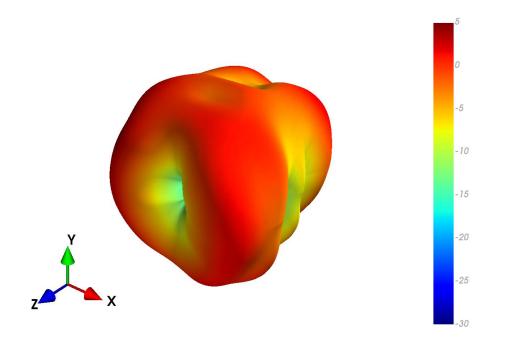


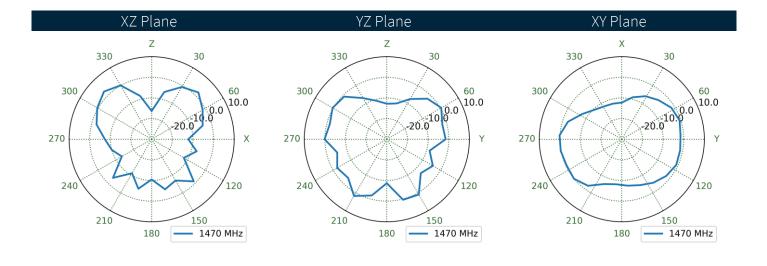




## 4.17 30x30cm Ground plane (Centre) - Patterns at 1805 MHz

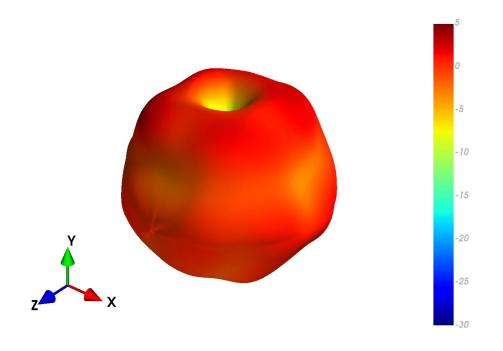


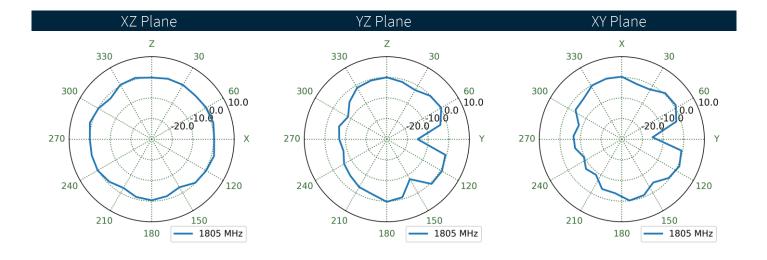






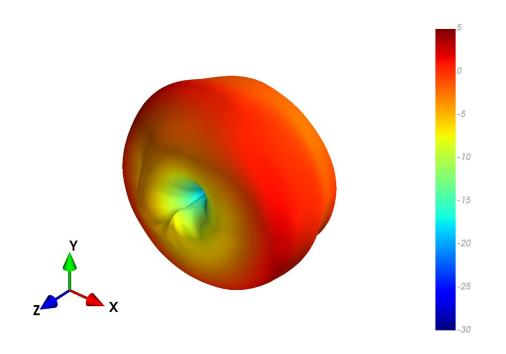


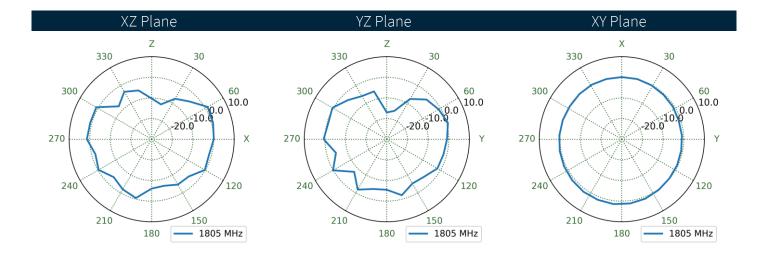




## 4.19 30x30cm Ground plane (Edge) - Patterns at 1805 MHz

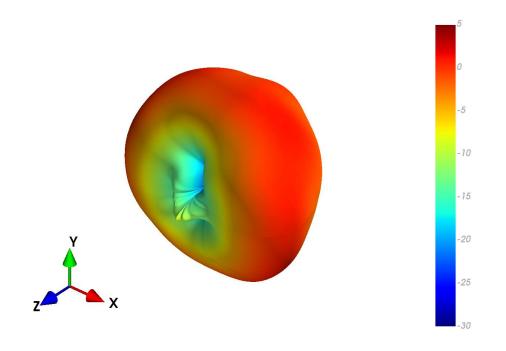


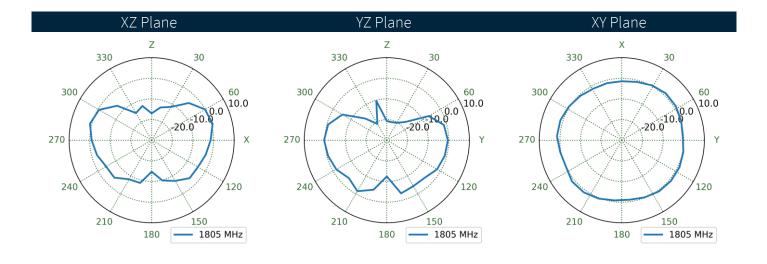




## 4.20 30x30cm Ground plane (Centre) - Patterns at 1920 MHz

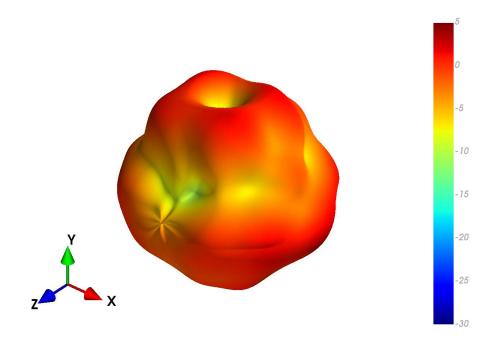


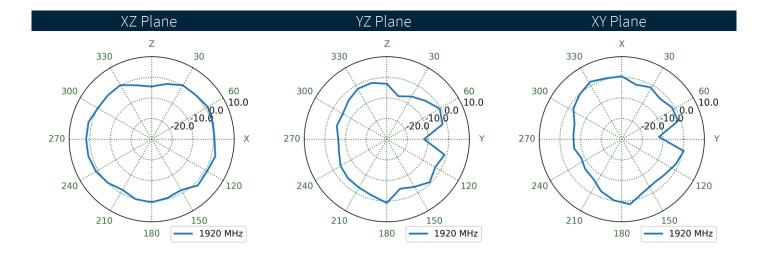






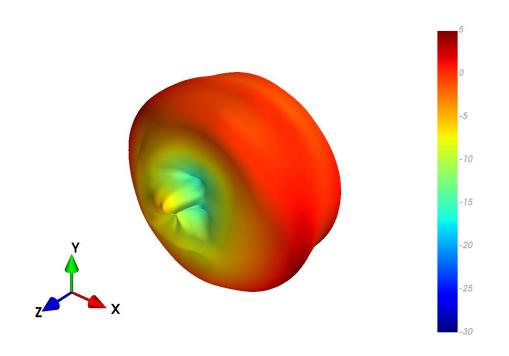


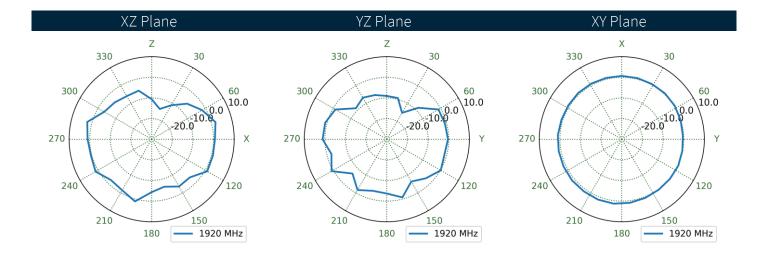




## 4.22 30x30cm Ground plane (Edge) - Patterns at 1920 MHz

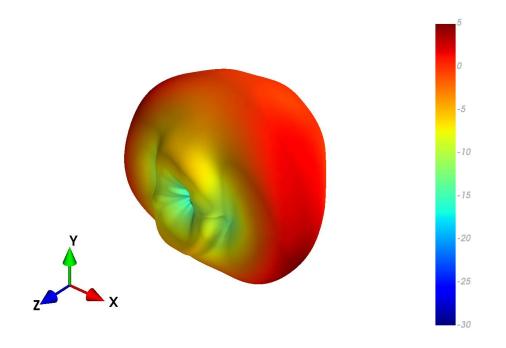


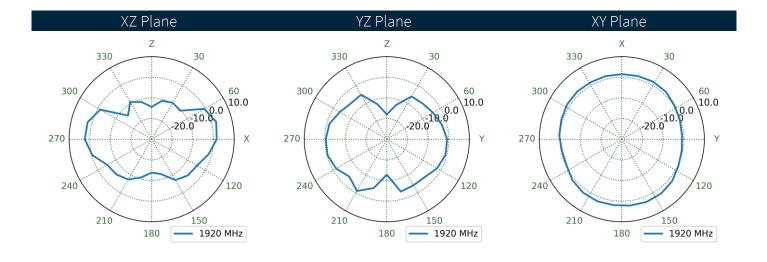




## 4.23 30x30cm Ground plane (Centre) - Patterns at 2595 MHz

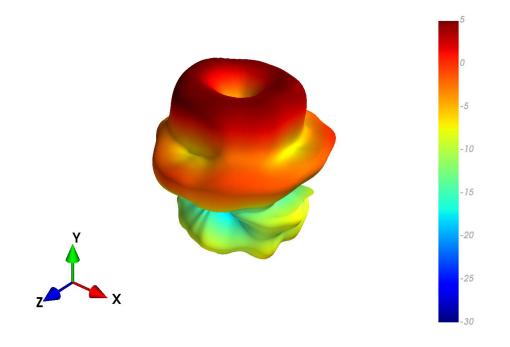


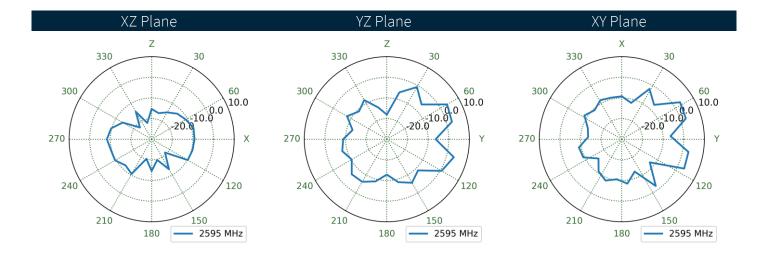






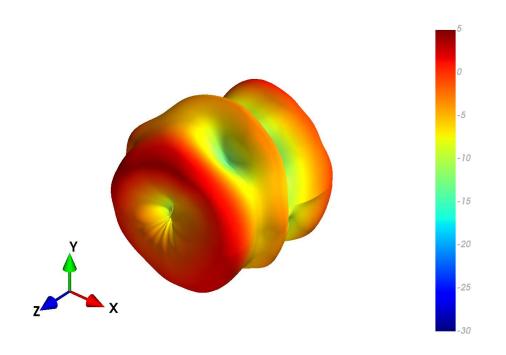


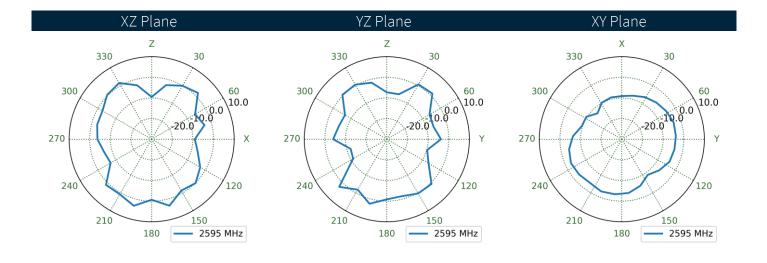




## 4.25 30x30cm Ground plane (Edge) - Patterns at 2595 MHz

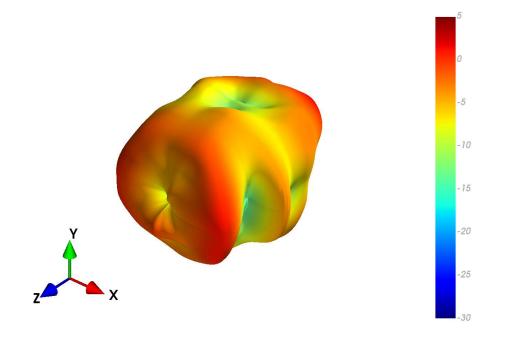


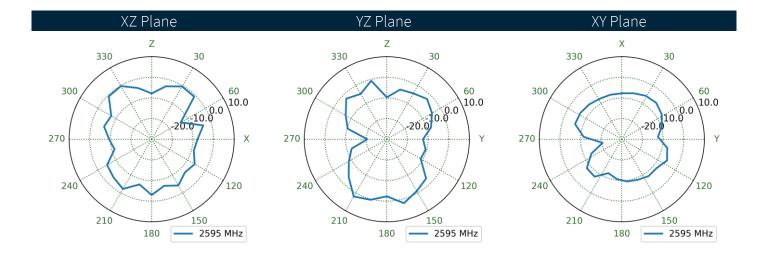




## 4.26 30x30cm Ground plane (Centre) - Patterns at 3500 MHz

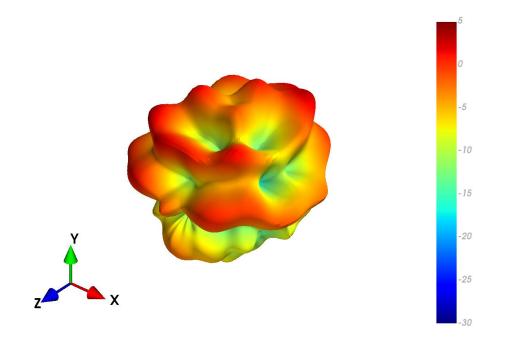


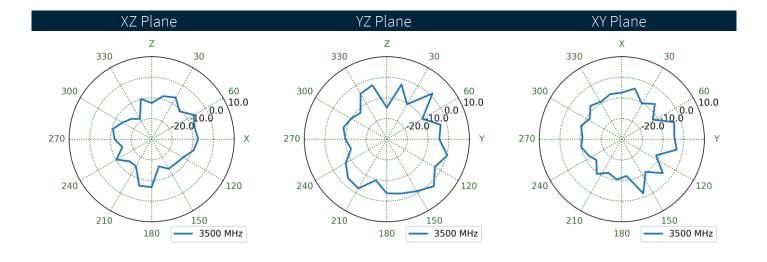






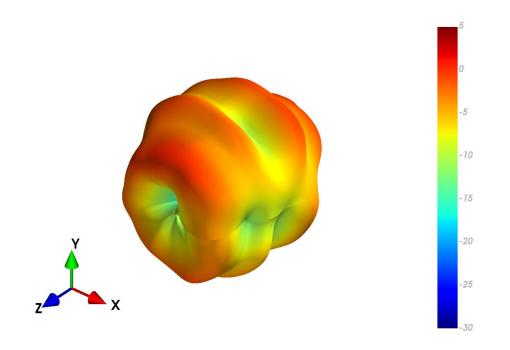


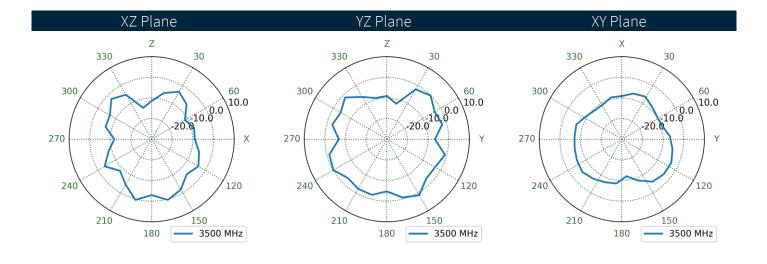




## 4.28 30x30cm Ground plane (Edge) - Patterns at 3500 MHz

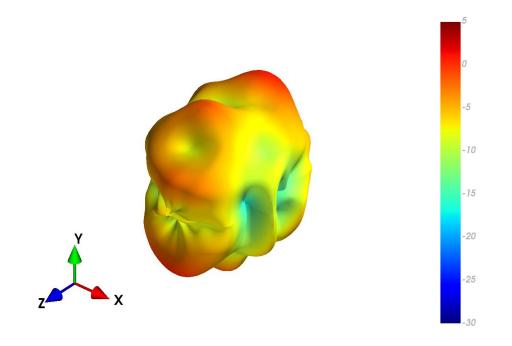


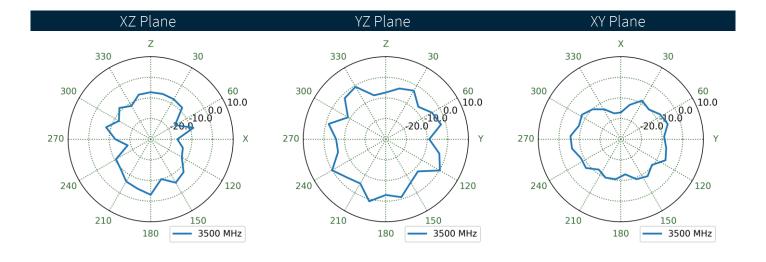




## 4.29 30x30cm Ground plane (Centre) - Patterns at 5150 MHz

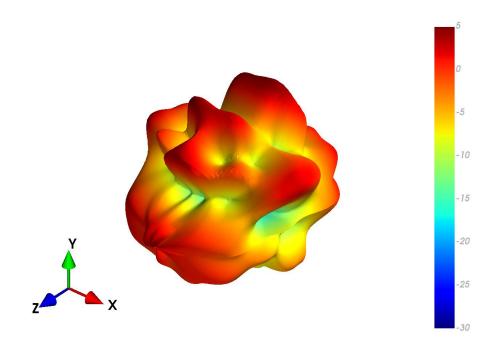


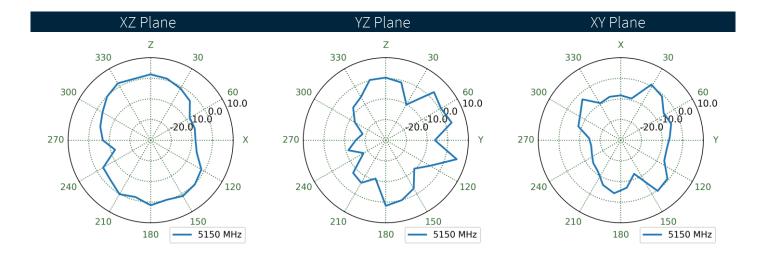






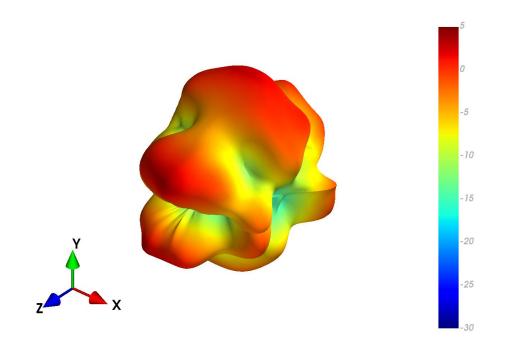


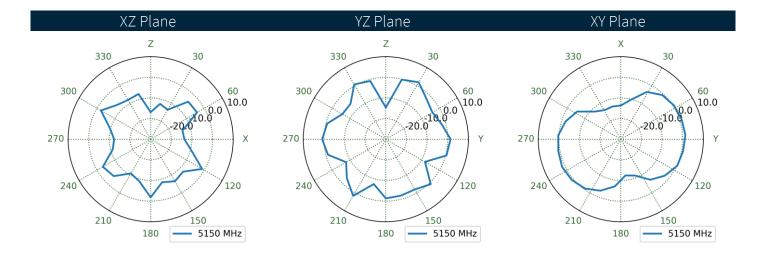



## 4.31 30x30cm Ground plane (Edge) - Patterns at 5150 MHz

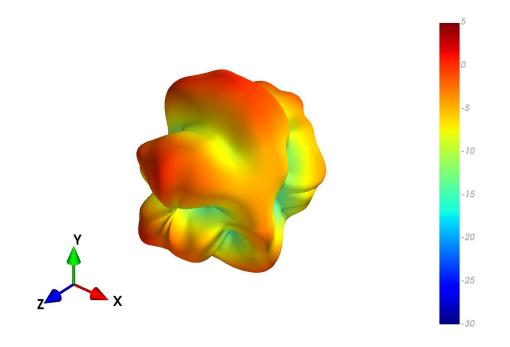

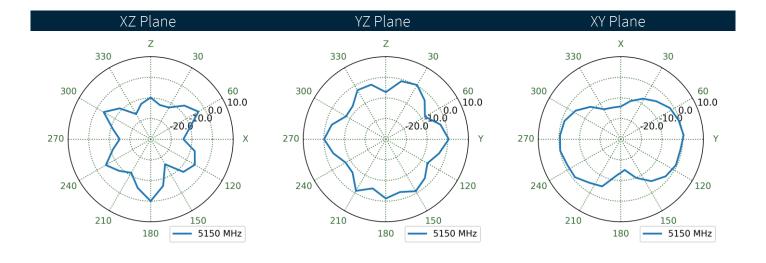



38

SPE-12-8-119-I




## 4.32 30x30cm Ground plane (Centre) - Patterns at 5550 MHz

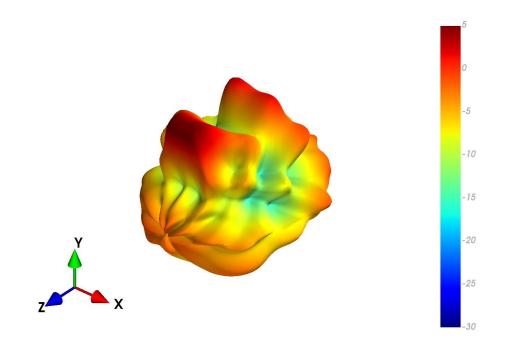


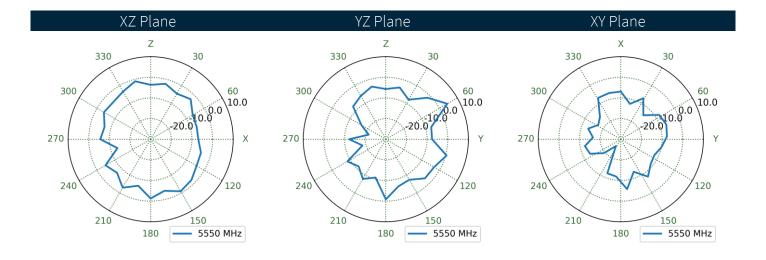






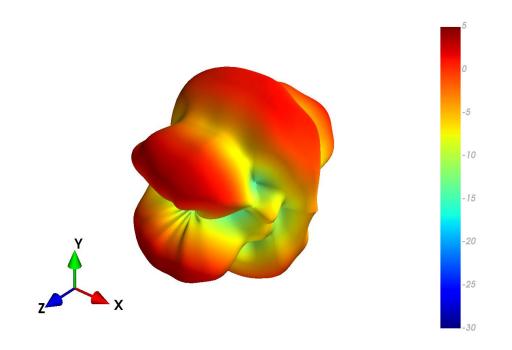


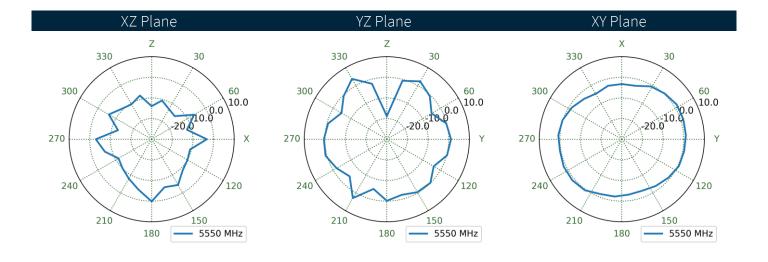




## 4.34 30x30cm Ground plane (Edge) - Patterns at 5550 MHz

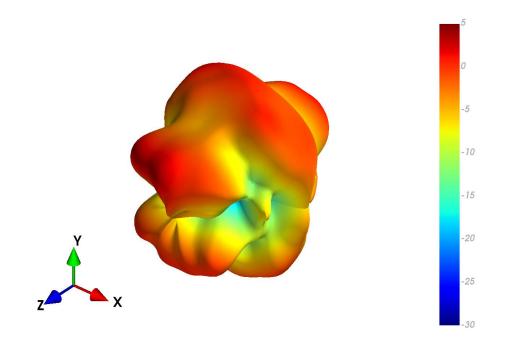


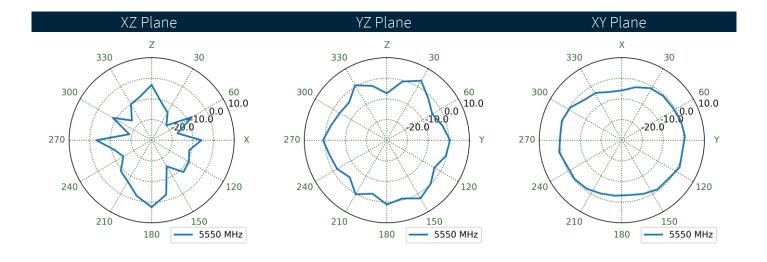



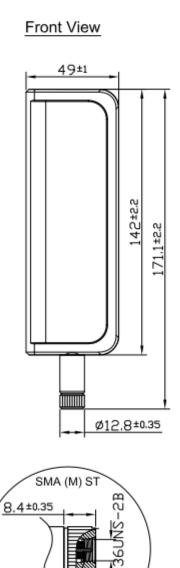

DETAIL +\*A\* SCALE: 4/1

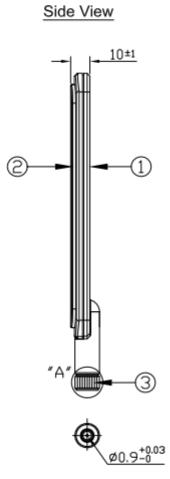


5.





1pc TG.30.8111W per Small PE Bag Small PE Bag Dimensions - 230\*130mm Weight - 127g

50pcs TG.30.8111W per Large PE Bag Large PE Bag Dimensions - 395\*338mm Weight - 6.35Kg

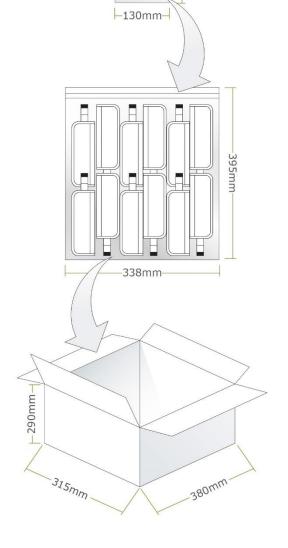

-230mm-

200pcs TG.30.8111W per carton Carton Dimensions - 315\*380\*290mm Weight - 6.5Kg



Changelog for the datasheet

#### SPE-12-8-119 - TG.30.0111W

Revision: I (Current Version)				
Date:	2023-01-18			
Changes:	Adding band 40 to spec table (full datasheet update).			
Changes Made by:	Gary West			

#### Previous Revisions

Revision: H		Revision: C	
Date:	2022-09-26	Date:	
Changes:	Updated specifications	Changes	
Changes Made by:	Cesar Sousa	Changes Made by:	Techni

Revision: G				
Date:	2022-05-17			
Changes:	Full datasheet template update and show data 600-6000.			
Changes Made by:	Gary West			

Revision: B				
Date:	2012-10-02			
Changes:				
Changes Made by:	Technical Writer			

Revision: F				
Date:	2018-11-30			
Changes:	Removed IP rating			
Changes Made by:	Jack Conroy			

Revision: A (Original First Release)				
Date: 2012-09-19				
Notes:				
Author:	Technical Writer			

Revision: E			
Date:	Unknown		
Changes:			
Changes Made by:	Technical Writer		

Revision: D	
Date:	2017-03-30
Changes:	Updated Spec with LTE table
Changes Made by:	Andy Mahoney





# www.taoglas.com