




TOP VIEW

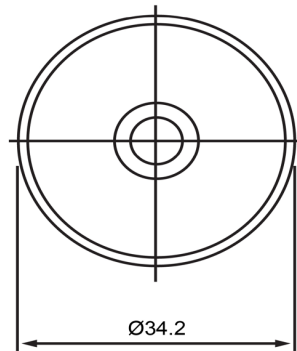

SIDE VIEW

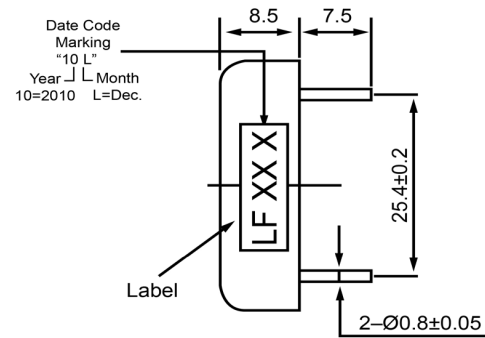

Specifications			Notes	Revision History									
Description	Value	Unit		Version	Description	Date	Approved	Drawn by	Date	Checked by	Date	Approved by	Date
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS  DB UNLIMITED	1	Released from Engineering	10/21/2013	J.S	A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013
Resonant Frequency	1,200	(Hz)											
Rated Voltage	9	(V)											
SPL @ 10cm	80	(dBA)											
Capacitance	45,000	(pF)											
Mount Type	Thru Hole												
Voltage Range	1 ~ 40	(V)											
Max Rated Current	7	(mA)											
Housing Material	PBT												
Operating Temperature	-20 ~ +60	°C											
Storage Temperature	-30 ~ +70	°C											
Weight	5	(g)											
				Piezo Transducer				TP341209-1					

Additional considerations can be found at www.dbunlimitedco.com/technical-articles.