



## E-Line Flux Remover & Maintenance Cleaner

Product# 1621-10S, 1621-10SB, 1621-5G, 1621-54G

### Product Description

E-Line is a hydrocarbon based defluxer formulated to be powerful, yet very economical. Eliminates brushing and scrubbing, saving time and materials. Micro-components and fine pitch leads are delicate and easily damaged, so brushing and scrubbing should be avoided if possible. Techspray aerosol solvents have a powerful spray and strong solvent that blasts off residues and cleans areas under components that a brush cannot touch.

### Features / Benefits


- Powerful cleaner
- Ideal for sensitive plastics
- Safe on electronics
- Rapid evaporation
- Zero residue
- Proven effective for lead-free processes
- Non-ozone depleting

### Call-Outs / Specifications

- FORD TOX#142431
- USDA Accepted K2

### Compatibility

Material Name	Compatibility
ABS:	Excellent
Nylon:	Excellent
Lexan:	Excellent
HDPE:	Excellent
LDPE:	Excellent
C.E. Phenolic:	Excellent
PMMA:	Excellent
POM:	Excellent
PP:	Excellent
PS:	Excellent
PTFE:	Excellent
PVC:	Excellent

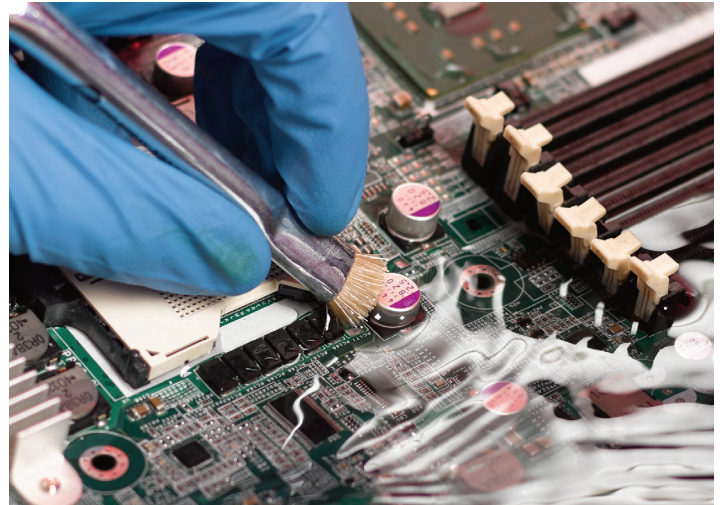

### Typical Product Data and Physical Properties

<b>ODOR:</b>	Characteristic hydrocarbon odor
<b>Appearance:</b>	Clear, Colorless liquid
<b>Percent volatile:</b>	100 at 20°C (68°F)
<b>Vapor Pressure:</b>	55.49 mmHg@20°C (VOC Composite Vapor Pressure)
<b>Flashpoint and method:</b>	(22°F) TAG CC
<b>Solubility in water:</b>	to 32 at 20°C (68°F)
<b>Evaporation Rate:</b>	> 1 (TCE=1)
<b>Density:</b>	0.713g/mL at 25°C
<b>VOC:</b>	Aerosol 75% Bulk 100%, 5.6 lbs/gal (671g/l)
<b>Shelf Life</b>	5 years

## E-Line Flux Remover & Maintenance Cleaner

Product# 1621-10S, 1621-10SB, 1621-5G, 1621-54G

### Usage Instructions

**FOR PROFESSIONAL OR INDUSTRIAL USE ONLY.** Disconnect equipment from power source.

Hold can 6-8 inches away. Directly spray to saturate soiled surface. Start at top of area to be cleaned using a sweeping motion, and spray the area slowly working towards the bottom. Angle the substrate to allow the solvent and soil to completely drain. To clean hard-to-reach areas (e.g. under components), insert extension tube in spray head to direct spray.

**For 1621-10SB with brush attachment** - Brush can be attached over the sprayer for greater scrubbing power. A final rinse is still recommended. To rinse, remove the brush and follow the instructions above.

Allow cleaned area to dry completely before applying current.

### Packaging and Availability

1621-10S	10oz. aerosol (284g)
1621-10SB	10oz. aerosol w/brush (284g)
1621-5G	5 gallon (19L)
1621-54G	54 gallon (205L)

### Environmental Policy

Techspray® is committed to developing products to ensure a safer and cleaner environment. We will continue to meet and sustain the regulations of all federal, state and local government agencies.

### Resources

Techspray® products are supported by global sales, technical and customer services resources.

For additional technical information on this product or other Techspray® products in the United States, call the technical sales department at 800-858-4043, email [tsales@techspray.com](mailto:tsales@techspray.com) or visit our web site at: [www.techspray.com](http://www.techspray.com).

**Important Notice to Purchaser/User:** The information in this publication is based on tests that we believe are reliable. The results may vary due to differences in tests type and conditions. We recommend that each user evaluate the product to determine its suitability for the intended application. Conditions of use are outside our control and vary widely. Techspray's only obligation and your only solution is replacement of product that is shown to be defective when you receive it. In no case will Techspray® be liable for any special, incidental, or consequential damages based on breach of warranty, negligence or any other theory.