



Items	Content Revised	Date
1		

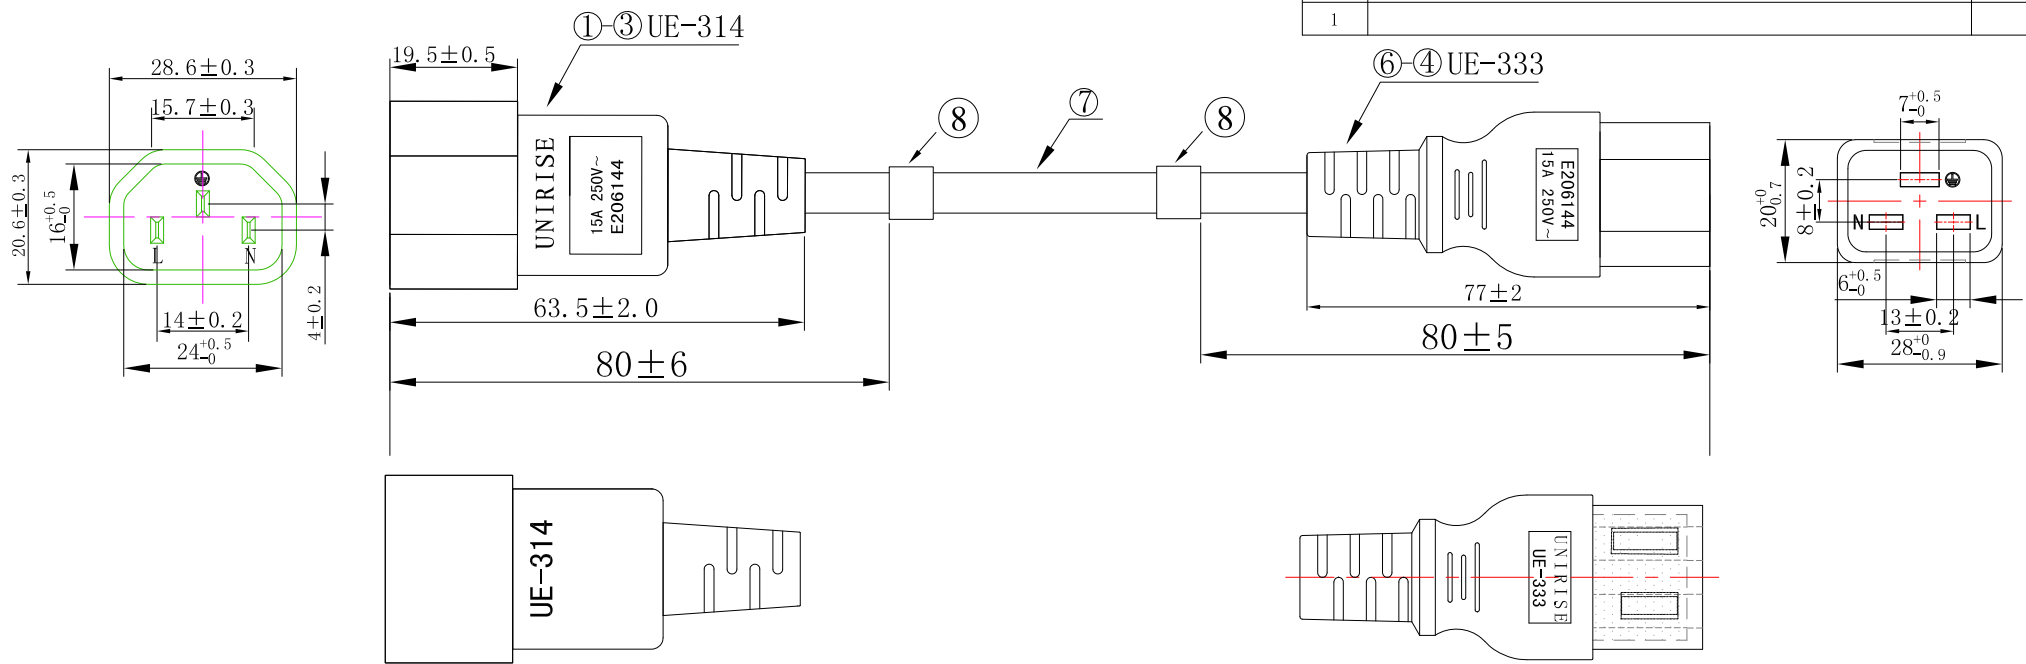

Technical requirements:



1. Plug: a:UE-333, Current (A) :15, Voltage (V) :250
b:UE-314, Current (A) :15, Voltage (V) :250
2. Cord: Soft SJT #14/3C 105°C unrise
3. High Voltage Tested: 1500V/S No Attacked, No Flicker
4. No nick, Spot, Mottle Nn Appearance and Wording is Clearly
5. The All Material Compliance with RoHS and REACH

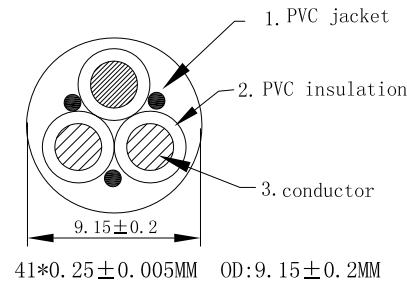

BOM表

Items	Part Number	Description	Q' TY	Colour
8	39005023	47x13mm PET Paster Length Label	2PCS	----
7	205353021026	SJT 14/3C 105°C Soft	1PCS	
6	306560220	PVC of plug 77A	/	
5	316333900	UE-333 Inside Shelf	1PCS	White
4	315333900	Blade of UE-333	3PCS	----
3	306560220	PVC of plug 77A	/	
2	315314900	Blade of UE-314	3PCS	----
1	316314220	UE-314 Inside Shelf	1PCS	Red

CORD MARKING: E176096 (UL) SJT VW-1 105°C 300V 3x2.08mm² (14AWG)
Or C(UL) SJT FT1 105°C 300V 3x2.08mm² (14AWG) UNIRISE

CUSTOMER CONFIRM	PWCD-C14C19-15A-XXF-YYY	XXF = LENGTH YYY = COLOR
Drawing No.:		Page: Version:A
Power Supply Cord: UE-333+UE-314		Approved by:jason
Customer:		Checked by:king
Colour:		Drawn by: songyu
Sample Part NO.: W009-005-2013	Unit: mm	Sheet: 1
		DATE: 2013-05-13