

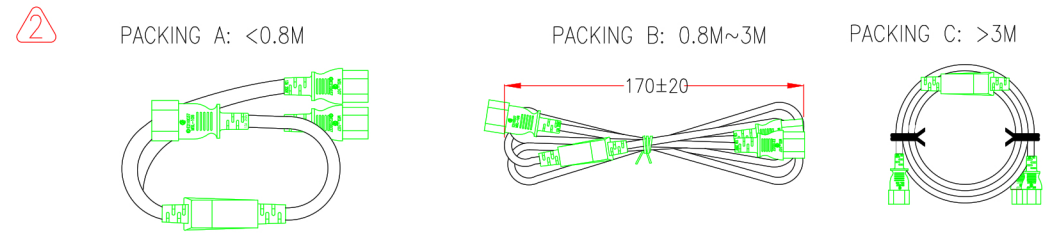


P1: M-004
 P2,P3: M-005
 P4: M-008

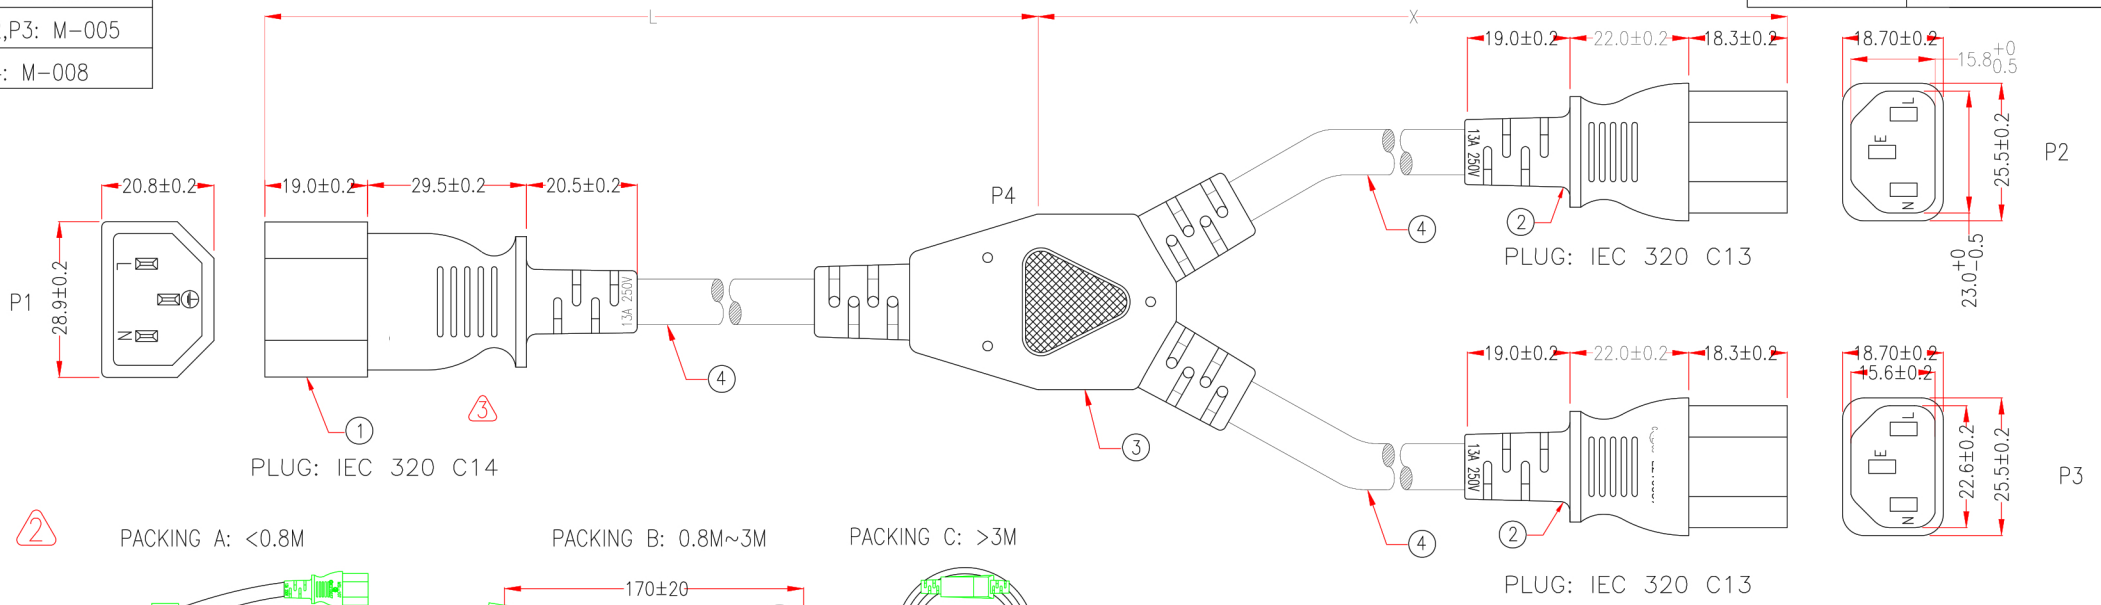

⚠ P1,P2,P3: cULus E210037
 ⚠ P4: UL E210037

*NOTE: ALL relevant materials are complied with RoHS directive.
 THE MARKING IS CONCAVE LETTERING MOULD

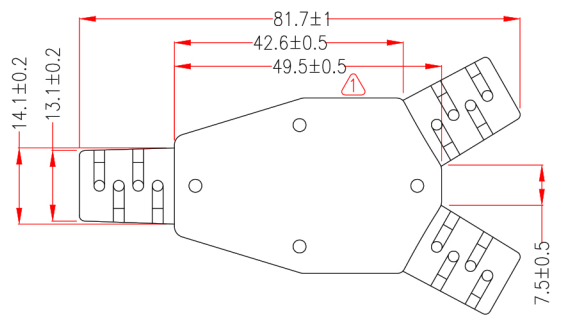

MARKING:
 (UL) SJT 3/C 16AWG(1.31MM²) VW-1 105°C 300V E204978 CSA
 SJT 3/C 1.31MM²(16AWG) FT2 105°C 300V 204790 MSL

| | P1 | P2 | P3 |
|-------|----|----|----|
| BLACK | L | L | L |
| WHITE | N | N | N |
| GREEN | E | E | E |

| No. | DESCRIPTION | Q'TY | Supplier |
|-----|--|----------------------|----------|
| 4 | UL SJT 16AWG*3C OD 8.5mm, JACKET BLACK, DRAWING No. EPSVT011603C-059 | Lmm*1PCS Xmm*2PCS | M304 |
| | MOLDED PVC 35P, COLOR BLACK | | M304 |
| 3 | BRACKET: YS-021 | 1 | M767 |
| | TERMINAL: 96146BS-0 | 3 | M257 |
| 2 | MOLDED PVC 35P, COLOR BLACK | | M304 |
| | BRACKET: YS-003 | 2 | M767 |
| 1 | TERMINAL: 2*4mm 98744BS-0/A | 6 | M257 |
| | MOLDED PVC 35P, COLOR BLACK | | M304 |
| 1 | BRACKET: YS-014 | 1 | M767 |
| | TERMINAL: 2x4mm 98672BS-1 | 3 | M257 |

APPROVED: [Signature]

CHECKED: HU 18/AUG/17 DRAWN NAME: POWER SUPPLY CORDS & CORDS SETS

DRAWING: XU 18/AUG/17 PRODUCT NO.: PWCD-C13X2C14-13A-03F-BLK

UNIT: mm

UNC

Cable Length Unless Other Spec. Tolerances:
 0 ~200mm ±10mm
 201~1000mm ±20mm
 1001 ~1500mm ±25mm
 1501~2100mm ±30mm
 2100mm± ±40mm

REV.3 2017.08.18 MODIFY CABLE MOLDED & MOLDED GOLO
 REV.1 2016.04.11 MODIFY P4 LOGO REV.2 2016.08.01 MODIFY PACKING
 NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm