


Specifications:
 Current Rating:1.0A AC/DC
 Voltage Rating:30V AC/DC
 Contact Resistance:30m ohm. Max.
 Insulation Resistance:1,000M ohm. min.
 Withstanding Voltage:500V AC For One Minute
 Operating Temperature Range:-40°C ~ +105°C

Material And Finish
 Insulator:PBT (UL94V-0)
 Contact:Phosphor Bronze
 Plating:Gold Plated on Contact Area,
 Tin Plated on Solder Tail.
 Shell:Brass, Nickel Plated

How To Order
 USB-A1VSXX149

- 6:Gold Plated on Contact Area
- 7:Selective Gold Plated 15u"
- 8:Selective Gold Plated 30u"
- B: Black
- W: White

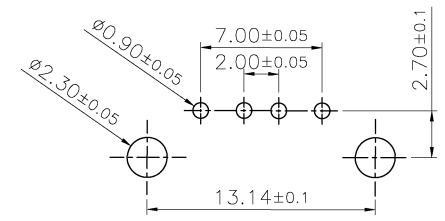


P.C.B Layout

RoHS Compliant

F			
E			
D			
C			
B	15-SEP-2021	Change Tray icon	Lisy Liu
A	15-NOV-2018		Jack Huang
REV	DATE	FILE	BY

DRAWN: Jack Huang	GENERAL TOLERANCE: .X=±0.20 .XX=±0.10
CHECKED: Jerry Chen	
APPROVAL: Mike Wu	

OST	
ON-SHORE TECHNOLOGY, INC.	
DESCRIPTION: USB A Type PCB Socket Top Entry	SIZE
PART NO: USB-A1VSXX 149	



A

B

C

D