


ELECTRICAL TEST:

- 1.100% OPEN & SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE:2 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms



NO	DESCRIPTION	Q'TY	UNIT	REV.	ECN NO.	DESCRIPTION	DATE	CHANGER
8	45P PVC Color:White	10	g					
7	Transparent PE	2	g					
6	USB3.1 TYPE C Tinplate Shell Nickel Plated	1	pcs					
5	USB3.1 TYPE C ABS Shell Color:White	1	pcs					
4	USB3.1 C Type Connector With PCB Shell Nickel Plated	1	pcs					
3	DP F ABS Shell Color:White	1	pcs					
2	With PCB(IC:VL100 ,PI3DPX1203 )	1	pcs					
1	USB3.1 [34AWG (7/0.06TC)+EAM]*4P+34AWG (7/0.06TC)*2C+28AWG (7/0.127TC)*2C+34AWG (7/0.06TC)*4C+AB (16/9/0.06 75%TC)OD3.9MM Color:White	0.16	m					

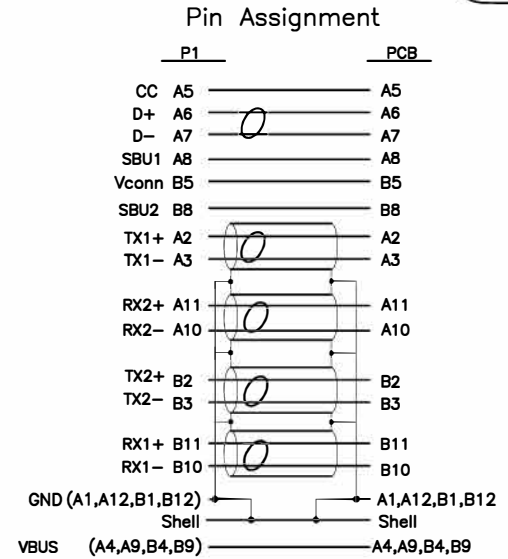

TITLE: USB 3.1 TYPE C TO DP F

CUSTOMER :  
CUSTOMER P/N : USBC-DPF-ADPT

SCALE NONE  
UNIT MM

DATE 2017.08.25  
DRAWING NO.:  
REV. A01  
1/1