


Pin Assignment

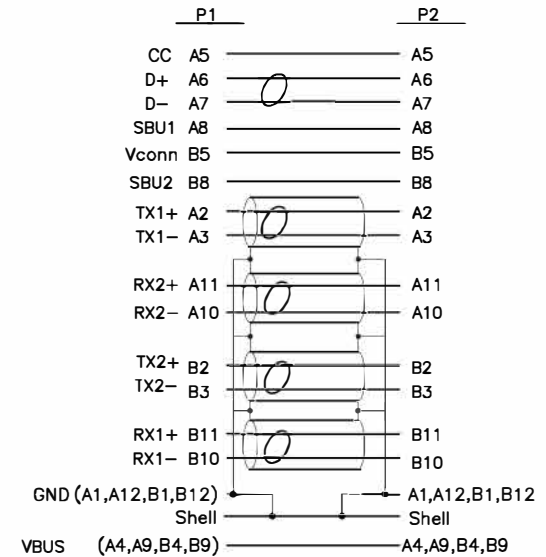

Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 3 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot:300V DC/10ms

L	P/N
915±20MM	USBC-HDMI-03F
1830±30MM	USBC-HDMI-06F
3050±50MM	USBC-HDMI-10F

Resolution: 4K*2K@60Hz

NO	DESCRIPTION	Q'TY	UNIT	TOLERANCE			TITLE:	CUSTOMER :	CUSTOMER NO.:	DRAWING NO.:	REV.
				INCHES	M/M						
6	Transparent PE	3	g	.X	.015	.30	USB TYPE C TO HDMI	CUSTOMER :	CUSTOMER NO.:	DRAWING NO.:	REV.
5	45P PVC Color: Black	12	g	.XX	.010	.10					
4	HDMI AM ABS SHELL Color: Black	1	pcs	.XXX	.005	.05					
3	USB3.1 C Type Connector With PCB SHELL Gold Plated	1	pcs	DRAWN BY			SCALE	NONE	DRAWING NO.:	REV.	
2	UTCUH-9FT-VIA With PCB SHELL Gold Plated	1	pcs	CHECK BY			UNIT	MM			
1	USB 3.1 [34AWG(7/0.06TC)+EAM]*4P+32AWG(7/0.08TC)*2C+26AWG(7/0.16TC)*2C+32AWG(7/0.08TC)*4C+AB(16/10/0.08 85%TC) OD: 4.2MM Color: Black	L	m	APPD BY			DATE	2018.05.04			A01
NO	DESCRIPTION	Q'TY	UNIT							1/2	

