

“Stay Connected” with




HEYware Products

a PennEngineering® Company

## Heyco® Vinyl Coated Steel Clamps

### Screw Mount


PART NO.	DESCRIPTION	PART DIMENSIONS									
		A		B		C		D		Coating Length	
		Overall Length	Flange Diameter	Arm Width	Mounting Hole Dia.	in.	mm.	in.	mm.	in.	mm.
12067	VCSC 087-18	.87	22,1	.32	8,1	.18	4,6	.18	4,6	.47	11,9
12068	VCSC 110-12	1.10	27,9	.32	8,1	.12	3,0	.12	3,0	.71	18,0
12069	VCSC 134-12	1.34	34,0	.24	6,1	.08	2,0	.12	3,0	.94	23,9
12070	VCSC 137-14	1.38	35,1	.32	8,1	.20	5,1	.14	3,6	.98	24,9
12071	VCSC 157-14	1.57	39,9	.32	8,1	.12	3,0	.14	3,6	1.18	30,0
12072	VCSC 177-17	1.77	45,0	.35	8,9	.16	4,1	.17	4,3	1.38	35,1
12073	VCSC 189-12	1.89	48,0	.24	6,1	.08	2,0	.12	3,0	1.57	39,9
12074	VCSC 213-13	2.13	54,1	.24	6,1	.14	3,6	.13	3,3	1.81	46,0
12075	VCSC 213-18	2.13	54,1	.32	8,1	.19	4,8	.18	4,6	1.65	41,9
12076	VCSC 252-17	2.52	64,0	.32	8,1	.20	5,1	.17	4,3	2.09	53,1
12077	VCSC 260-13	2.60	66,0	.31	7,9	.18	4,6	.13	3,3	2.17	55,1
12078	VCSC 299-18	2.99	75,9	.32	8,1	.18	4,6	.18	4,6	2.56	65,0
12079	VCSC 299-28	2.99	75,9	.43	10,9	.20	5,1	.28	7,1	2.44	62,0
12080	VCSC 331-18	3.31	84,1	.32	8,1	.18	4,6	.18	4,6	2.83	71,9
12081	VCSC 496-18	4.96	126,0	.32	8,1	.24	6,1	.18	4,6	4.41	112,0

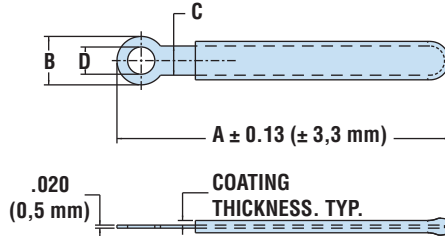

VCSC SCREW MOUNT

### Spring Clamps

PART NO.	DESCRIPTION	PART DIMENSIONS							
		A		B		C		D	
		Length	Clamping Height	Clamping Length	Mounting Hole	in.	mm.	in.	mm.
12710	VCSP-161-09	1.61	40,9	.09	2,3	1.19	30,2	.156	4,0
12711	VCSP-263-09	2.63	66,8	.09	2,3	2.24	56,9	.156	4,0



VCSP

Material VCSC Body: Soft steel, electrogalvanized .02" (0,5 mm) thick  
 VCSP Body: Stainless steel, w/vinyl coating .02" (0,5 mm) thick  
 Coating: Soft, PVC, .032" (0,8 mm) minimum thickness



- Flexible soft steel easily bends and forms to desired shape and holding diameter.
- Vinyl coating both grips and insulates the cable or wire bundle.



- This vinyl coated spring steel clamp secures round cable, ribbon cable and tubing.
- Vinyl coating protects and insulates.
- Mounts with a #6 (M3.5) screw, yet cable can be inserted and removed without removing the clip.

Quick Specs