


WJ2CDGM-5.08  
PLUG-IN TERMINAL BLOCK



PCB connector  
Rated current: 15 A  
Rated voltage: 300 V  
Pitch: 5.08 mm

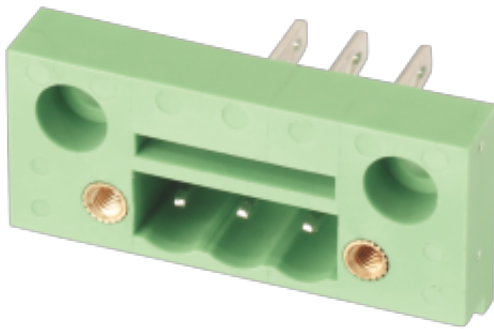

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	-	300
Rated Current [A]	15	-	10
Wire Range [AWG]	/		
Dielectric Voltage-Withstand	1.6KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	320	320	630
Rated Current [A]	12	12	12
Impulse withstand voltage [KV]	4	4	4
Conductor cross section[solid/flexible] [mm <sup>2</sup> ]	/		


Material

Insulation Material	PA66
Flame retardant rating	UL94V-0

WJ2CDGM-5.08  
 PLUG-IN TERMINAL BLOCK

Conductor Material	Copper alloy
Plating of conductor surface	Sn plated
<b>Other Data</b>	
Pitch/Poles [mm]/[P]	5.08/2-24
Stripping Length [mm]	/
Screw/Torque(Max)[N.m]	/
Operating temperature [°C]	
Soldering temperature	260°C/5S
Pin dimensions [mm]	/
PCB Hole Diameter [mm]	/

**Dimensions**

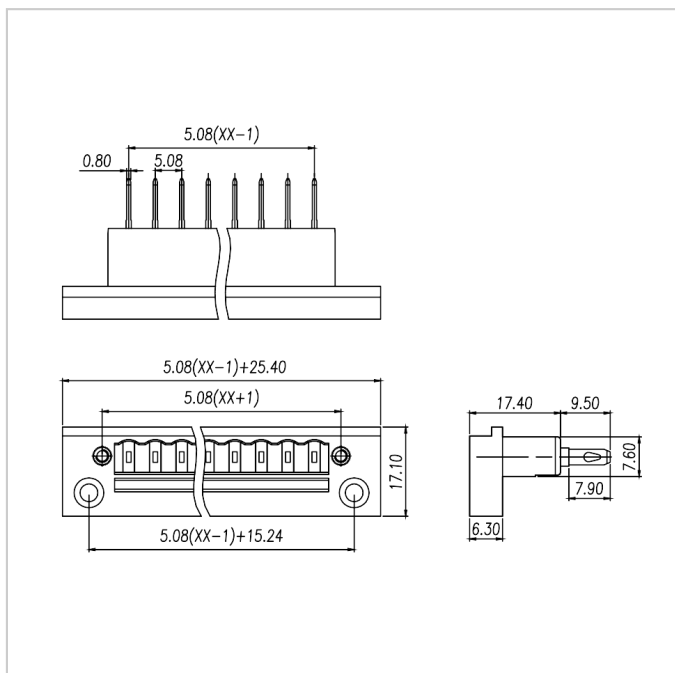

**Accessories**