


PTRA094858NF


Thermally-Enhanced High Power RF LDMOS FET 400 W, 48 V, 859 – 960 MHz

Description

The PTRA094858NF is a 400-watt Doherty LDMOS transistor intended for use in multi-standard cellular power amplifier applications in the 859 to 960 MHz frequency band. Features include input and output matching, high gain and thermally-enhanced package with earless flange. Manufactured with Wolfspeed's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.



PTRA094858NF
Package PG-HBSOF-6-3

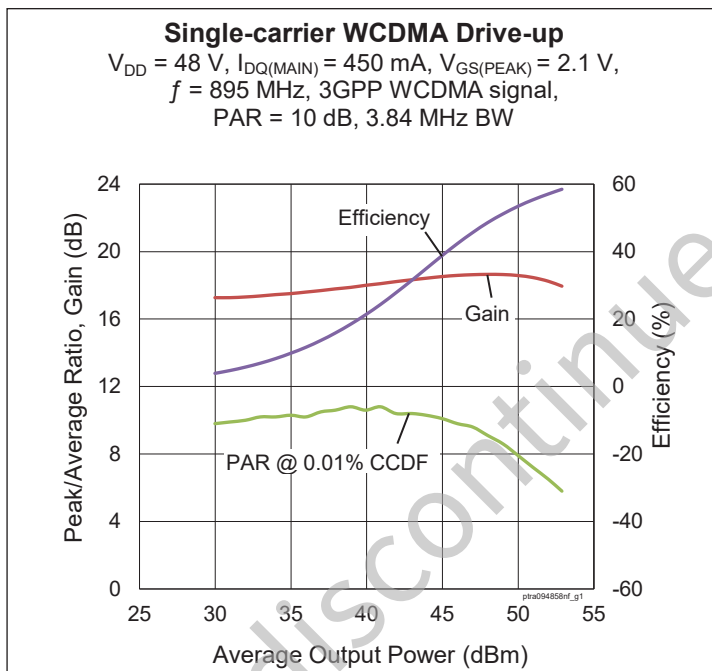

Features

- Broadband internal input and output matching
- Asymmetrical Doherty design
 - Main : $P_{1dB} = 150\text{ W Typ}$
 - Peak : $P_{1dB} = 250\text{ W Typ}$
- Typical Pulsed CW performance, 895 MHz, 48 V, Doherty configuration, 10 μsec pulse width, 10% duty cycle, class AB
 - Output power at $P_{1dB} = 400\text{ W}$
 - Output power at $P_{3dB} = 500\text{ W}$
 - Efficiency = 63%
 - Gain = 18.5 dB
- Capable of handling 10:1 VSWR @ 48 V, 87 W (CW) output power
- Integrated ESD protection
- Human Body Model Class 1C (per ANSI/ESDA/JEDEC JS-001)
- Low thermal resistance
- Pb-free and RoHS compliant

RF Characteristics

Single-carrier WCDMA Specifications (tested in Wolfspeed Doherty test fixture)

$V_{DD} = 48\text{ V}$, $I_{DQ} = 450\text{ mA}$, $P_{OUT} = 87\text{ W avg}$, $V_{GS(PEAK)} = 2.1\text{ V}$, $f = 895\text{ MHz}$, 3GPP signal, channel bandwidth = 3.84 MHz, peak/average = 10 dB @ 0.01% CCDF

| Characteristic | Symbol | Min | Typ | Max | Unit |
|------------------------------|----------|------|-------|-------|------|
| Gain | G_{ps} | 16.8 | 17.75 | — | dB |
| Drain Efficiency | η_D | 48 | 52 | — | % |
| Adjacent Channel Power Ratio | ACPR | — | -29 | -26.5 | dBc |
| Output PAR @ 0.01% CCDF | OPAR | 6.5 | 7.2 | — | dB |

All published data at $T_{CASE} = 25^\circ\text{C}$ unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

DC Characteristics

| Characteristic | Conditions | Symbol | Min | Typ | Max | Unit |
|--------------------------------|--|---------------|-----|------|-----|---------------|
| Drain-Source Breakdown Voltage | $V_{GS} = 0\text{ V}, I_{DS} = 10\text{ mA}$ | $V_{(BR)DSS}$ | 105 | — | — | V |
| Drain Leakage Current | $V_{DS} = 48\text{ V}, V_{GS} = 0\text{ V}$ | I_{DSS} | — | — | 1 | μA |
| | $V_{DS} = 105\text{ V}, V_{GS} = 0\text{ V}$ | I_{DSS} | — | — | 10 | μA |
| Gate Leakage Current | $V_{GS} = 10\text{ V}, V_{DS} = 0\text{ V}$ | I_{GSS} | — | — | 1 | μA |
| On-State Resistance (Main) | $V_{GS} = 10\text{ V}, V_{DS} = 0.1\text{ V}$ | $R_{DS(on)}$ | — | 0.2 | — | Ω |
| | (Peak) $V_{GS} = 10\text{ V}, V_{DS} = 0.1\text{ V}$ | $R_{DS(on)}$ | — | 0.13 | — | Ω |
| Operating Gate Voltage (Main) | $V_{DS} = 48\text{ V}, I_{DQ} = 450\text{ mA}$ | V_{GS} | 3.4 | 3.6 | 3.9 | V |
| | (Peak) $V_{DS} = 48\text{ V}, I_{DQ} = 0\text{ mA}$ | V_{GS} | — | 2.1 | — | V |

Maximum Ratings

| Parameter | Symbol | Value | Unit |
|---------------------------|-----------|-------------|--------------------|
| Drain-Source Voltage | V_{DSS} | 105 | V |
| Gate-Source Voltage | V_{GS} | -6 to +12 | V |
| Operating Voltage | V_{DD} | 0 to +55 | V |
| Junction Temperature | T_J | 225 | $^{\circ}\text{C}$ |
| Storage Temperature Range | T_{STG} | -65 to +150 | $^{\circ}\text{C}$ |

1. Operation above the maximum values listed here may cause permanent damage. Maximum ratings are absolute ratings; exceeding only one of these values may cause irreversible damage to the component. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. For reliable continuous operation, the device should be operated within the operating voltage range (V_{DD}) specified above.

2. Parameters values can be affected by end application and product usage. Values may change over time.

Thermal Characteristics

| Parameter | Symbol | Value | Unit |
|--|-----------------|-------|-----------------------------|
| Thermal Resistance (main, $T_{CASE} = 70^{\circ}\text{C}$, 87.1 W CW) | $R_{\theta JC}$ | 0.41 | $^{\circ}\text{C}/\text{W}$ |





Moisture Sensitivity Level

| Level | Test Signal | Package Temperature | Unit |
|-------|---------------------|---------------------|--------------------|
| 3 | IPC/JEDEC J-STD-020 | 260 | $^{\circ}\text{C}$ |



Ordering Information

| Type and Version | Order Code | Package | Shipping |
|--------------------|--------------------|--------------|----------------------|
| PTRA094858NF V1 R5 | PTRA094858NF-V1-R5 | PG-HBSOF-6-3 | Tape & Reel, 500 pcs |

Typical Performance (data taken in test fixture)

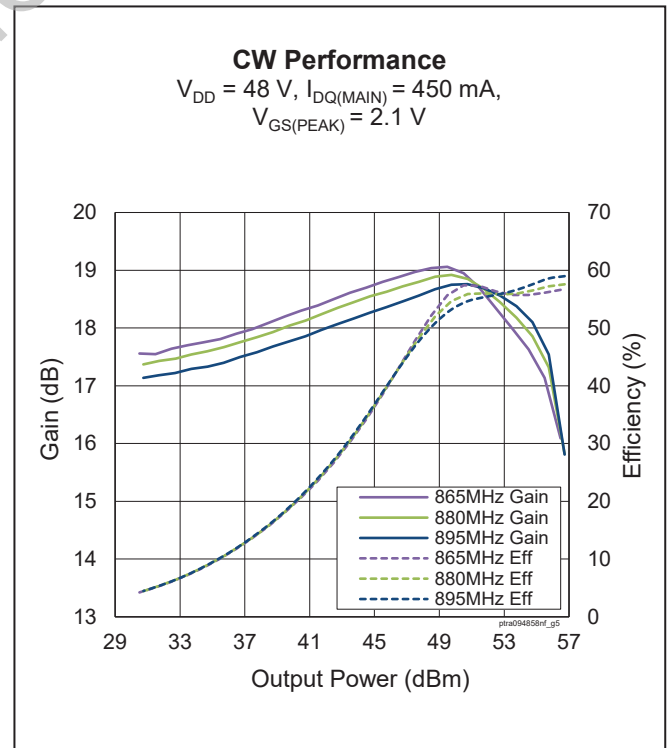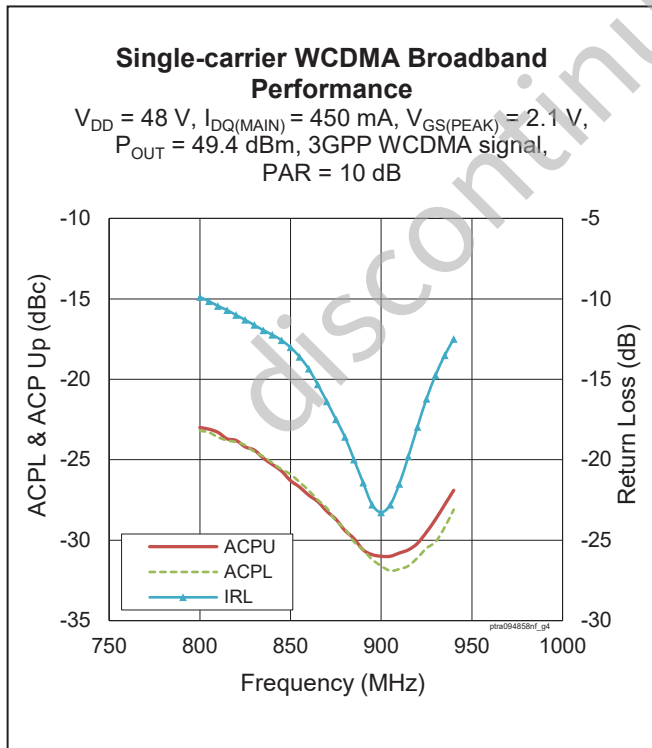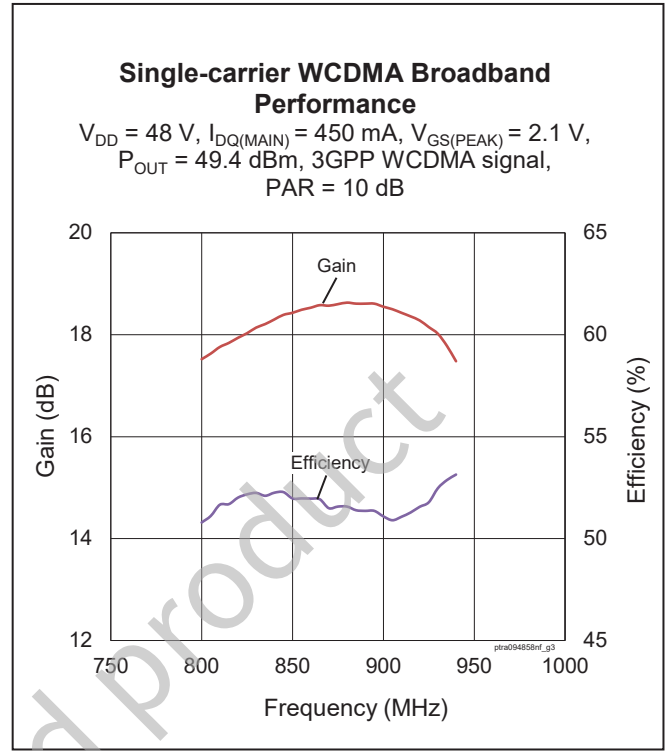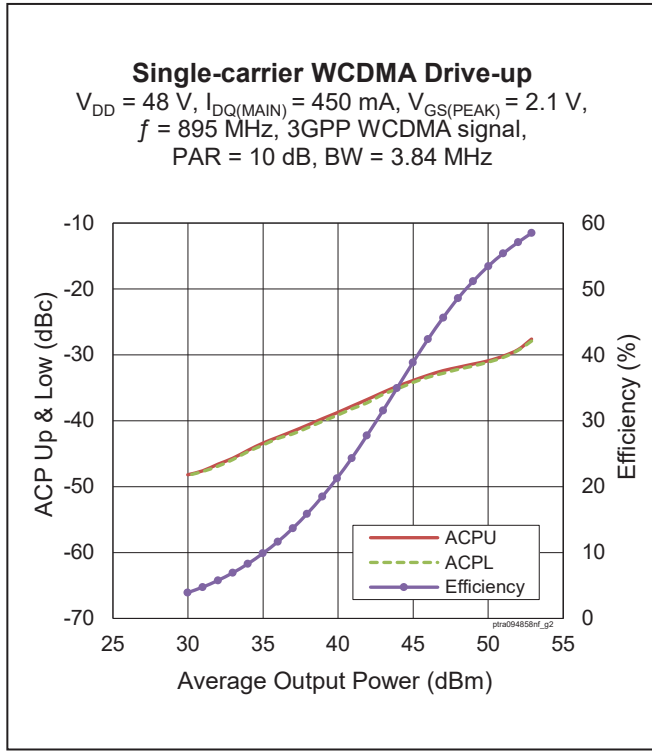

Typical Performance (cont.)

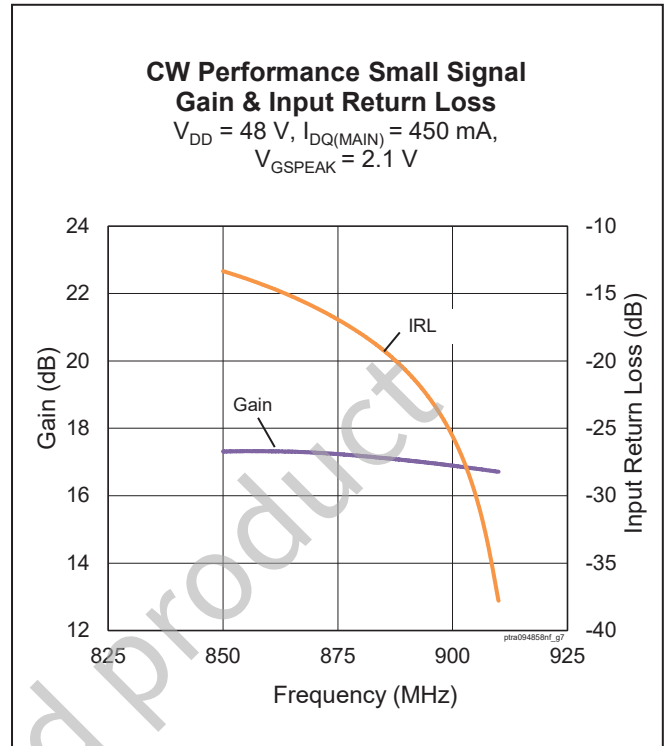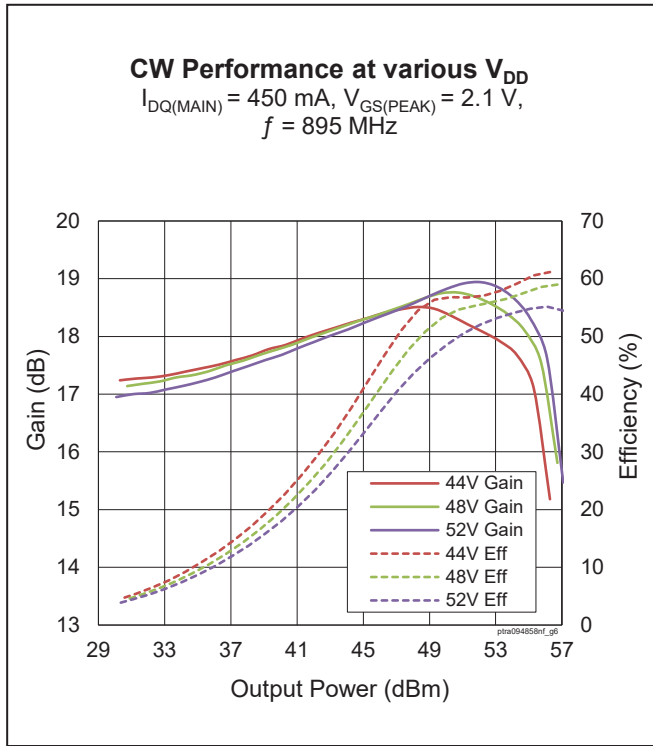

discontinued Product

Load Pull Performance

Main Side Load Pull Performance – Pulsed CW signal: 10 μsec, 10% duty cycle, $V_{DD} = 48\text{ V}$, $I_{DQ} = 450\text{ mA}$, class AB

| | | P _{1dB} | | | | | | | | | |
|------------|--------------------|--------------------|-----------|------------------------|----------------------|--------------------|----------------------|-----------|------------------------|----------------------|--------------------|
| | | Max Output Power | | | | | Max Drain Efficiency | | | | |
| Freq [MHz] | Z _s [Ω] | Z _l [Ω] | Gain [dB] | P _{1dB} [dBm] | P _{1dB} [W] | η _D [%] | Z _l [Ω] | Gain [dB] | P _{1dB} [dBm] | P _{1dB} [W] | η _D [%] |
| 865 | 1.43 – j5.04 | 2.29 – j0.67 | 21.06 | 53.32 | 214.78 | 54.9 | 4.77 + j1.31 | 22.83 | 51.65 | 146.22 | 66.0 |
| 895 | 2.31 – j6.58 | 2.26 – j0.24 | 21.03 | 53.47 | 222.33 | 57.0 | 4.26 + j1.68 | 22.7 | 51.84 | 152.76 | 68.1 |


| | | P _{3dB} | | | | | | | | | |
|------------|--------------------|--------------------|-----------|------------------------|----------------------|--------------------|----------------------|-----------|------------------------|----------------------|--------------------|
| | | Max Output Power | | | | | Max Drain Efficiency | | | | |
| Freq [MHz] | Z _s [Ω] | Z _l [Ω] | Gain [dB] | P _{3dB} [dBm] | P _{3dB} [W] | η _D [%] | Z _l [Ω] | Gain [dB] | P _{3dB} [dBm] | P _{3dB} [W] | η _D [%] |
| 865 | 1.43 – j5.04 | 2.32 – j0.79 | 19.07 | 54.24 | 265.46 | 58.5 | 4.68 + j1.09 | 20.78 | 52.59 | 181.55 | 67.3 |
| 895 | 2.31 – j6.58 | 2.29 – j0.32 | 19.03 | 54.35 | 272.27 | 60.4 | 4.14 + j1.5 | 20.64 | 52.77 | 189.23 | 69.3 |

Peak Side Load Pull Performance – Pulsed CW signal: 10 μsec, 10% duty cycle, $V_{DD} = 48\text{ V}$, $V_{GS(PEAK)} = 2.1\text{ V}$, class C

| | | P _{1dB} | | | | | | | | | |
|------------|--------------------|--------------------|-----------|------------------------|----------------------|--------------------|----------------------|-----------|------------------------|----------------------|--------------------|
| | | Max Output Power | | | | | Max Drain Efficiency | | | | |
| Freq [MHz] | Z _s [Ω] | Z _l [Ω] | Gain [dB] | P _{1dB} [dBm] | P _{1dB} [W] | η _D [%] | Z _l [Ω] | Gain [dB] | P _{1dB} [dBm] | P _{1dB} [W] | η _D [%] |
| 865 | 1.78 – j4.94 | 1.20 – j0.29 | 16.83 | 55.60 | 363.08 | 57.9 | 0.97 + j1.36 | 17.44 | 52.28 | 169.04 | 74.5 |
| 895 | 2.94 – j6.74 | 1.34 – j0.19 | 16.54 | 55.65 | 367.28 | 58.9 | 0.98 + j1.35 | 17.24 | 52.81 | 191 | 74.2 |

| | | P _{3dB} | | | | | | | | | |
|------------|--------------------|--------------------|-----------|------------------------|----------------------|--------------------|----------------------|-----------|------------------------|----------------------|--------------------|
| | | Max Output Power | | | | | Max Drain Efficiency | | | | |
| Freq [MHz] | Z _s [Ω] | Z _l [Ω] | Gain [dB] | P _{3dB} [dBm] | P _{3dB} [W] | η _D [%] | Z _l [Ω] | Gain [dB] | P _{3dB} [dBm] | P _{3dB} [W] | η _D [%] |
| 865 | 1.78 – j4.94 | 1.36 – j0.19 | 15.03 | 56.38 | 434.51 | 63.4 | 1.17 + j0.98 | 15.72 | 54.31 | 269.77 | 72.5 |
| 895 | 2.94 – j6.74 | 1.36 – j0.19 | 14.54 | 56.45 | 441.57 | 61.2 | 1.15 + j1 | 15.54 | 54.69 | 294.44 | 74.0 |

Reference Circuit, 865 – 895 MHz

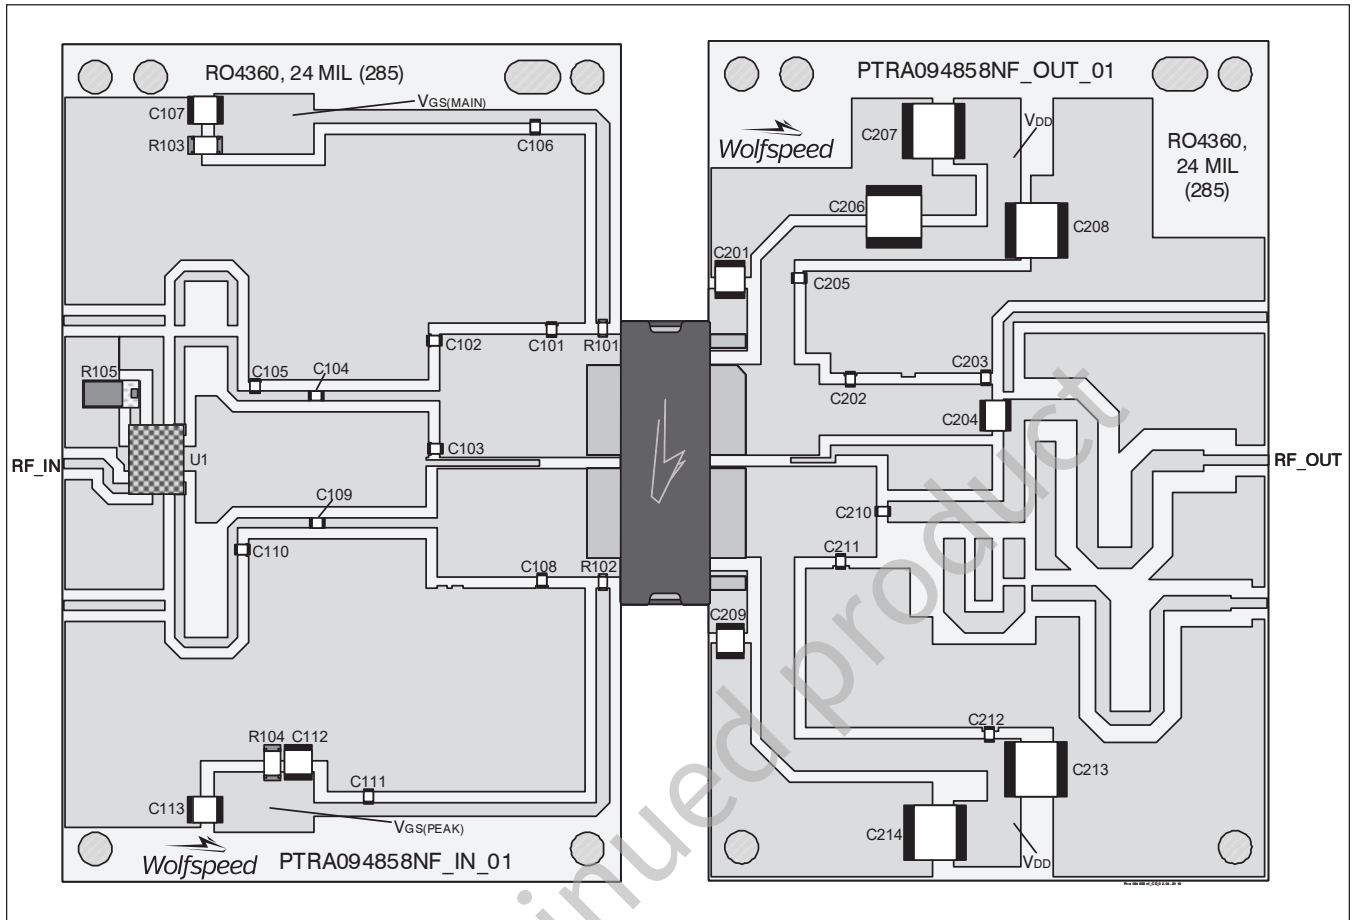

Reference circuit assembly diagram (not to scale)


Reference Circuit Assembly

| | |
|---|---|
| DUT | PTRA094858NF V1 |
| Test Fixture Part No. | LTA/PTRA094858NF-V1 |
| PCB | Rogers 4360, 0.024" thick, 2 oz. copper, $\epsilon_r = 6.4$, $f = 865 - 895$ MHz |
| Find Gerber files for this test fixture on the Wolfspeed Web site at www.wolfspeed.com/RF | |

Components Information


| Component | Description | Manufacturer | P/N |
|------------------------------|------------------------------|----------------------------------|---------------------|
| Input | | | |
| C101, C108 | Capacitor, 6.8 pF | ATC | ATC600F6R8CT250XT |
| C102 | Capacitor, 2.7 pF | ATC | ATC600F2R7CT250XT |
| C103, C105 | Capacitor, 1.8 pF | ATC | ATC600F1R8CT250XT |
| C104, C109 | Capacitor, 33 pF | ATC | ATC600F330JT250XT |
| C106, C111 | Capacitor, 68 pF | ATC | ATC600F680JT250XT |
| C107, C112, C113 | Capacitor, 10 μ F, 50 V | Murata Electronics North America | GRM31CR61H106KA12K |
| C110 | Capacitor, 3 pF | ATC | ATC600F3R0CT250XT |
| R101, R102 | Resistor, 5.6 ohms | Panasonic Electronic Components | ERJ-8RQJ5R6V |
| R103, R104 | Resistor, 1000 ohms | Panasonic Electronic Components | ERJ-8GEYJ102V |
| R105 | Resistor, 50 ohms | Richardson | C16A50Z4 |
| U1 | Hybrid Coupler | RN2 Tech | RN2 CMX09Q02 |
| Output | | | |
| C201, C209 | Capacitor, 10 μ F, 100 V | TDK Corporation | C5750X7S2A106M230KB |
| C202 | Capacitor, 10 pF | ATC | ATC600F100JT250XT |
| C203 | Capacitor, 3.3 pF | ATC | ATC600F3R3CT250XT |
| C204 | Capacitor, 20 pF | ATC | ATC100B200KW500XT |
| C205 | Capacitor, 68 pF | ATC | ATC600F680JT250XT |
| C206, C207, C208, C213, C214 | Capacitor, 10 μ F, 100 V | TDK Corporation | C5750X7S2A106M230KB |
| C210, C212 | Capacitor, 47 pF | ATC | ATC600F470JT250XT |
| C211 | Capacitor, 15 pF | ATC | ATC600F150JT250XT |

Pinout Diagram (top view)

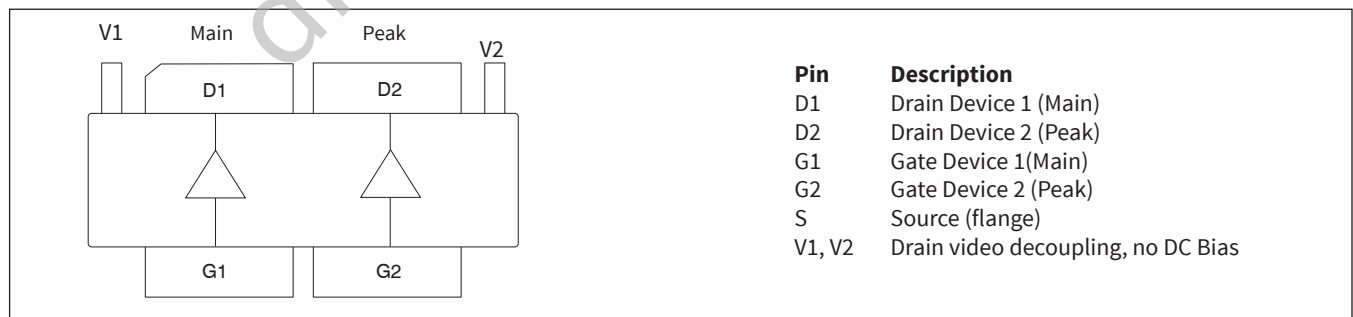

Lead connections for PTRA094858NF

Package Outline Specifications

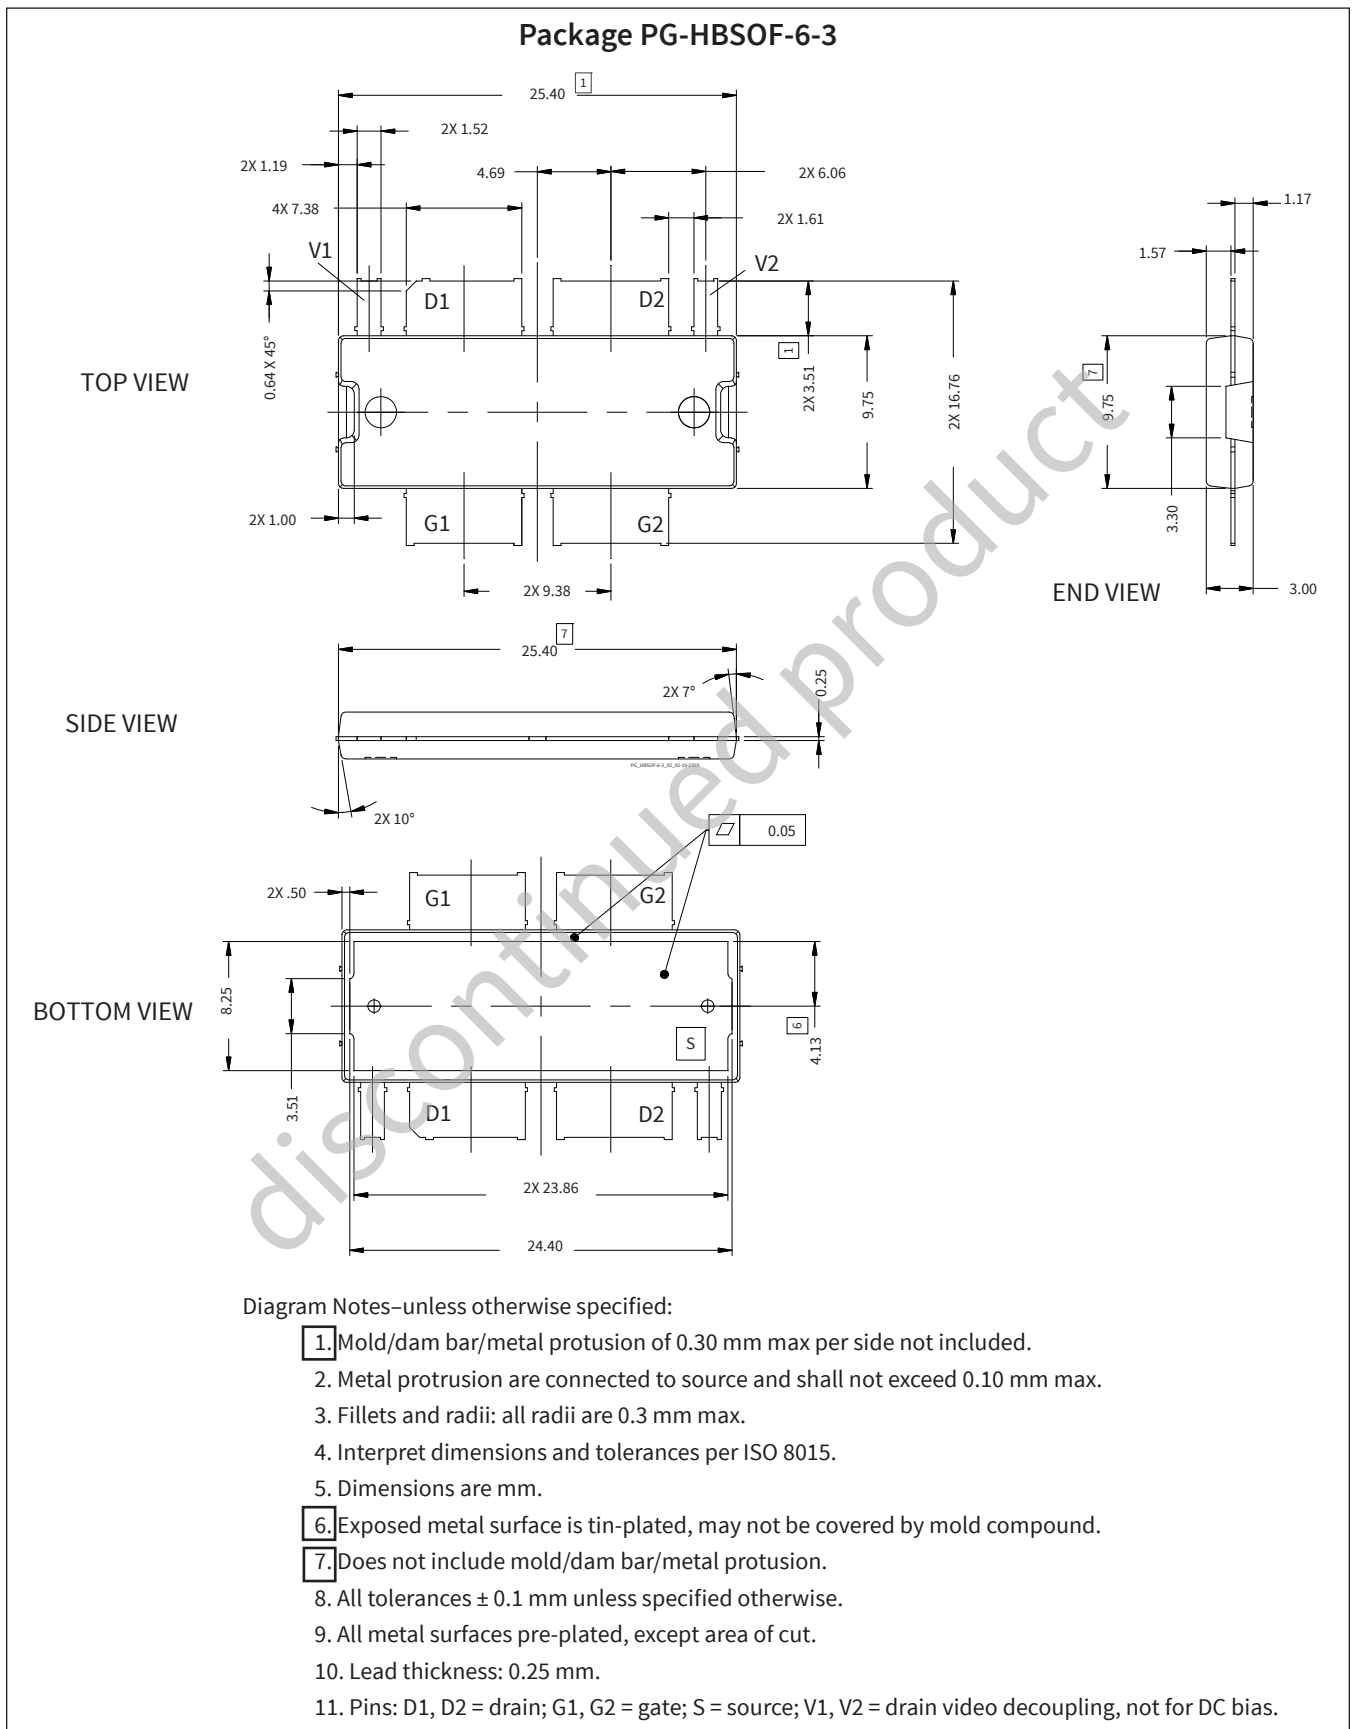

**For more information, please contact:**

4600 Silicon Drive
Durham, NC 27703 USA
Tel: +1.919.313.5300
www.wolfsspeed.com/RF

Sales Contact
RFSales@wolfsspeed.com

RF Product Marketing Contact
RFMarketing@wolfsspeed.com

discontinued product

Notes & Disclaimer

Specifications are subject to change without notice. “Typical” parameters are the average values expected by Wolfsspeed in large quantities and are provided for information purposes only. Wolfsspeed products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death. No responsibility is assumed by Wolfsspeed for any infringement of patents or other rights of third parties which may result from use of the information contained herein. No license is granted by implication or otherwise under any patent or patent rights of Wolfsspeed.

© 2023 Wolfsspeed, Inc. All rights reserved. Wolfsspeed® and the Wolfstreak logo are registered trademarks and the Wolfsspeed logo is a trademark of Wolfsspeed, Inc.
PATENT: <https://www.wolfsspeed.com/legal/patents>

The information in this document is subject to change without notice.