

Product data sheet

Specifications



safety module, Harmony XPS, zero speed monitoring with time delay, 48 to 240V AC or DC, screw

XPSUVN31AP

Main

| | |
|-------------------------------|--|
| Range of product | Harmony Safety Automation |
| Product or component type | Safety module |
| Safety module name | XPSUVN |
| Safety module application | For zero speed detection |
| Function of module | Monitoring 3-phase motor Monitoring 3-phase motor with star-delta starting Monitoring 3-phase motor with variable number of poles Monitoring 3-phase motor with variable number of poles and star-delta starting Monitoring dc motor Monitoring servo motor Monitoring 3-phase motor supplied by variable speed drive Monitoring 3-phase motor supplied by servo drive Controlling enegization to open of guard switch type XCSE, XCSLE, XCSLF, XCST |
| Safety level | Can reach PL e/category 3 for normally open relay contact ISO 13849-1 Can reach SILCL 3 for normally open relay contact IEC 62061 Can reach SIL 3 for normally open relay contact IEC 61508 |
| Safety reliability data | MTTFd > 30 years ISO 13849-1 Dcavg = 98.9 % ISO 13849-1 PFHd = 2.44E-9 1/h ISO 13849-1 HFT = 1 IEC 62061 PFHd = 2.44E-9 1/h IEC 62061 SFF > 99% IEC 62061 HFT = 1 IEC 61508-1 PFHd = 2.44E-9 1/h IEC 61508-1 SFF > 99% IEC 61508-1 Type = B IEC 61508-1 |
| Product certifications | TÜV cULus |
| [Us] rated supply voltage | 48...240 V AC/DC - 10...10 % |
| Output type | Relay, 1 NO, volt-free |
| Number of additional circuits | 2 solid state outputs |

Complementary

| | |
|---------------------------|---|
| Power consumption in W | 2.5 W |
| Power consumption in VA | 5.5 VA |
| Input voltage | 690 V |
| Input detection threshold | 50 mV 65 mV 85 mV 110 mV 140 mV 180 mV 230 mV 300 mV 400 mV |

| | |
|---|---|
| | 500 mV |
| Time delay | 0.5 s 1 s 2 s 3 s 5 s 8 s 12 s 20 s 35 s 60 s |
| [Ie] rated operational current | 5 A AC-1 for normally open relay contact 3 A AC-15 for normally open relay contact 5 A DC-1 for normally open relay contact 3 A DC-13 for normally open relay contact |
| [Ith] conventional free air thermal current | 6 A NO relay output circuit |
| Associated fuse rating | 6 A gG relay output IEC 60947-1 |
| Standards | IEC 60947-5-1 IEC 61508-1 functional safety standard IEC 61508-2 functional safety standard IEC 61508-3 functional safety standard IEC 61508-4 functional safety standard IEC 61508-5 functional safety standard IEC 61508-6 functional safety standard IEC 61508-7 functional safety standard ISO 13849-1 functional safety standard IEC 62061 functional safety standard |
| Minimum output current | 10 mA relay output |
| Minimum output voltage | 5 V relay output |
| [Ui] rated insulation voltage | 690 V phase to phase 2)EN/IEC 60947-1 400 V phase to earth 2)EN/IEC 60947-1 |
| [Uimp] rated impulse withstand voltage | 4 kV II EN/IEC 60947-1 |
| Local signalling | LED green power power ON LED red error error LED yellow state status LED yellow L12 input line comparison LED yellow L32 input line comparison |
| Connections - terminals | Removable screw terminal block solid or flexible 0.2...2.5 mm² Removable screw terminal block flexible with ferrule 0.25...2.5 mm² single conductor Removable screw terminal block solid or flexible 0.2...1.5 mm² twin conductor Removable screw terminal block flexible with ferrule 2 x 0.25...1 mm² without cable end, with bezel Removable screw terminal block flexible with ferrule 2 x 0.5...1.5 mm² with cable end, with bezel |
| Mounting support | 35 mm symmetrical DIN rail |
| Depth | 4.72 in (120 mm) |
| Height | 3.94 in (100 mm) |
| Width | 0.89 in (22.5 mm) |
| Net weight | 0.44 lb(US) (0.2 kg) |
| Environment | |
| IP degree of protection | IP20 terminals)EN/IEC 60529 IP40 housing)EN/IEC 60529 IP54 mounting area)EN/IEC 60529 |
| Ambient air temperature for operation | -13...131 °F (-25...55 °C) |
| Ambient air temperature for storage | -40...158 °F (-40...70 °C) |
| Relative humidity | 5...95 % non-condensing |
| Packing Units | |
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |


| | |
|------------------------------|-------------------------|
| Package 1 Height | 2.56 in (6.5 cm) |
| Package 1 Width | 5.31 in (13.5 cm) |
| Package 1 Length | 6.10 in (15.5 cm) |
| Package 1 Weight | 9.59 oz (272.0 g) |
| Unit Type of Package 2 | S03 |
| Number of Units in Package 2 | 16 |
| Package 2 Height | 11.81 in (30 cm) |
| Package 2 Width | 11.81 in (30 cm) |
| Package 2 Length | 15.75 in (40 cm) |
| Package 2 Weight | 11.19 lb(US) (5.075 kg) |

Offer Sustainability








| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS declaration |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End of Life Information |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

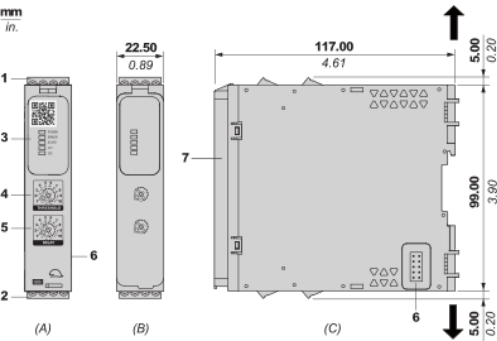Dimensions


Front and Side Views



- (A) : Product drawing
- (B) : Screw clamp terminal
- (C) : Side view
- (1) : Removable terminal blocks, top
- (2) : Removable terminal blocks, bottom
- (3) : LED indicators
- (4) : Voltage threshold selector
- (5) : Activation delay selector
- (6) : Connector for optional output extension module XPSUEP (lateral)
- (7) : Sealable transparent cover


| | | | | | | |
|---|----------------------|---|---|---|---|---|
| mm in. | 7.0–8.0 0.28–0.31 |  |  |  |  |  |
| mm ² | 0,2... 2,5 | 0,25...2,5 | 0,2...1,5 | 0,25...1 | 0,5...1,5 | |
| AWG | 24... 12 | 24...12 | 24...16 | 24...18 | 20...16 | |
|  Ø 3,5 mm (0.14 in) | |  | | Nm | 0.5... 0.6 | |
| | | | | lb-in | 4,4... 5,3 | |

Mounting to DIN rail

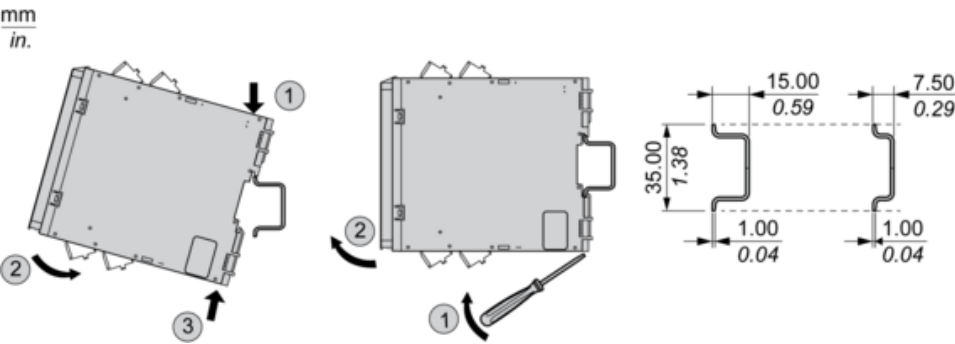


Screw-mounting

mm
in.

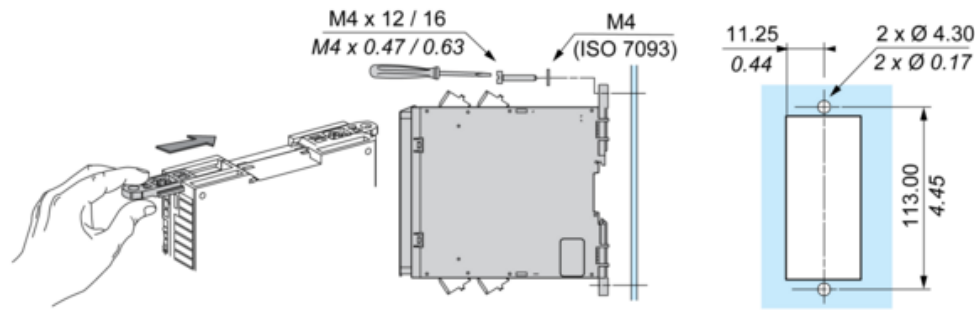

Wiring Diagram

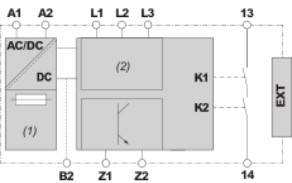

- (1) : A1-A2 (Power supply)
- (2) : L1-L2-L3 (Input channels of safety-related analog input)
- 13-14 : Terminals of the safety-related outputs
- B2 : Terminal for common reference potential for 24 Vdc signals. The power supplies of the connected equipment must have a common reference potential to be connected to this terminal. In the case of XPSUVN31A•, terminal B2 must be grounded. In the case of XPSUVN11A•, the safety module is already grounded via the PELV power supply unit connected to terminals A1 and A2.
- Z1 : Pulsed output for diagnostics, not safety-related
- Z2 : Solid state output, not safety-related
- EXIT : Connector for output extension module XPSUEP

Recommended replacement(s)