



# 38x38x28mm

- **Airflow:** 13.73~20.86 CFM
- **Static Pressure:** 37.13~77.26 mm-H<sub>2</sub>O
- **Blade / Housing:**  
Plastic Material UL 94V-0 P.B.T.
- **Lead Wire:** UL1061 #28 AWG
- **Weight:** 47.0g

DC AXIAL FAN

DC BLOWER

XTREME SERIES

AC AXIAL FAN

Model No.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level
		VDC	VDC	RPM	CFM	mm-H <sub>2</sub> O	mA	W	Hour		dB(A)
XYW03828012BM	2B	12	7~13.2	17000	13.73	37.13	300	3.60	80000	5	46.5
XYW03828012BH	2B		7~13.2	19000	15.77	46.27	400	4.80	75000	4	48.0
XYW03828012BS	2B		7~13.2	21000	17.53	59.41	500	6.00	65000	3	53.0
XYW03828012BSS	2B		7~13.2	23500	19.49	65.37	700	8.40	65000	2	56.0
XYW03828012BF	2B		7~13.2	25000	20.86	77.26	850	10.20	65000	1	57.5

2B: 2-ball bearing L: sintetico bearing S: sleeve bearing

**Voltage Available**

05 12 24 48


**Bearing System Available**

2B L S


**Function Available**

1 6 5 4 3 2 7 8 9 10 11 12 13 14

**PERFORMANCE P-Q CURVE**

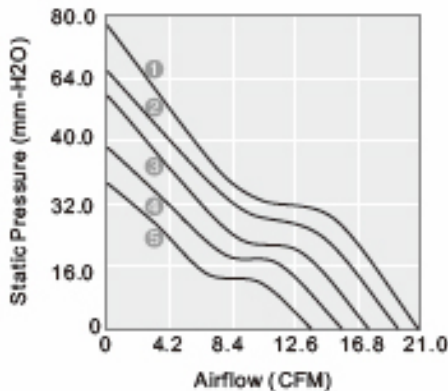

**OUTLINE DIMENSIONS**

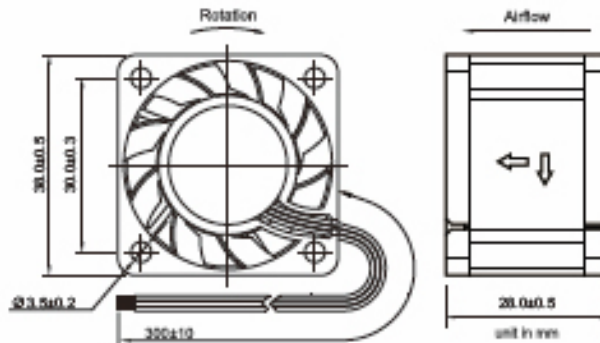

Please refer to *Model Numbering System* for bearing, function and speed level indication. Specifications are subject to changes without notice. Please refer to the formally issued product specification via contacting Y.S. TECH sales department. Visit Y.S. TECH web site at <http://www.ystechusa.com/> for updated information. Customized Specifications are designed accordingly.