

	TABLE 1						
	STACK HEIGHT						
	APF6 LEAD	APM6 LEAD STYLE					
	STYLE	-01.5	-06.5				
	-03.5	5.00 [0.197]	10.00 [0.394]				

FIG 1 APF6-030-03.5-XXX-04-X SHOWN (SOME CENTER FEATURES REMOVED FOR CLARITY)

NOTES:

-04

-06

-08

-10

-16

1. TAPE & REEL IS STANDARD PACKAGING.

9.00 [0.354] 6.80 [0.268]

13.60 [0.535] 11.40 [0.449]

18.20 [0.717] 16.00 [0.630]

22.80 [0.898] 20.60 [0.811]

36.60 [1.441] 34.40 [1.354]

- 2. NOTE DELETED.
- 3. ATTACH LABEL-4X2 TO EACH TAPE & REEL PACKAGE.
- 4. K-DOT PROVIDED AS STANDARD.
- 5. MEASURE BOTH OUTSIDE ROWS ONLY.
- 6. SEE SHEET 3 FOR PROCESSING INFORMATION. 7. ORDERS WILL BE PACKAGED ACCORDING TO THE SAMTEC PACKAGING EFFICIENCY STANDARDS (SPES) FOUND ON WWW.SAMTEC.COM

PROPRIETARY NOTE THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING REPRODUCTION LISE PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY

PHONE: 812-944-6733 OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS

No OF POS

PER ROW -010

-020

-030 -040

-050

-060

-070

-080

-090

-100

DO NOT SCALE DRAWING

SHEET SCALE: 4:1 INSULATOR: LCP, UL 94 V-0; COLOR: BLACK

CONTACT: COPPER ALLOY

WRITTEN CONSENT OF SAMTEC INC

DESCRIPTION

APF6 0.635MM SOCKET ARRAY ASSEMBLY

DWG. NO

APF6-XXX-XX.X-XXX-XX-XX-XR BY: B BLESSING 5/26/2018 | SHEET 1 OF 6

520 PARK EAST BLVD, NEW ALBANY, IN 47150

TAPE & REEL

OPTION

(SEE NOTES 3 & 7)

-FR: FULL QTY TAPE AND REEL

-TR: TAPE & REEL

BLANK: NO ALIGNMENT PIN
-A: ALIGNMENT PIN (SEE SHT 5, FIG 3)

-L: SQUEEZE LATCH (SEE SHT 3, FIG 5,

NOT AVAILABLE WITH -A OPTION,

ONLY AVAILABLE IN -025 & -037 POS WITH -04 & -06 ROW) -T: TH LOCKING TOOL (SEE SHT 3, FIG 6,

NOT AVAILABLE WITH -A OPTION,

WITH -04, -06 & -08 ROW)

WITH -08 ROW) SOLDERBALL COMPOSITION

*-1: 63.0% TIN/37.0% LEAD

(PACKAGING: TAPE & REEL, SEE NOTES 1, 2 & 3)

(🗵 = ONLY AVAILABLE IN -025, -037 & -100 POS) $\triangle = ONLY AVAILABLE IN -L, -T & -TS OPTION)$

**-0: NO SOLDER BALL

 $\Box = ONLY AVAILABLE IN -50 POS$

* = NOT TOOLED)

(** = NOT RELEASED)

ONLY AVAILABLE IN -025 & -037 POS

**-TS: SM LOCKING TOOL (SÉE SHT 4, FIG 7,

-2: 95.5% TIN/3.8% SILVER/0.7% COPPER

TABLE 2

11.47 [0.451] 9

"A"

"B"

17.82 [0.701] 19 12.07 [0.475]

24.17 [0.951] 29 18.42 [0.725]

30.52 [1.201] 39 24.77 [0.975]

36.87 [1.451] 49 31.12 [1.225]

43.22 [1.701] 59 37.47 [1.475]

49.57 [1.951] 69 43.82 [1.725]

55.92 [2.201] 79 | 50.17 [1.975]

62.27 [2.451] 89 56.52 [2.225]

68.62 [2.701] 99 62.87 [2.475]


"C"

5.72 [0.225]

NOT AVAILABLE WITH -A OPTION.

ONLY AVAILABLE IN -025 & -037 POS

FAX: 812-948-5047 e-Mail info@SAMTEC.com

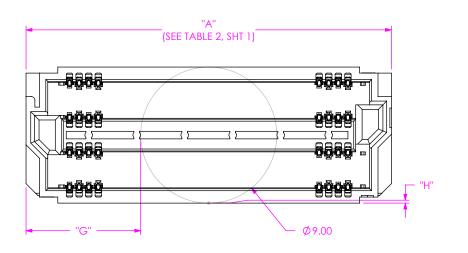

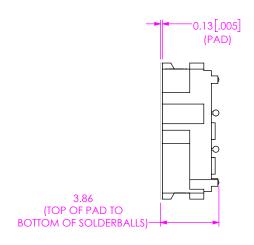


FIG 2
POLYIMIDE PAD
APF6-030-03.5-XXX-04-X SHOWN
(SOME CENTER FEATURES REMOVED FOR CLARITY)

TABLE 5													
N- OF	"G"												
-No. OF ROWS	-010	-020	-025	-030	-037	-040	-050	-060	-070	-080	-090	-100	"H"
-04													0.00 [0.000]
-06													2.30 [0.091]
-08	1.23 [0.049]	4.41 [0.174]	6.70 [0.264]	7.58 [0.299]	10.51 [0.414]	10.76 [0.424]	13.93 [0.549]	17.11 [0.674]	20.28 [0.799]	23.46 [0.924]	26.63 [1.049]	29.81 [1.174]	4.60 [0.181]
-10													6.90 [0.272]
-16													13.80 [0.543]



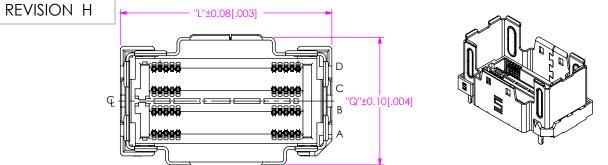


TABLE 9							
No OF POS	"L"	"M"	"N"	"P"	"U"		
-025	22.39 [.881]	24	15.24 [.600]	17.59 [.693]	21.18 [.834]		
-037	30.01 [1.181]	36	22.86 [.900]	25.21 [.993]	28.80 [1.134]		

TABLE 10							
-No. OF ROWS	"Q"	"R"	"S"				
-04	13.50 [.531]	9.90 [.390]	11.60 [.457]				
-06	18.10 [.713]	14.50 [.571]	16.20 [.638]				
-08 (AVAILABLE FOR -T OPTION ONLY)	N/A	19.10 [.752]	20.80 [.819]				



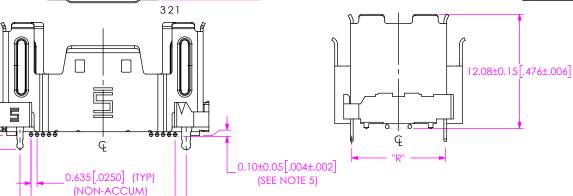



FIG 5
-L: SQUEEZE LATCH
APF6-025-03.5-XXX-04-X-L SHOWN
(SAME AS FIG 1, EXCEPT AS SHOWN)
(SOME CENTER FEATURES REMOVED FOR CLARITY)

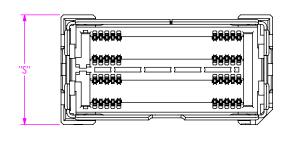

"M" EQ. SPCS @ 0.635 [.0250]= "N"

1.46±0.10[.057±.004]








FIG 6 -T: LOCKING TOOL APF6-025-03.5-XXX-04-X-T SHOWN (SAME AS FIG 1 & FIG5, EXCEPT AS SHOWN) (SOME CENTER FEATURES REMOVED FOR CLARITY)

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR MORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WAITTEN CONSENT OF SAMTEC, IN



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

SHEET SCALE: 5:2


DESCRIPTION:


APF6 0.635MM SOCKET ARRAY ASSEMBLY


WG NO

APF6-XXX-XX.X-XXX-XXX-XX-XX-XX-XR
BY: B BLESSING 5/26/2018 SHEET 3 OF 6

c:\enterprisevault\DWG\MISC\MKTG\APF6-XXX-XXX-XXX-XXX-XX-XX-XX-XX-MKT.SLDDRW

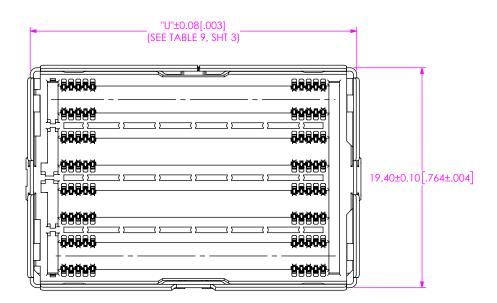

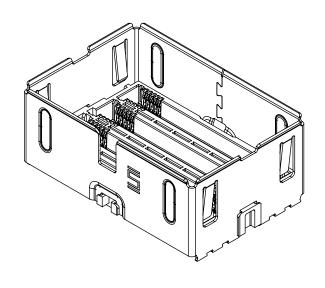

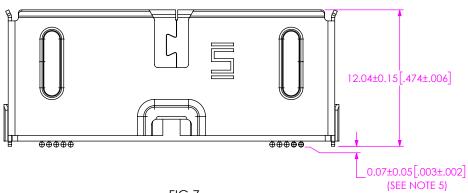

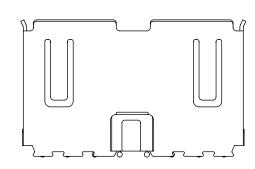


FIG 7
-TS: SM LOCKING TOOL
APF6-037-03.5-XXX-08-X-TS SHOWN
(SAME AS FIG 1 & FIG 5, EXCEPT AS SHOWN)
(SOME CENTER FEATURES REMOVED FOR CLARITY)

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIA. AND PROPRIETARY INFORMATION AND ALL DESIGN. MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE DENESSY RESERVED ST SAMEC, INC. THIS DOCUMENT SHALL NOT BE DECLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON DE ENTITY NOR REPRODUCED, TRANSFERRED ON RICOPROPARTED IN ANY OTHER PROJECT IN ANY MANURE WITHOUT THE EXPRESS WRITTER CONSENT OF SAMEC, INC.



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322


SHEET SCALE: 4:1 DESC


APF6 0.635MM SOCKET ARRAY ASSEMBLY

VG NO

APF6-XXX-XX.X-XXX-XX-XX-XR

BY: B BLESSING 5/26/2018 SHEET 4 OF 6

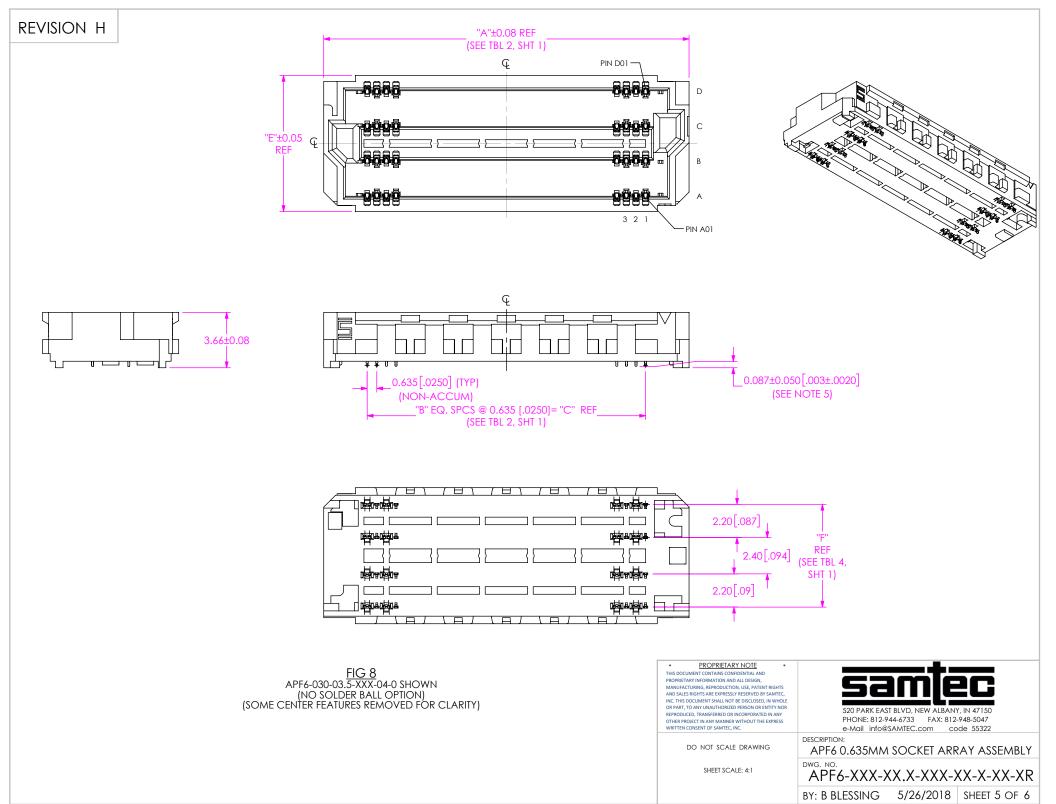

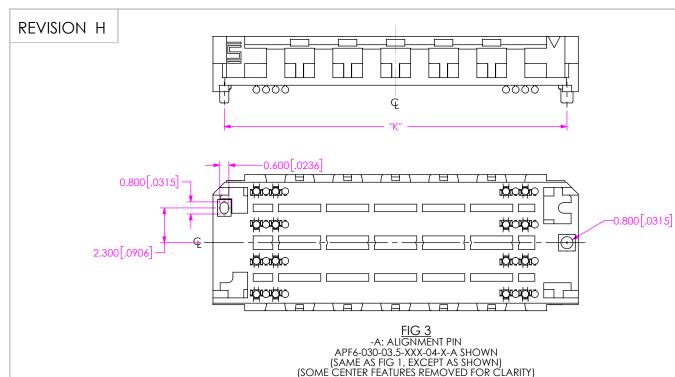




TABLE 7					
No OF POS	"K"				
PER ROW	K				
-010	9.97 [0.392]				
-020	16.32 [0.642]				
-030	22.67 [0.892]				
-040	29.02 [1.142]				
-050	35.37 [1.392]				
-060	41.72 [1.642]				
-070	48.07 [1.892]				
-080	54.42 [2.142]				
-090	60.77 [2.392]				
-100	67.12 [2.642]				

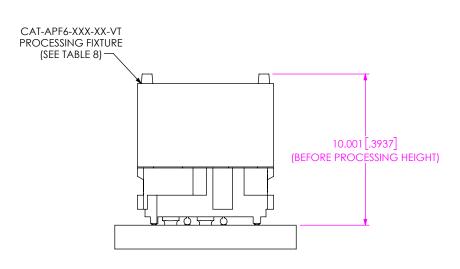


FIG 4 APF6-100-03.5-XXX-XX-X PROCESSING VIEW (CAT-APF6-XXX-XX-VT)

TABLE 8						
APF6 FIXTURE TOOLS						
PART NUMBER POSITIONS ROW						
CAT-APF6-100-04-VT	-100	-04				
CAT-APF6-100-08-VT -100 -08						

NOTE:

FIG 4 DIMENSION 10.001 (TOP OF PCB TO TOP OF PROCESSING FIXTURE) INDICATES CONNECTOR/FIXTURE HEIGHT ON PCB TO GUARANTEE ENOUGH REFLOW OVEN WORKING SPACE, DIMENSION 10.001, PCB THINKNESS AND THE HEIGHT OF THE COMPONENTS ON THE OTHER SIDE OF THE BOARD NEED TO BE CONSIDERED.

