## SIEMENS

## Data sheet

## 3RT2926-3AP31



Latching block, mechanical, 230 V AC/DC for motor contactors, Size S0

General technical data		
product brand name		SIRIUS
product designation		mechanical latch
size of contactor		S0
protection class IP on the front		IP20
insulation voltage with degree of pollution 3 at AC rated value	V	300
power loss [V·A] of magnet coil at AC typical	V·A	4
power loss [W] of magnet coil at DC typical	W	4
pulse duration for switching off		
• at AC	ms	18 31
• at DC	ms	18 26
ambient temperature		
<ul> <li>during storage</li> </ul>	°C	-50 +80
<ul> <li>during operation</li> </ul>	°C	-25 +60
Auxiliary circuit		
number of NC contacts		
<ul> <li>for auxiliary contacts instantaneous contact</li> </ul>		0
<ul> <li>for auxiliary contacts lagging switching</li> </ul>		0
<ul> <li>for auxiliary contacts</li> </ul>		0
number of NO contacts		
<ul> <li>for auxiliary contacts instantaneous contact</li> </ul>		0
<ul> <li>for auxiliary contacts leading contact</li> </ul>		0
<ul> <li>for auxiliary contacts</li> </ul>		0
Control circuit/ Control		
type of voltage of the control supply voltage		AC/DC
control supply voltage frequency		
• 1 rated value	Hz	50
2 rated value	Hz	60
control supply voltage 1		
<ul> <li>at DC rated value</li> </ul>	V	230
• at AC		
— at 50 Hz rated value	V	230
— at 60 Hz rated value	V	230
operating range factor control supply voltage rated value of magnet coil		0.85 1.1
• at AC at 50 Hz		0.85 1.1
• at AC at 60 Hz		0.85 1.1

• at DC				0.85 1.1					
Installation/ mounting/ d	imensions								
fastening method				clip-on					
mounting position			any						
width			mm	22					
height		mm	48.4						
depth			mm	84.3					
Connections/ Terminals									
type of electrical connection for auxiliary and control circuit				screw-type terminals					
type of connectable co	nductor cross-sec	tions							
<ul> <li>for auxiliary contact</li> </ul>	cts								
— solid			2x (0.5 2.5 mm²), 1x 4 mm²						
<ul> <li>finely strande</li> </ul>	ed								
<ul> <li>— with core end processing</li> </ul>			2x (0.5 2.5 mm²), 1x 2.5 mm²						
<ul> <li>at AWG cables for auxiliary contacts</li> </ul>			2x 14, 1x 12						
Certificates/ approvals									
certificate of suitability			CE / UL / CSA / CCC						
General Product Approval		EMC	Declaration of Conformity		ormity				
State	(U) UL	EHC		RCM	CE EG-Konf.	<u>Miscellaneous</u>			
Test Certificates		other			Railway				
<u>Type Test</u> <u>Certificates/Test</u> <u>Report</u>	<u>Special Test</u> <u>Certificate</u>	<u>Confirmatic</u>	<u>in</u>	VDE	Vibration and Shock				

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2926-3AP31


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2926-3AP31

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2926-3AP31

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2926-3AP31&lang=en

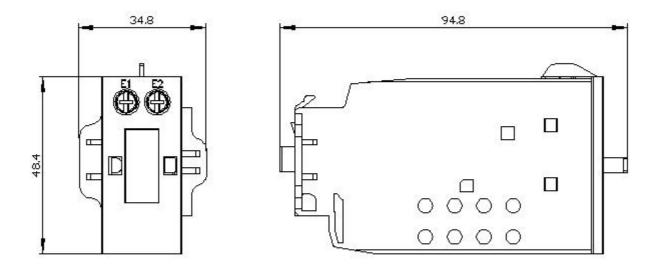

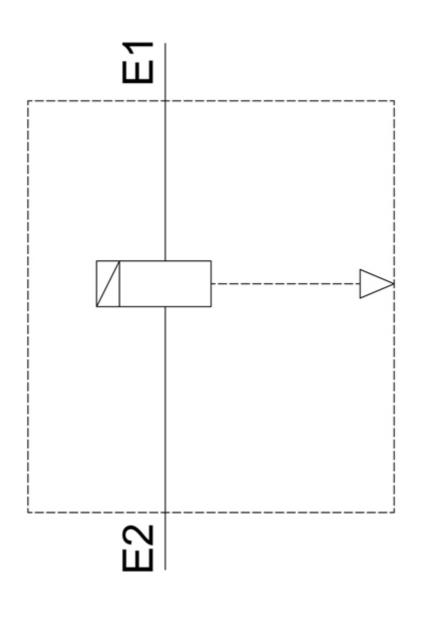

last modified:

5/15/2020 🖸