

DESIGNED AND DIMENSIONED IN MILLIMETERS[INCHES]  
ALL DIMENSIONS REFERENCE EXCEPT AS SHOWN

BE40C-XXXX-X-XX-XXXX

**THIS PRODUCT MANUFACTURED WITH LEAD-FREE PROCESSING**

DO NOT SCALE FROM THIS PRINT

TABLE 3			
END OPTION	HI POT		PROTECTIVE CAP COLOR
	"DC"	"AC"	
-92SP	1000	1000	YELLOW
-92SJ	1000	1000	YELLOW
-24SP	1000	1000	GREEN
-24SJ	1000	1000	GREEN

END 2 CONNECTOR  
(SEE TABLE 1)

OVERALL ASSEMBLY LENGTH (OAL)  
XXXX (MILLIMETERS)  
(0.152 MIN)  
(SEE NOTE 7)

PHASE MATCHING SPEC (RANGE)  
-2: 2 PICO-SECOND  
-5: 5 PICO-SECONDS  
-N: NO PHASE MATCHING

No. OF PHASE MATCHED CABLES  
\*-01: (1 CABLE FOR THIS PART NUMBER)  
\*\*-02: (2 CABLES FOR THIS PART NUMBER)  
\*\*-04: (4 CABLES FOR THIS PART NUMBER)  
\*\*-06: (6 CABLES FOR THIS PART NUMBER)  
\*\*-08: (8 CABLES FOR THIS PART NUMBER)  
(\* = ONLY AVAILABLE WITH -N OPTION)  
(\*\* = NOT AVAILABLE WITH -N OPTION)

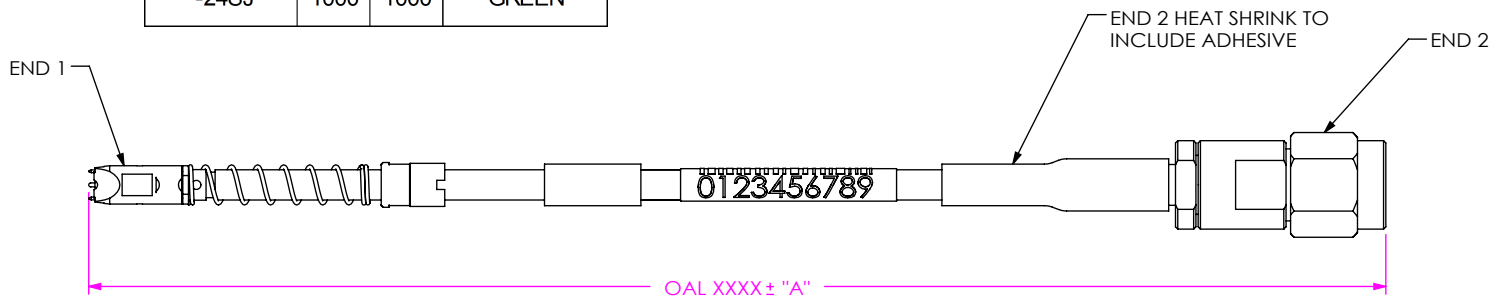


FIG 1  
BE40C-XXXX-X-02-XXXX SHOWN  
(PROTECTIVE CAPS NOT SHOWN FOR CLARITY)

TABLE 2	
OVERALL LENGTH	"A"
0152-0200 [5.98-7.87]	+3.0 [.12] / -0.0 [.00]
0201-0500 [7.91-19.69]	+5.0 [.20] / -0.0 [.00]
0501-9999 [19.72-39.37]	+10.0 [.39] / -0.0 [.00]

END OPTION	SERIES	GENDER	CONFIGURATION	PLATING			FIGURE
				CENTER CONTACT	GROUND CONTACTS	CABLE BODY	
-92SP	2.92 MM	PLUG	STRAIGHT	30µ" GOLD	STAINLESS STEEL	2µ" GOLD	SHT 2, FIG 2
-92SJ	2.92 MM	JACK	STRAIGHT	30µ" GOLD	STAINLESS STEEL	2µ" GOLD	SHT 2, FIG 3
-24SP	2.4 MM	PLUG	STRAIGHT	30µ" GOLD	STAINLESS STEEL	2µ" GOLD	SHT 2, FIG 4
-24SJ	2.4 MM	JACK	STRAIGHT	30µ" GOLD	STAINLESS STEEL	2µ" GOLD	SHT 2, FIG 5

NOTES:

- DELETED.
- DELETED.
- FERRULE, SPRING AND HEAT SHRINK ARE FREE FLOATING AND ARE NOT STATIONARY.
- CABLE ASSEMBLY TO HAVE PROTECTIVE CAP ASSEMBLED ON EACH END AND TO BE PACKAGED IN PHASE MATCHED GROUPS IN ESD BAG.
- DELETED.
- MAXIMUM RETURN LOSS FOR 92SP/92SJ: -13.97dB, DC TO 40 GHz.  
MAXIMUM RETURN LOSS FOR 24SP/24SJ:  
(1) -13.97dB, DC TO 40 GHz.  
(2) -10.00dB, DC TO 50 GHz WITH CONTROLLED DEPTH DRILL AND USING AFR DATA.
- CABLE LENGTHS LONGER THAN 1000 MILLIMETERS ARE NOT SUPPORTED BY S.I. DATA.
- DELETED.
- DELETED.

**PROPRIETARY NOTE**  
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 3:2  
Bull's Eye: SHELL, RETAINER, FERRULE, POGO PIN: BRASS INSULATOR: TEFLON  
92SP, 92SJ: SHELL NUT, C-RING, INSERT: STAINLESS STEEL PIN, SOCKET: BeCu INSULATOR: ULTEM1000  
24SP, 24SJ: CONTACT, C-RING: COPPER ALLOY INSULATORS: ULTEM 1000 SOLDER FERRULE: BRASS BODY, CLAMP NUT, COUPLING NUT, BUSHING: STAINLESS STEEL GASKET & O-RING: SILICONE RUBBER



520 PARK EAST BLVD, NEW ALBANY, IN 47150  
PHONE: 812-944-6733 FAX: 812-948-5047  
e-Mail info@SAMTEC.com code 55322

DESCRIPTION:  
40GHz Bulls Eye CABLE ASSEMBLIES

DWG. NO.  
BE40C-XXXX-X-XX-XXXX

BY: PETER D 3/16/2017 SHEET 1 OF 2

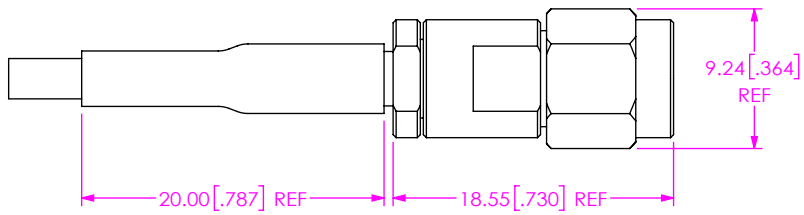


FIG 2  
-92SP SHOWN

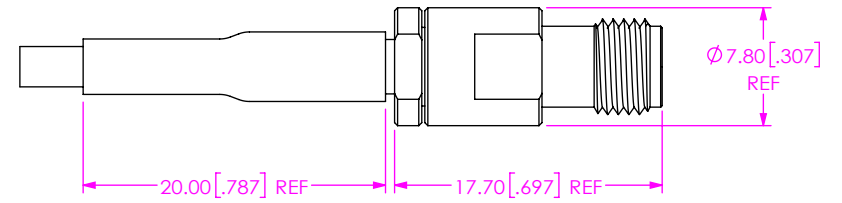


FIG 3  
-92SJ SHOWN

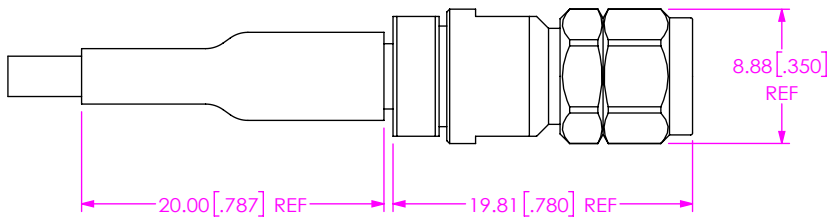


FIG 4  
-24SP SHOWN

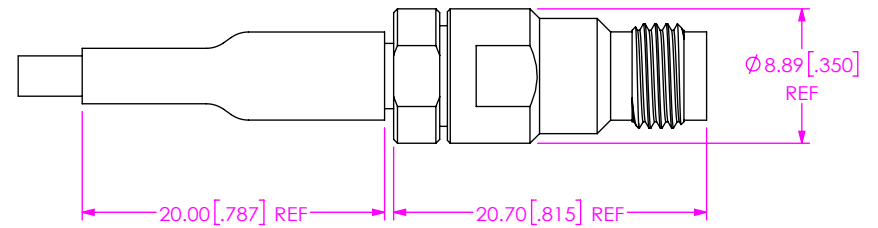


FIG 5  
-24SJ SHOWN

**PROPRIETARY NOTE**  
 THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 2:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150  
 PHONE: 812-944-6733 FAX: 812-948-5047  
 e-Mail info@SAMTEC.com code 55322

DESCRIPTION: 40GHz Bulls Eye<sup>®</sup> CABLE ASSEMBLIES

DWG. NO. BE40C-XXXX-X-XX-XXXX

BY: PETER D 3/16/2017 SHEET 2 OF 2