

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/9/12	

6

5

4



3

2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

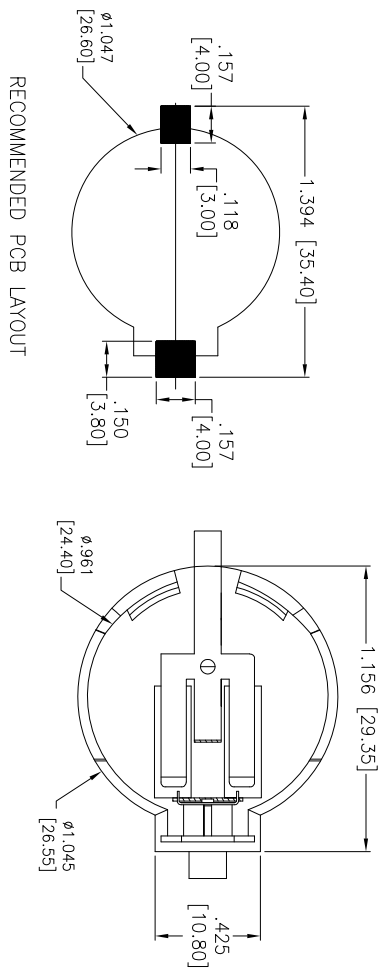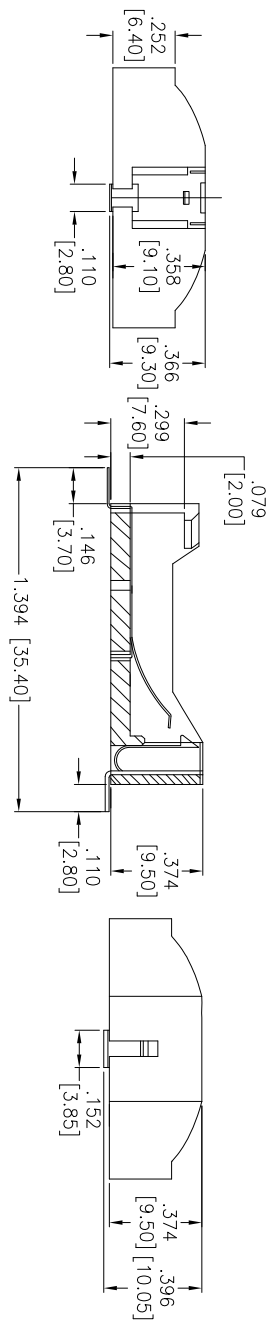

RECOMMENDED PCB LAYOUT

## SPECIFICATIONS:

- Material: Insulator: PBT, glass fiber rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Electrical: Current rating: 30 Milliohms max
- Insulation Resistance: 1000 Mega ohms min
- Dielectric Withstands Voltage: 750V AC for 1 min.
- Temperature Rating: Operating temperature: -55°C to +85°C
- Environmental: Lead free, RoHS compliant
- Recommended soldering temp: 235°C for 5 seconds

## ADAM TECH

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

## 2PIN BATTERY HOLDERS, SMT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLE SIZE		DATE	
.X	± .10	ØX	± .10	ØXXX	± .015	DATE	
.XX	± .020	ØXXX	± .015	ØXXX	± .010		
.XXX	± .015	ØXXX	± .010				
APPROVALS							
DRAWN	AY	2/9/12					
CHECKED	AH	2/9/12					
APPROVED							

6

5

4

3

2

1



SIZE	PART NO.	SCALE	SHEET	REV.
X	BH-55-5	NTS	1 OF 1	-