


# Multi Stepper Click - TB62269

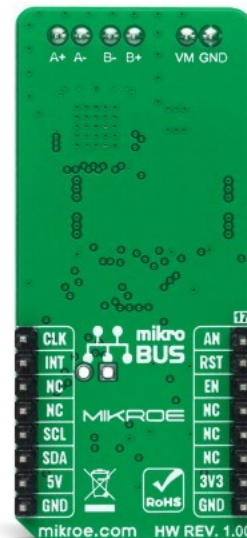

PID: MIKROE-5039

**Multi Stepper Click** is a compact add-on board that contains a bipolar stepper motor driver. This board features the [TB62269FTG](#), PWM method CLOCK-in controlled bipolar stepping motor driver from [Toshiba Semiconductor](#). It supports a PWM constant-current control drive and allows from full-step up to 1/32 steps resolution for less motor noise and smoother control. It has a wide operating voltage range of 10V to 38V with an output current capacity of 1.2A in addition to several built-in error detection circuits. This Click board™ makes the perfect solution for stepping motors in various applications such as office automation, commercial, and industrial equipment.

Multi Stepper Click is supported by a [mikroSDK](#) compliant library, which includes functions that simplify software development. This [Click board™](#) comes as a fully tested product, ready to be used on a system equipped with the [mikroBUS™](#) socket.

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

## Specifications

Type	Stepper
Applications	Can be used for stepping motors in various applications such as office automation, commercial, and industrial equipment
On-board modules	TB62269FTG - CLOCK-in controlled bipolar stepping motor driver from Toshiba Semiconductor
Key Features	Low power consumption, capable of controlling 1 bipolar stepping motor, from full-step up to 1/32 steps resolution, built-in clock decoder, integrated error detection circuits, and more
Interface	GPIO,I2C
ClickID	No
Compatibility	mikroBUS
Click board size	L (57.15 x 25.4 mm)
Input Voltage	3.3V or 5V,External
Driving Signal	Clock
Voltage Max	40V
Current Max	1.8A
Micro Step	32
RDSOn	0.8
ADMD	No
MO	Yes
Error Signal (LO)	Yes
ULVO	No

## Resources

[mikroBUS™](#)
[mikroSDK](#)
[Click board™ Catalog](#)
[Click Boards™](#)

## Downloads

[Multi Stepper Click - TB62269 2D and 3D files](#)
[TB62269FTG datasheet](#)
[PCA9555A datasheet](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

[Multi Stepper Click - TB62269 schematic](#)

[Multi Stepper Click - TB62269 example on Libstock](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).