


## Diffuse reflection sensor with background suppression

O7H-HPKG/0,20M/AS



receiver in upper lens  
transmitter in lower lens

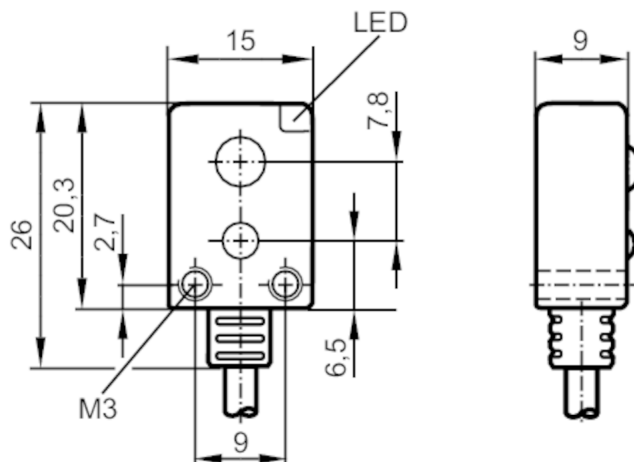

## Product characteristics

Type of light	red light
Housing	rectangular

## Application

Special feature	Background suppression
Function principle	Diffuse reflection sensor

## Electrical data

Operating voltage [V]	10...30 DC; ("supply class 2" according to UL)
Current consumption [mA]	20; ((24 V))
Protection class	III
Reverse polarity protection	yes
Type of light	red light
Wave length [nm]	633

## Outputs

Electrical design	PNP
Output function	light-on mode
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	750
Short-circuit protection	yes
Type of short-circuit protection	pulsed

## Detection zone

Range [mm]	3...100; (white paper 200 x 200 mm)
Range on white object (90 % remission) [mm]	3...100



## Diffuse reflection sensor with background suppression

O7H-HPKG/0,20M/AS

Range on grey object (18 % remission) [mm]	6...80
Range on black object (6 % remission) [mm]	7...46
Range adjustable	no
Max. light spot diameter [mm]	7
Light spot dimensions refer to	at maximum range
Background suppression available	yes

## Operating conditions

Ambient temperature [°C]	-25...60
Protection	IP 65

## Tests / approvals

EMC	EN 60947-5-2
MTTF [years]	1610

## Mechanical data

Weight [g]	14.4
Housing	rectangular
Dimensions [mm]	20.3 x 15 x 9
Materials	PA
Lens material	PMMA
Lens alignment	side lens

## Displays / operating elements

Display	switching status	1 x LED, yellow
---------	------------------	-----------------

## Remarks

Pack quantity	1 pcs.
---------------	--------

## Electrical connection

Cable: 0.2 m, PUR; 3 x 0.14 mm<sup>2</sup>

Connector: 1 x M8; coding: A; Locking: snap-fit





## Diffuse reflection sensor with background suppression

O7H-HPKG/0,20M/AS

### Connection

