


SM2000



Magnetic-inductive flow meter

SMR21XGXFRKG/US

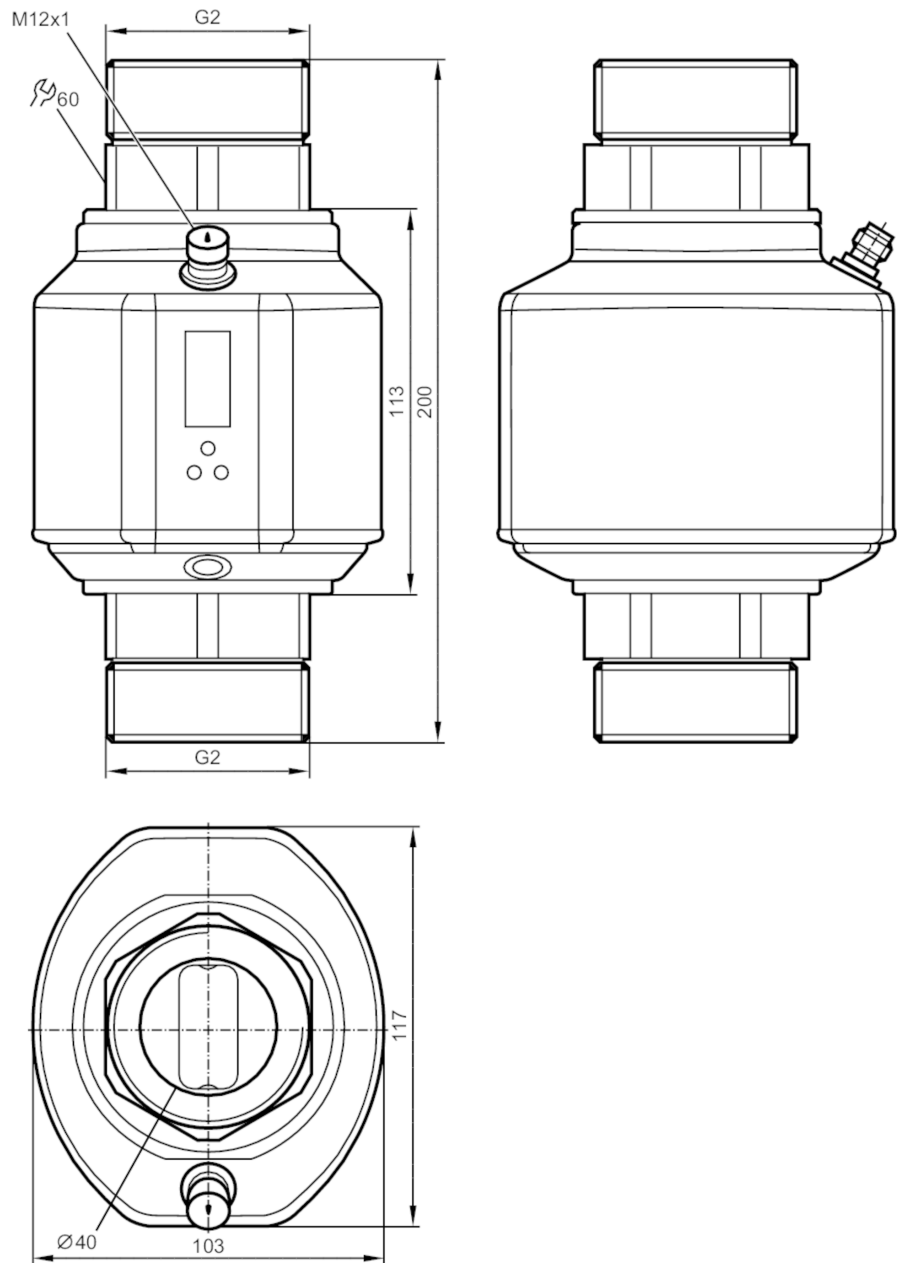

Product characteristics

Number of inputs and outputs	Number of digital outputs: 2; Number of analogue outputs: 1	
Measuring range	5...600 l/min	0.3...36 m³/h
Process connection	threaded connection G 2 DN50 flat seal	

Application

Special feature	Gold-plated contacts
Application	totaliser function; empty pipe detection; for industrial applications
Installation	connection to pipe by means of an adapter
Media	conductive liquids; water; hydrous media



Magnetic-inductive flow meter

SMR21XGXFRKG/US

Note on media		conductivity: $\geq 20 \mu\text{S/cm}$
		viscosity: $< 70 \text{ mm}^2/\text{s}$ (40 °C)
Medium temperature	[°C]	-10...80
Pressure rating	[bar]	16
Pressure rating	[Mpa]	1.6
MAWP (for applications according to CRN)	[bar]	16

Electrical data		
Operating voltage	[V]	18...32 DC; (to SELV/PELV)
Current consumption	[mA]	< 150
Protection class		III
Reverse polarity protection		yes
Power-on delay time	[s]	5

Inputs / outputs	
Number of inputs and outputs	Number of digital outputs: 2; Number of analogue outputs: 1

Inputs	
Inputs	counter reset

Outputs		
Total number of outputs		2
Output signal		switching signal; analogue signal; pulse signal; frequency signal; IO-Link; (configurable)
Electrical design		PNP/NPN
Number of digital outputs		2
Output function		normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC	[V]	2
Permanent current rating of switching output DC	[mA]	250; (per output)
Number of analogue outputs		1
Analogue current output	[mA]	4...20; (scalable)
Max. load	[Ω]	500
Analogue voltage output	[V]	0...10; (scalable)
Min. load resistance	[Ω]	2000
Pulse output		flow rate meter
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Frequency of the output	[Hz]	0.1...10000

Measuring/setting range		
Measuring range	5...600 l/min	0.3...36 m³/h
Display range	-720...720 l/min	-43.2...43.2 m³/h
Resolution	0.5 l/min	0.02 m³/h
Set point SP	8...600 l/min	0.5...36 m³/h
Reset point rP	5...597 l/min	0.3...35.8 m³/h
Analogue start point ASP	0...480 l/min	0...28.8 m³/h
Analogue end point AEP	120...600 l/min	7.2...36 m³/h



Magnetic-inductive flow meter

SMR21XGXFRKG/US

Low flow cut-off LFC	<div>< 15 l/min</div>	<div>< 0.9 m³/h</div>
In steps of	<div>0.5 l/min</div>	<div>0.02 m³/h</div>
Measuring dynamics	<div>1:120</div>	
Volumetric flow quantity monitoring		
Pulse value	<div>0.0001...600 x 10³ m³</div>	
In steps of	<div>0.0001 m³</div>	
Pulse length [s]	<div>0,008...2</div>	
Temperature monitoring		
Measuring range [°C]	<div>-20...80</div>	
Display range [°C]	<div>-40...100</div>	
Resolution [°C]	<div>0.2</div>	
Set point SP [°C]	<div>-19.2...80</div>	
Reset point rP [°C]	<div>-19.6...79.6</div>	
Analogue start point [°C]	<div>-20...60</div>	
Analogue end point [°C]	<div>0...80</div>	
In steps of [°C]	<div>0.2</div>	
Accuracy / deviations		
Flow monitoring		
Accuracy (in the measuring range)	<div>± (0,8 % MW + 0,5 % MEW)</div>	
Repeatability	<div>± 0,2% MEW</div>	
Temperature monitoring		
Temperature drift	<div>± 0,0333 °C / K</div>	
Accuracy [K]	<div>± 1 (bei 25 °C, Q > 15 l/min)</div>	
Response times		
Flow monitoring		
Response time [s]	<div>0.35; (dAP = 0)</div>	
Delay time programmable dS, dr [s]	<div>0...50</div>	
Damping process value dAP [s]	<div>0...5</div>	
Temperature monitoring		
Dynamic response T05 / T09 [s]	<div>T09 = 3 (Q > 15 l/min)</div>	
Software / programming		
Parameter setting options	<div>Flow monitoring; quantity meter; Preset counter; Temperature monitoring; hysteresis / window; normally open / normally closed; switching logic; current/voltage/frequency/pulse output; start-up delay; display can be deactivated; Display unit; empty pipe detection</div>	
Interfaces		
Communication interface	<div>IO-Link</div>	
Transmission type	<div>COM2 (38,4 kBaud)</div>	
IO-Link revision	<div>1.1</div>	
SDCI standard	<div>IEC 61131-9 CDV</div>	
Profiles	<div>Smart Sensor: Process Data Variable; Device Identification</div>	
SIO mode	<div>yes</div>	
Required master port type	<div>A</div>	

SM2000



Magnetic-inductive flow meter

SMR21XGXFRKG/US

Process data analogue		3
Process data binary		2
Min. process cycle time	[ms]	5
Supported DeviceIDs	Type of operation	DeviceID
	Default	389

Operating conditions		
Ambient temperature	[°C]	-10...60
Storage temperature	[°C]	-25...80
Protection		IP 65; IP 67

Tests / approvals		
EMC	DIN EN 60947-5-9	
CPA approval	model number	004MI
	accuracy class	-
	maximum allowable error	± 1,5 % FS
	Q (min)	0,3 m³/h
	Q (t)	-
	Q (max)	36 m³/h
	Medium temperature	-10...70°C
Shock resistance	DIN EN 60068-2-27	20 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)
MTTF	[years]	85
UL approval	UL Approval no.	I008
	File number UL	E174189
Pressure Equipment Directive	Sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	

Mechanical data		
Weight	[g]	3208
Materials	stainless steel (1.4404 / 316L); stainless steel (1.4571/316Ti); PEI; FKM; PBT-GF20; TPE-U	
Materials (wetted parts)	stainless steel (1.4404 / 316L); stainless steel (1.4571/316Ti); PEEK; Centellen; FKM	
Process connection	threaded connection G 2 DN50 flat seal	

Displays / operating elements		
Display	Display unit	6 x LED, green (l/min, m³/h, l, m³, 10³, °C)
	switching status	2 x LED, yellow
	measured values	alphanumeric display, 4-digit
	programming	alphanumeric display, 4-digit

Accessories		
Items supplied	sealings: 2, Centellen	
	Label	

Remarks		
Remarks	MW = measured value	
	MEW = Final value of the measuring range	
Pack quantity	1 pcs.	

SM2000




Magnetic-inductive flow meter


SMR21XGXFRKG/US

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

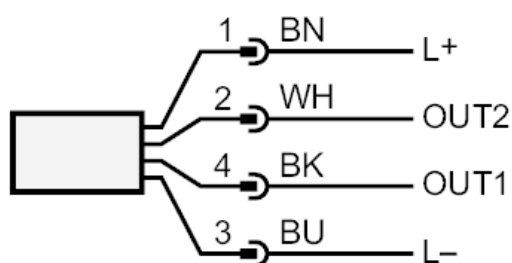

OUT1:	colours to DIN EN 60947-5-2 switching output empty pipe detection switching output volumetric flow quantity monitoring frequency output volumetric flow quantity monitoring Pulse output quantity meter signal output Preset counter IO-Link
OUT2:	switching output empty pipe detection switching output volumetric flow quantity monitoring switching output Temperature monitoring analogue output volumetric flow quantity monitoring analogue output Temperature monitoring input counter reset Core colours :
BK =	black
BN =	brown
BU =	blue
WH =	white

SM2000

Magnetic-inductive flow meter


SMR21XGXFRKG/US



Diagrams and graphs

Pressure loss

dP [mbar] DN50

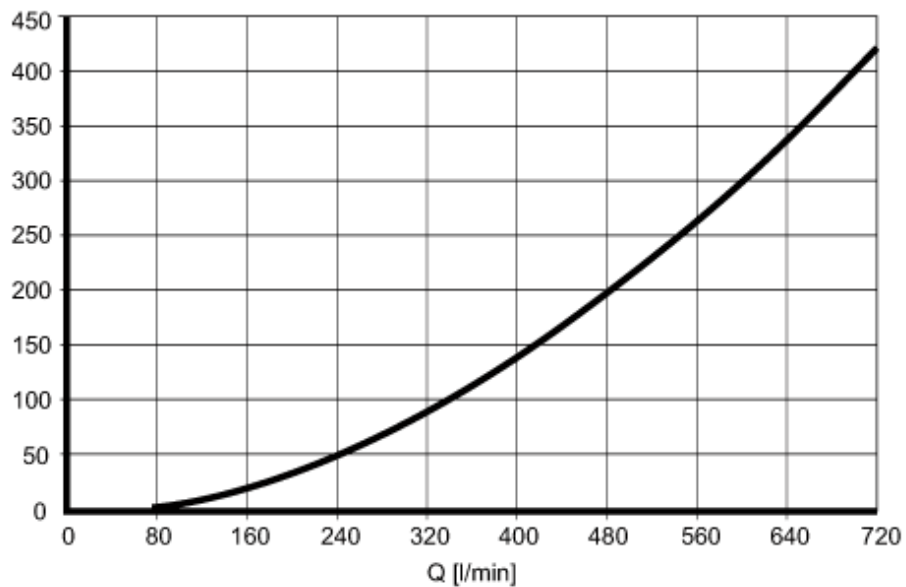

dP Pressure loss

Q volumetric flow quantity