



circuit breaker 3VA6 UL frame 400 breaking capacity class M 35kA @ 480 V 3-pole, line protection ETU820, LI, In=400A overload protection Ir=160A ...400A short-circuit protection Ii=1.5...10 x In cable connection on both sides

Model	
product brand name	SETRON
product designation	Molded-case circuit breaker
product designation / according to UL file	MJAE
Product version	System protection
design of the load switch / acc. to UL 489 / Heating, Air Conditioning, and Refrigeration circuit breaker (HACR Type)	Yes
design of the overcurrent release	ETU820
protection function of the overcurrent release	LI
number of poles	3
General technical data	
rated insulation voltage Ui	800 V
power loss [W] / maximum	70 W
Active power loss / for rated value of the current / at AC / in hot operating state / per pole	23.33 W
mechanical service life (switching cycles) / typical	20 000
Electrical endurance (switching cycles) / at AC-1 / at 380/415 V 50/60 Hz	6 000
Electrical endurance (switching cycles) / at AC-1 / at 690 V 50/60 Hz	4 200
electrical endurance (switching cycles) / at 480 V	6 000
electrical endurance (switching cycles) / at 600 V	4 200
Neutral conductors / upgradeable/retrofitable	No
ground-fault monitoring version	Without
product function	
• communication function	Yes
• other measurement function	Yes
Net Weight	5,996 kg
Current	
marking / acc. to UL 489 / 100%-rated breaker	No
operational current	
• at 40 °C	400 A
• at 45 °C	400 A
• at 50 °C	400 A
• at 55 °C	375 A
• at 60 °C	350 A
• at 65 °C	325 A
• at 70 °C	300 A
Switching capacity according to IEC 60947	

switching capacity class of the circuit breaker		M		
breaking capacity maximum short-circuit current (Icu)				
• at 240 V		85 kA		
• at 415 V		55 kA		
• at 690 V		5 kA		
breaking capacity operating short-circuit current (Ics)				
• at 240 V		85 kA		
• at 415 V		55 kA		
• at 690 V		5 kA		
short-circuit current making capacity (Icm)				
• at 240 V		187 kA		
• at 415 V		121 kA		
• at 690 V		7.5 kA		
Switching capacity according to UL 489				
breaking capacity current				
• at 240 V		100 kA		
• at 480 V		35 kA		
• at 600 V		18 kA		
Adjustable parameters				
Adjustable response value current / Ig min.		0.5 s		
Adjustable response value current / Ig min.		17 s		
Adjustable response value current / Ii min.		600 A		
Adjustable response value current / Ii max.		4 000 A		
Ground fault protection / tripping switchable / I2t=ON/OFF		No		
Mechanical Design				
height [in]		9.76 in		
Height		248 mm		
width [in]		5.43 in		
Width		138 mm		
depth [in]		4.33 in		
depth		110 mm		
Connections				
arrangement of electrical connectors / for main current circuit		Front connection		
Type of connectable conductor cross-section, round conductor terminal, stranded		1 x (6 AWG - 350 kcmil)		
Auxiliary circuit				
product component				
• undervoltage release		No		
• voltage trigger		No		
• trip indicator		No		
number of CO contacts / for auxiliary contacts		0		
Accessories				
product extension / optional / motor drive		Yes		
Environmental conditions				
protection class IP / on the front		IP40		
ambient temperature				
• during operation / minimum		-25 °C		
• during operation / maximum		70 °C		
• during storage / minimum		-40 °C		
• during storage / maximum		80 °C		
Certificates				
reference code / acc. to IEC 81346-2		Q		
certificate of suitability / as approval for NAVAL (no combat vessels) / supplement SB		Yes		
General Product Approval		EMC	Declaration of Conformity	other



[UK Declaration of Conformity](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA6340-5KL36-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA6340-5KL36-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA6340-5KL36-0AA0



CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

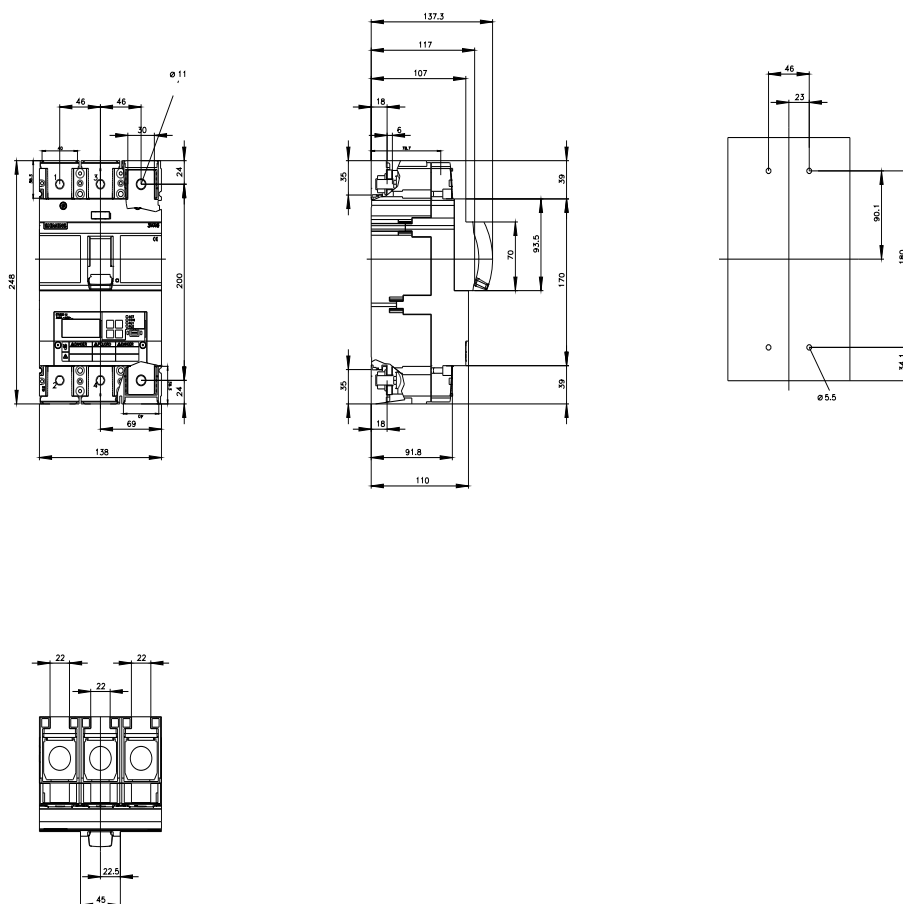

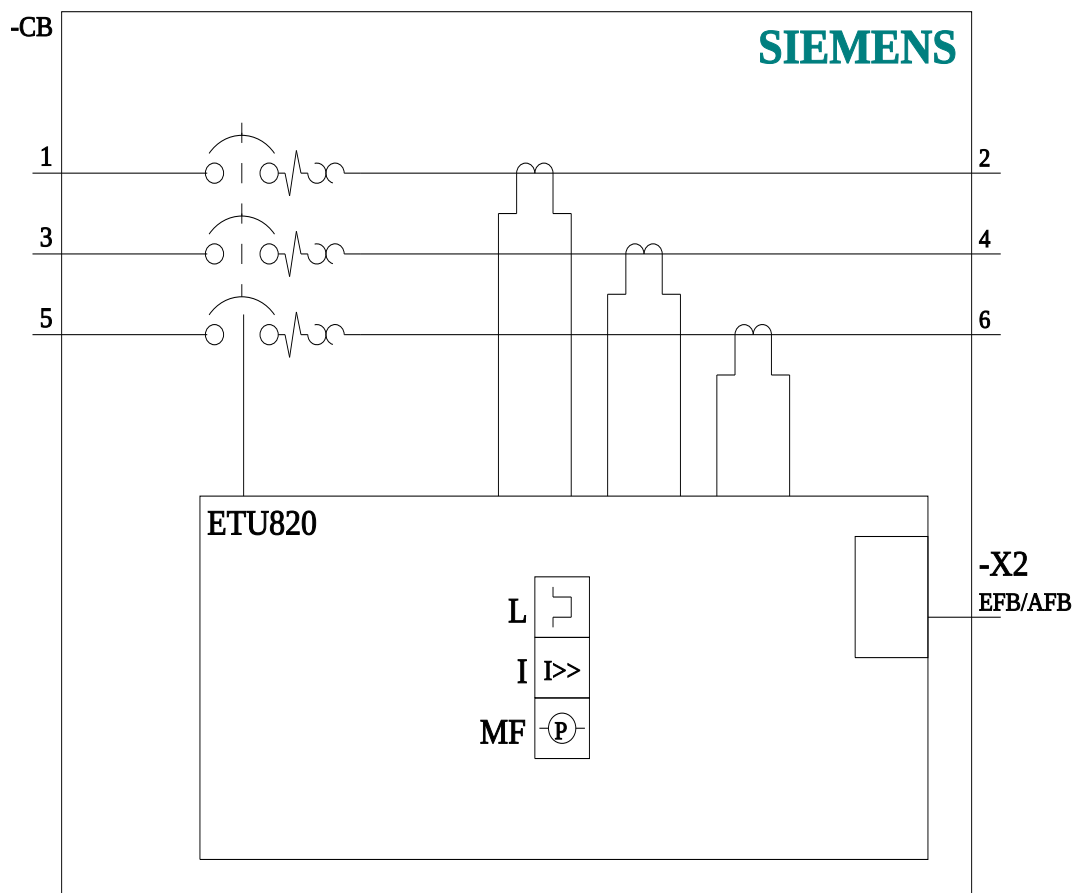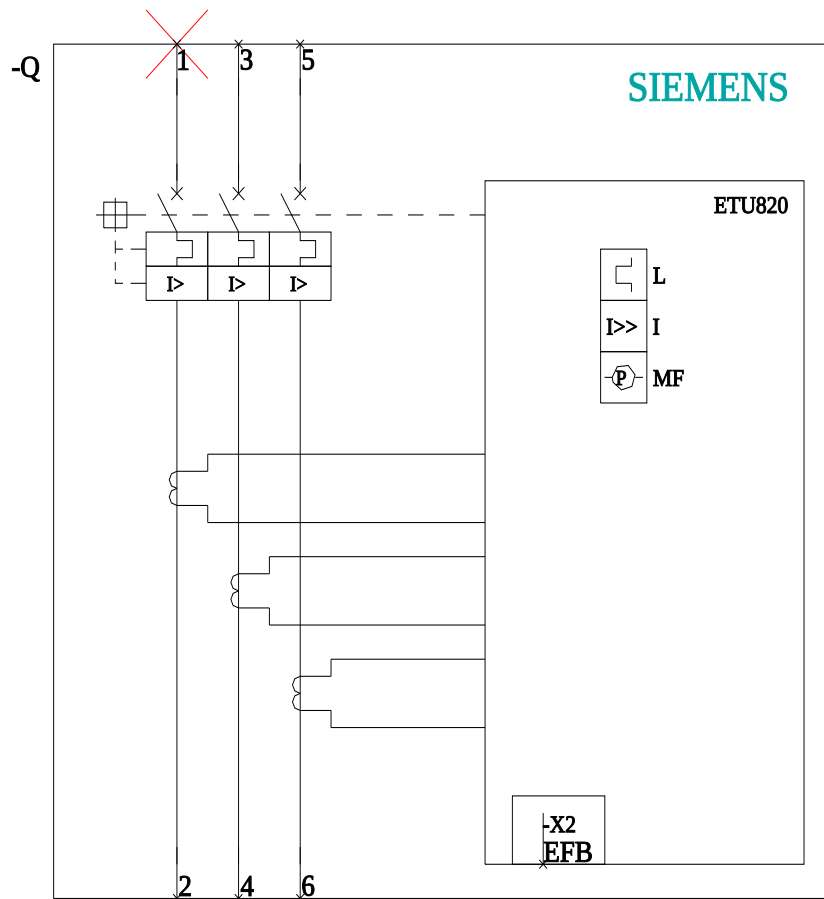

last modified:

11/25/2021

