



## VRLA Rechargeable Battery

# BP5-6 (BP5-6FR)



### FEATURES

- Maintenance free(no water topping-up required).
- No free acid(Non-spillable battery).
- Low self-discharge rate, lower than 3% capacity loss per month.
- Can be used in any orientation(excluding used inverted).
- Absorbent Glass Mat technology for efficient gas recombination.

### APPLICATION

- UPS
- Fans
- Electronic Toy-Cars
- Emergency Lights
- Rechargeable Flashlights



### SPECIFICATIONS

Nominal Voltage	6 V
Nominal Capacity	5.0Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	950g(2.09lbs.)
Terminals	T1 (Faston Tab 187) T2 is optional
Internal Resistance	≤13.5mΩ (Fully Charged )
Max. Discharge Current	75 A (5 sec.)
Max. Charge Current	1.50 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F)
Container Material	ABS(UL94-HB, UL94-V0 is optional)



ISO 9001	
ISO14001	
UL	 MH19884
CE	 C4M20310-2474-E-16
<ul style="list-style-type: none"> <li>● IEC 61056-1</li> <li>● JIS C 8702-1</li> <li>● GB/T 19639.1</li> </ul>	

### DIMENSION(mm/inch)

### OUTER DIMENSIONS

### TERMINAL TYPE

- **Length**  
70±1.5 (2.76±0.06)
- **Width**  
48±1.5 (1.89±0.06)
- **Container Height**  
102±1.5 (4.02±0.06)
- **Total Height**  
107±2.0 (4.21±0.08)

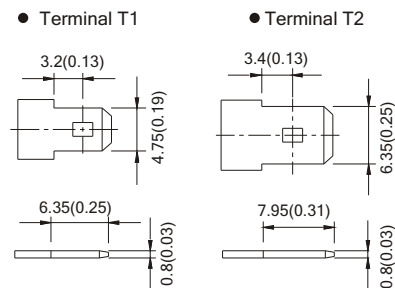

### Constant power discharge characteristics at 25 °C/77 °F

Unit: W

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	90.4	66.5	53.3	31.7	18.20	7.29	5.02	2.808	1.478
1.75V	104.6	72.1	55.8	32.9	18.74	7.43	5.10	2.850	1.500
1.70V	111.2	74.7	57.5	33.7	19.08	7.50	5.13	2.864	1.506
1.65V	116.2	76.5	58.8	34.2	19.31	7.55	5.15	2.873	1.512
1.60V	120.0	78.0	60.0	34.5	19.50	7.60	5.16	2.873	1.512

### Constant current discharge characteristics at 25 °C/77 °F

Unit: A

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	16.29	11.71	9.27	5.38	3.06	1.21	0.837	0.468	0.246
1.75V	19.20	12.69	9.70	5.58	3.15	1.24	0.850	0.475	0.250
1.70V	20.40	13.15	10.00	5.71	3.21	1.25	0.855	0.477	0.251
1.65V	21.31	13.46	10.23	5.79	3.24	1.26	0.858	0.479	0.252
1.60V	22.02	13.73	10.43	5.85	3.28	1.27	0.860	0.479	0.252

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.