
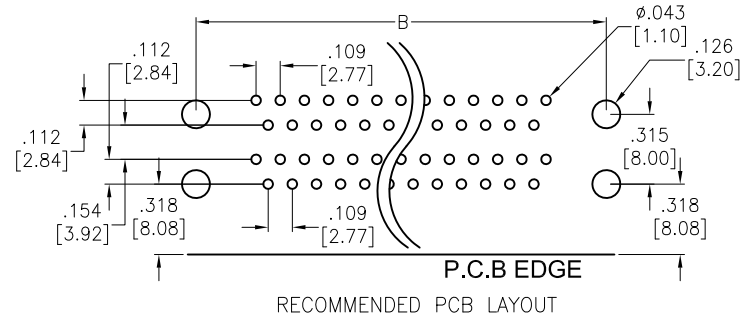


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/22/04	
A		REDRAWN	10/16/14	AY/NP

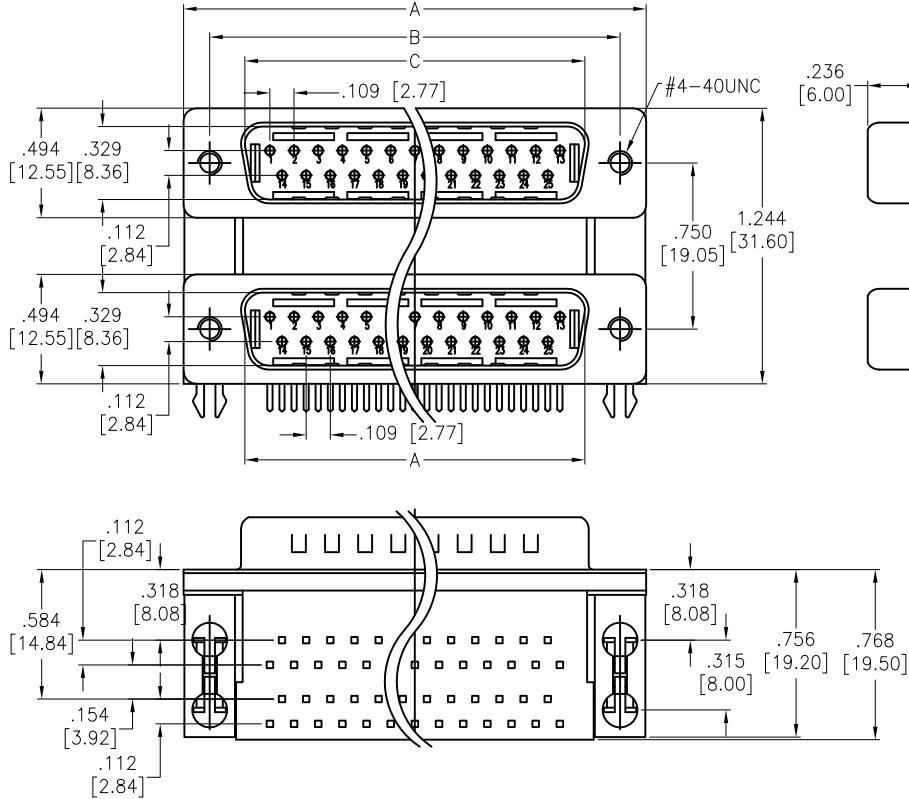

SPECIFICATIONS:

Material:
 Insulator: PBT, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Shell: SPCC, Nickel plated
 Boardlock: Copper Alloy, Tin plated
 Bracket: Zinc Alloy, Nickel plated
 Plating:
 Gold plated over Nickel at Contact Area,
 Tin Plated over Nickel at Solder Area.
 Electrical:
 Voltage: 250 VAC max
 Current rating: 3 Amps max
 Contact resistance: 25 mohms max
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -55°C to +85°C
 Environmental:
 Lead free, RoHS compliant.



POSITIONS	Dimensions		
	A	B	C
9	1.213 [30.81]	.984 [24.99]	.666 [16.92]
15	1.543 [39.19]	1.312 [33.32]	.971 [24.66]
25	2.088 [53.04]	1.852 [47.04]	1.534 [38.96]
37	2.729 [69.32]	2.500 [63.50]	2.182 [55.42]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .X ±.10 Ø.X ±.10
 .XX ±.020 Ø.XX ±.015
 .XXX ±.015 Ø.XXX ±.010

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 DUAL PORT D-SUB, RIGHT ANGLE
 MALE / MALE, XX POSITION, .750" PORT

APPROVALS		DATE
DRAWN	SS	11/22/04
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	DPD-XX-11-B3	A
REF: S00027T	SCALE: NTS	SHEET 1 OF 1