



DATE	REV	ECN	APP'D. BY
10/20/20	A0	RELEASED	ADB
-	-	-	-

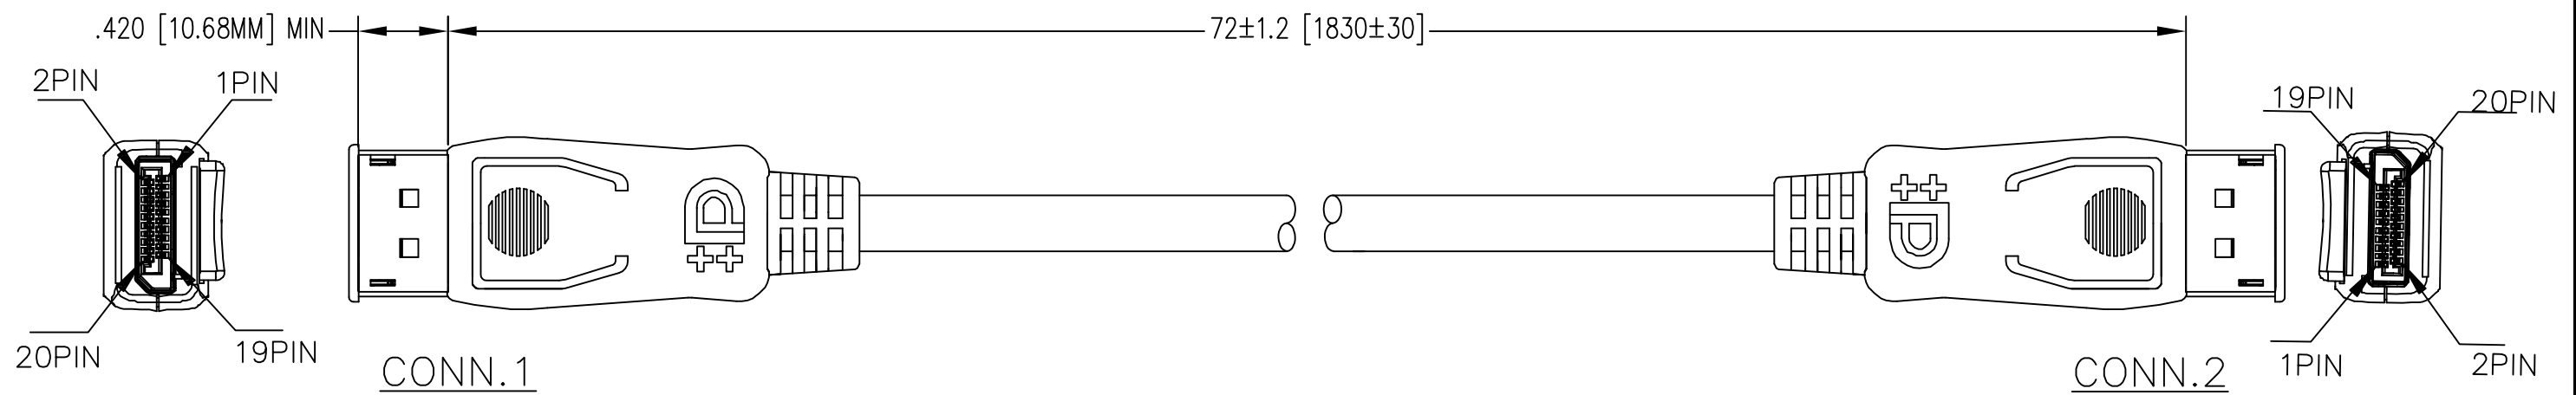


PIN ASSIGNMENT

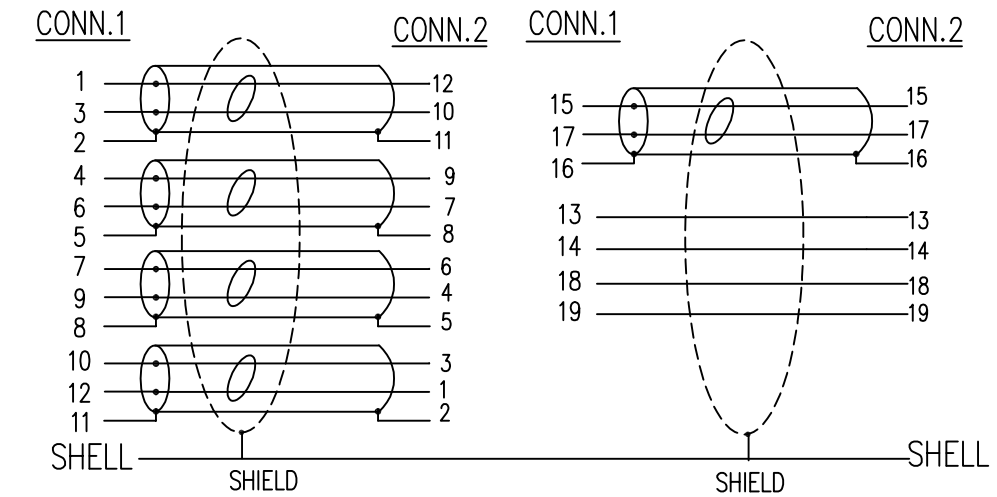

NOTES:

- COMPLIANT WITH DISPLAYPORT 1.4 SPECIFICATION.
- CONNECTOR COMPONENTS:
 TRANSPARENT DUST COVER
 INSIDE MOLDING: LDPE
 STRAIN RELIEF: 45P PVC, BLACK
 OUTSIDE MOLDING: ABS, BLACK
 SHELL PLATING: GOLD FLASH
 CONTACT: GOLD PLATING
 CABLE: DP1.4
 [30AWG(7/0.10TC)+EAM]*5P+30AWG(7/0.10TC)*4C+AEB(16/10/0.12 85%AL)
 OD: 0.24 [6.0] COLOR: BLACK
 CABLE PRINTING: DISPLAYPORT CABLE E342987 AWM STYLE 20276 80°C 30V VW-1
- ELECTRICAL TESTING:
 100% OPEN & SHORT & CONTINUITY WIRE TEST
 CONTACT RESISTANCE: 2 OHM MAX.
 INSULATION RESISTANCE: 10M OHM MIN.
 HI-POT:100V DC/10ms
- PACKAGING:
 ONE CABLE PER BAG



P/N	LENGTH
BC-4D4D006F	72 [1830]

THIRD ANGLE PROJECTION


DO NOT SCALE DRAWING
 DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE
 DIMENSIONS: INCHES [METRIC]
 UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°
 SHEET NO. 1 OF 1

206 Van Vorst Street
 Jersey City, NJ 07302
 +1 201 432 0463
<http://www.belfuse.com>

TITLE: DISPLAY PORT 1.4 CABLE, MALE TO MALE, 6 FEET

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF BEL FUSE, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF BEL FUSE, INC.

DRN BY: JE	DATE 10/07/20
APPD BY: ADB	DATE 10/20/20
DWG NO. CT999226	REV. A0



ASSEMBLY FORMAT REV. 6/3/05