



DATE	REV	ECN	APP'D. BY
10-29-21	A0	11878	ABD
2-7-22	A1	11929	JME

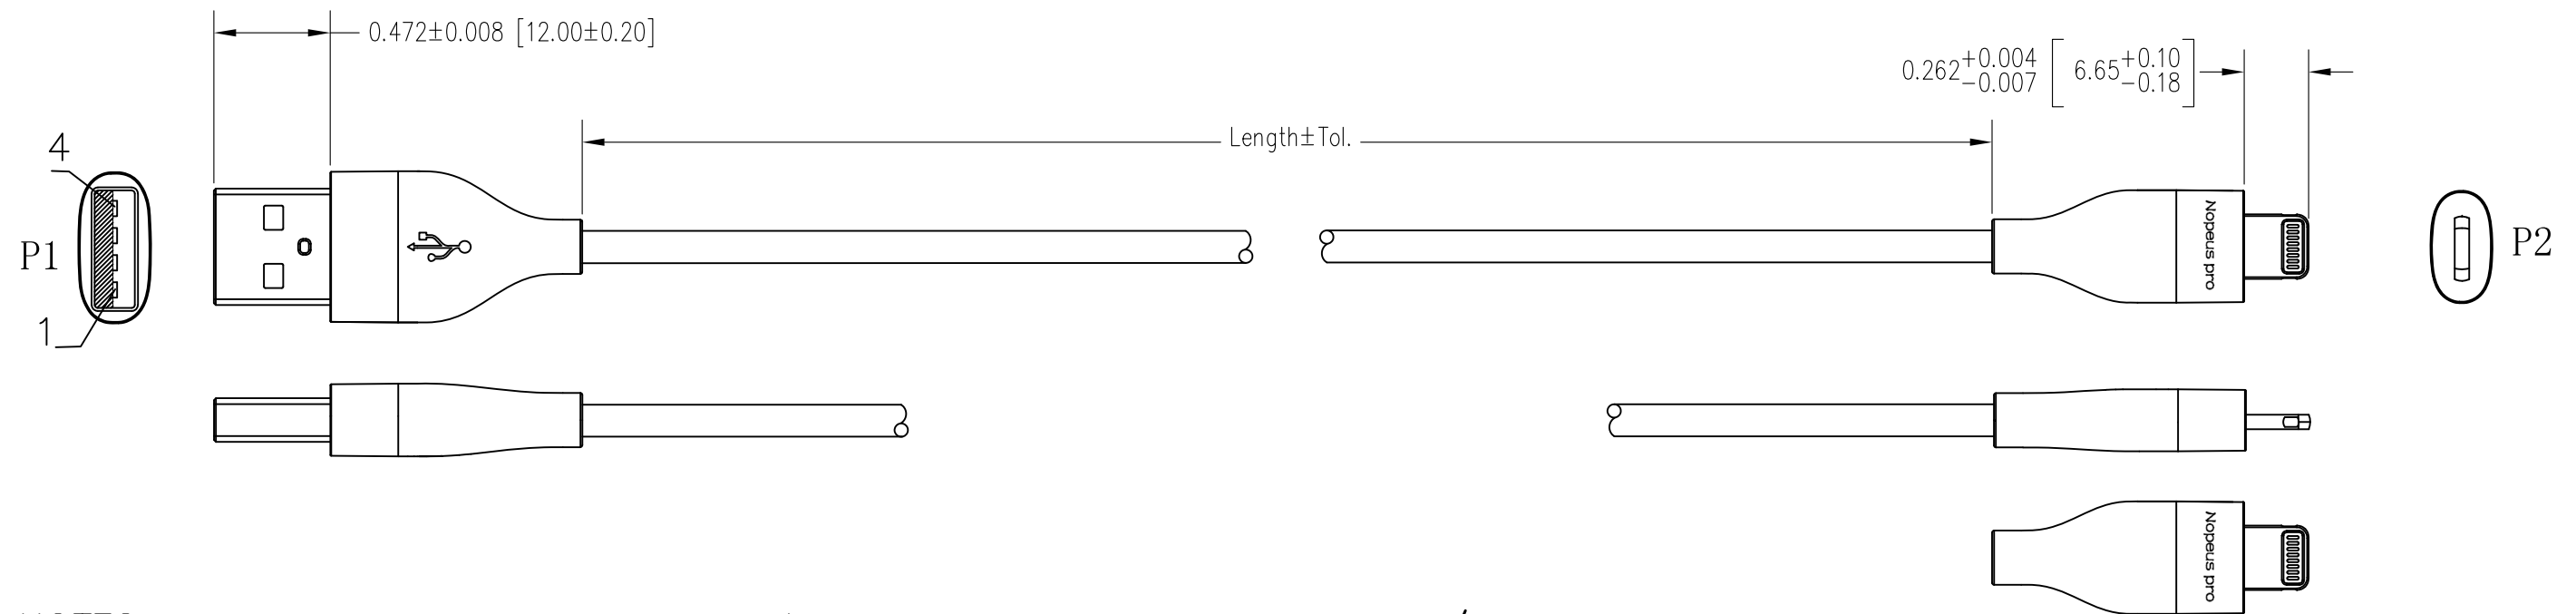

NOTES:

- 1) MFi CERTIFIED
- 2) EACH CABLE ASSEMBLY TO BE INDIVIDUALLY BAGGED.
- 3) CABLE CONSTRUCTION PVC
 - 3.7MM OD
 - WHITE JACKET
- 4) CONNECTOR P1: USB A MALE 2.0 WHITE INSULATOR,
 - NICKEL PLATED TIN SHELL
 - WHITE PVC EXTERIOR MOLDING
- 5) CONNECTOR P2: i5 C89
 - NICKEL PLATED TIN SHELL
 - WHITE PVC EXTERIOR MOLDING
- 6) ALL CABLES TESTED FOR CONTINUITY & SHORTS
 - CONTACT RESISTANCE 3 OHM MAX.
 - INSULATION RESISTANCE 10M OHM

P/N STRUCTURE:

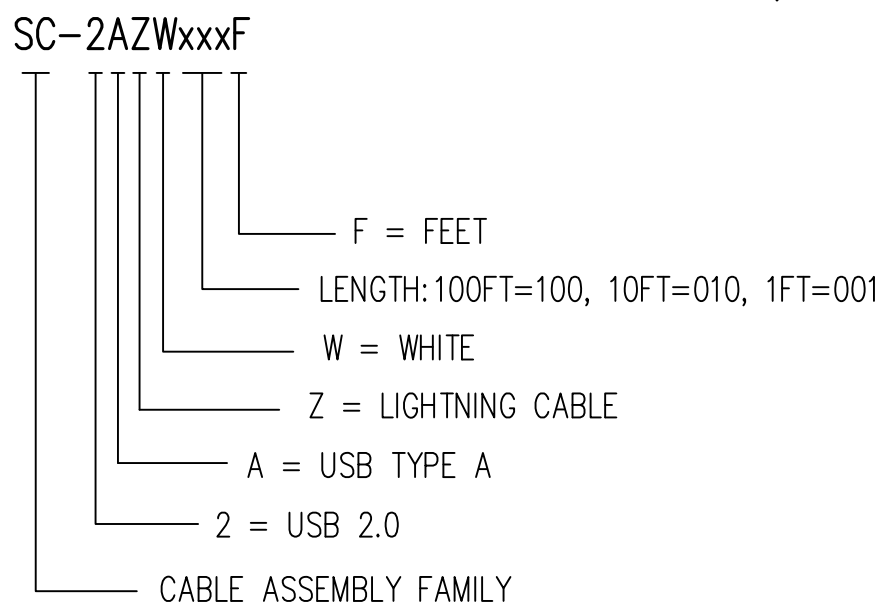

O/A Length Tolerance:

<u>Metric</u>
915mm ±20mm
1830mm ±30mm
<u>Imperial</u>
3ft ±0.5in
6ft ±0.75in

Pin Assignment			
USB AM			C89
1	Red	1	VBUS
2	White	2	D-
3	Green	3	D+
4	Drain	5	GND1
SHELL	Braid		SHELL

PART NUMBERS REFERENCE TABLE	
LENGTH	PART NUMBER
3 FT	SC-2AZW003F
6 FT	SC-2AZW006F



THIRD ANGLE PROJECTION 		206 Van Vorst Street Jersey City, NJ 07302 +1 201 432 0463 http://www.belfuse.com
DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE	TITLE: USB 2.0 to i5 C89 Lightning Cable White	
DIMENSIONS: METRIC UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±0.13 ANGLES ARE ± 1°	DRN BY: JMM DATE: 10-27-21	APPD BY: ADB DATE: 10-29-21
SHEET NO. 1 OF 1	DWG NO. CT999270	REV. A1