


# SCPS9050

## SMD POWER INDUCTORS

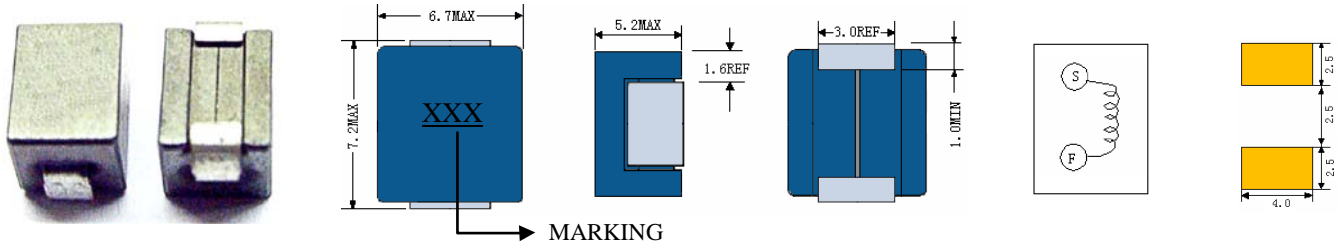



### • Features

1. Surface mount inductors designed for high speed switch mode applications requiring low inductance and high current.
2. 125°C operating temperature.
3. Inductance range from 0.010uH to 0.220uH.
3. High Current - up to 50 Amps.

## ELECTRICAL CHARACTERISTICS



Part Number	Inductance (uH) (1)	Test Frequency	DC Resistance (Ω MAX) (2)	Saturation Current <sup>(3)</sup> (A)	Temperature Current <sup>(4)</sup> (A)
SCPS9050-R10	0.01	1MHZ	0.35	50	28
SCPS9050-R12	0.12	1MHZ	0.35	42	28
SCPS9050-R15	0.15	1MHZ	0.35	33	28
SCPS9050-R20	0.20	1MHZ	0.35	25	30
SCPS9050-R22	0.22	1MHZ	0.35	23	32

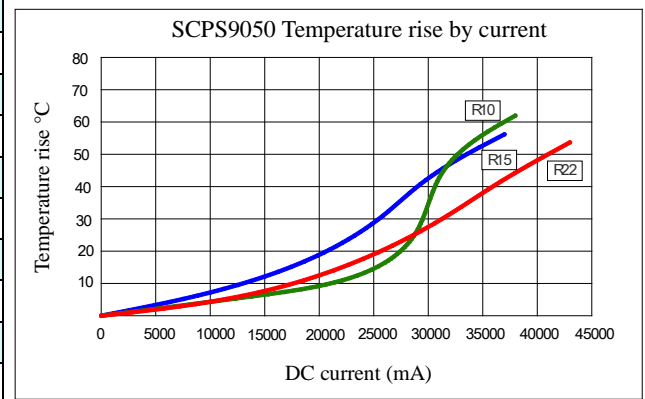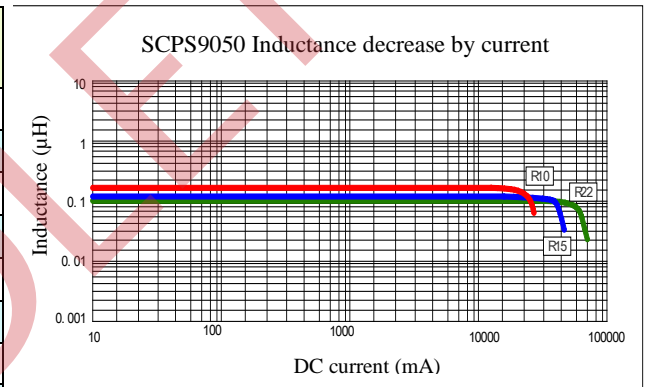

- (1). Inductance tolerance  $\pm 20\%$  tested at 0.25V, 0ADC and 25°C
- (2). DCR measured at 25°C.
- (3). The DC current at which the inductance decreases by 30% from its initial value.
- (4). The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

Custom versions available upon request.

© 2019 Signal Transformer –Specification subject to change without notice. 12.19



[belfuse.com/signal](http://belfuse.com/signal)

128 Atlantic Avenue, Lynbrook, NY 11563  
Toll Free 866-239-5777 • Tel 516-239-5777 • Fax 516-239-7208  
[Sales@signaltransformer.com](mailto:Sales@signaltransformer.com) • [techhelp@signaltransformer.com](mailto:techhelp@signaltransformer.com)