
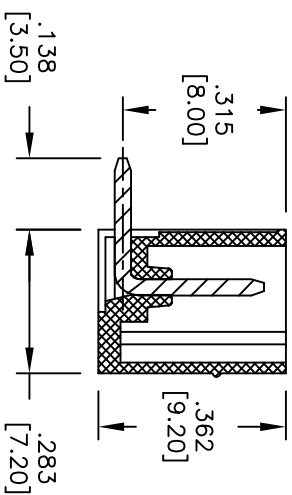
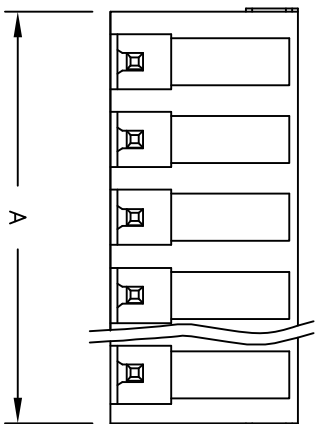


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/22/09	
A		REVISED SHAPE	7/21/11	

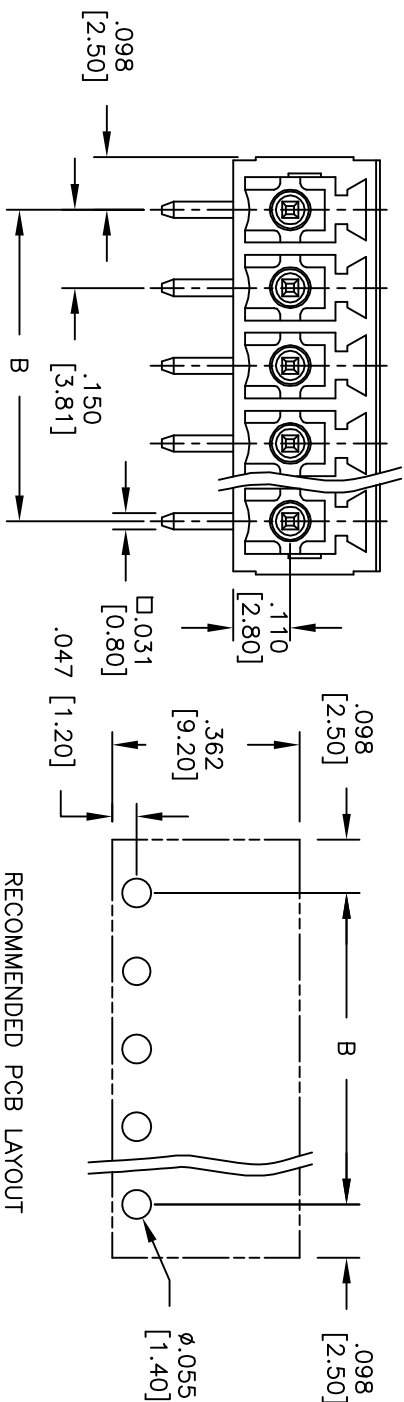

POLES	Tolerance
2-6P	±.006 [0.15]
7-12P	±.008 [0.20]
13-18P	±.010 [0.25]
19-24P	±.012 [0.30]

Poles: 2 thru 24
 A = .150 [3.81] x No. of (Poles - 1) + .197 [5.00]
 B = .150 [3.81] x No. of (Poles - 1)

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 .150 [3.81] TERMINAL BLOCK

SPECIFICATIONS:
 Material:
 Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Green
 Contact: Copper alloy, Tin plated
 Electrical:
 Operation voltage: 300 VAC max
 Current rating: 10 Amps max
 Withstanding voltage: 1.6kv
 Environmental:
 Operating temperature: -40°C to +115°C
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES EXCEPT AS NOTED	
INCHES	HOLES
.X ±.10	ØXX ±.10
.XX ±.020	ØXXX ±.015
.XXX ±.015	ØXXXX ±.010
APPROVALS	DATE
DRAWN DY	10/22/09
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	EB3-XX-B	A
REF:	S00007T	SCALE: NTS
		SHEET 1 OF 1