

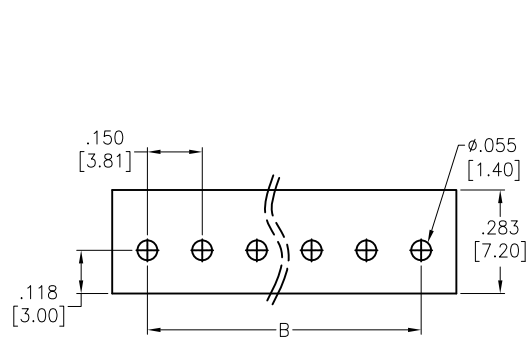



APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/5/14	
A		REVISED SPEC.	6/4/14	HR/VY
B		UPDATE DRAWING	1/9/18	AY/KC
C		UPDATE DRAWING	10/20/20	LH/EY

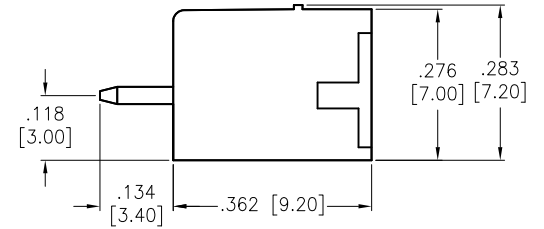

RECOMMENDED PCB LAYOUT

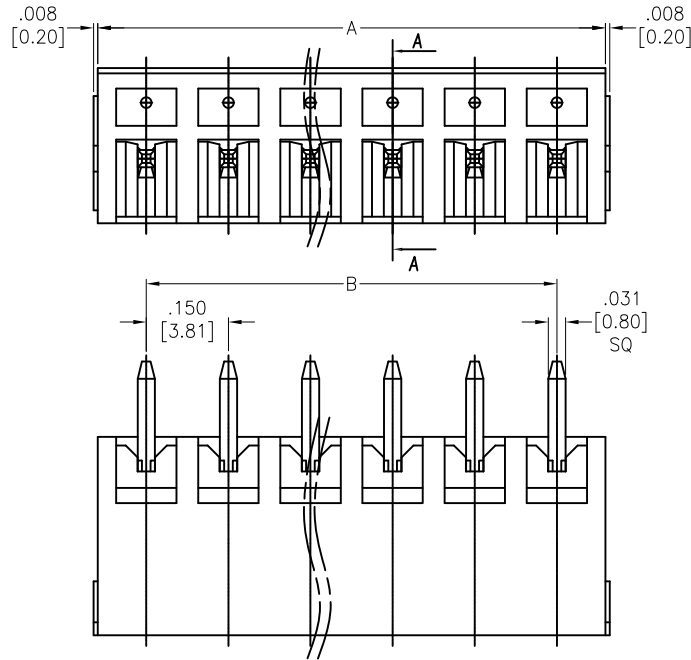

Positions: 02 thru 24
 A= .150 [3.81] x No. of Spaces + .181 [4.60]
 B= .150 [3.81] x No. of Spaces

SPECIFICATIONS:

Material:
 Insulator: PA66, rated UL 94V-0
 Insulator color: Green
 Contact: Copper Alloy, Tin plated

Electrical:
 Voltage rating: 300 VAC
 Current rating: 8 Amp
 Dielectric withstanding voltage: 1,600 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	HR	5/5/14	
CHECKED	SY	5/5/14	
APPROVED			

ADAM TECH 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE: **TERMINAL BLOCK, STRAIGHT, .150" [3.81] PITCH**

SIZE X	PART NO. EBRA-XX-B	REV. C
REF: S00067C	SCALE: NTS	SHEET 1 OF 1