


# EDSTL132/X

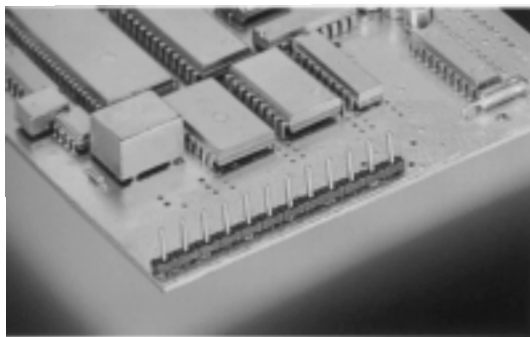

2-24 poles, Spacing 5.0 mm

insert required no. of poles **X**

How to order see page 5



## Ratings:

Rated Voltage

300 V

250 V

Rated Current

10 A

10 A (T55)

Rating Impulse Voltage/Dirt Level

4 kV/3

## Dimensions

Spacing

5.0 mm

PCB Hole Diameter

1.2 mm

## Materials

Insulating Material

PA

Flammability Class

UL94 V-0

Temperature Range


-30°C/+105°C

Contact Pin

CuZn

## Color

Black

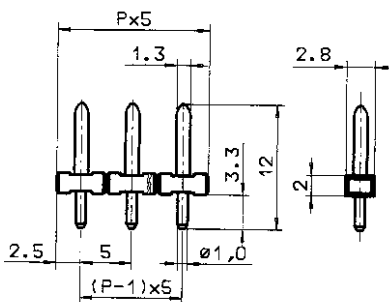

**P = No. of poles**