


3-phase busbars Modular spacing 55 mm for 4 switches and accessories Fork shape connections



| General technical data | | |
|---|---|--|
| size of the circuit-breaker | | S00, S0 |
| suitability for use | | circuit-breakers 3RV2 |
| protection class IP on the front according to IEC 60529 | | IP20 |
| touch protection on the front according to IEC 60529 | | finger-safe, for vertical contact from the front |
| Installation/ mounting/ dimensions | | |
| operational current rated value | A | 63 |
| number of poles for main current circuit | | 3 |
| type of electrical connection for main current circuit | | screw-type terminals |
| Certificates/ approvals | | |
| General Product Approval | | Declaration of Conformity |

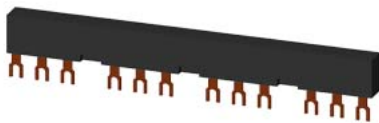

[Confirmation](#)



| Test Certificates | Marine / Shipping | | | |
|--|-------------------|--|--|--|
| Special Test Certificate Type Test Certificates/Test Report | | | | |
| other | | | | |
| Confirmation Environmental Confirmations | | | | |

| Further information |
|---|
| Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3RV1915-2CB Cax online generator |

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1915-2CB>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1915-2CB>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1915-2CB&lang=en

last modified:

2/9/2022 