





Flat Wire Transformer

FWPQ3225-4628-RC

Dimensions:  $\frac{\text{inch}}{\text{mm}}$

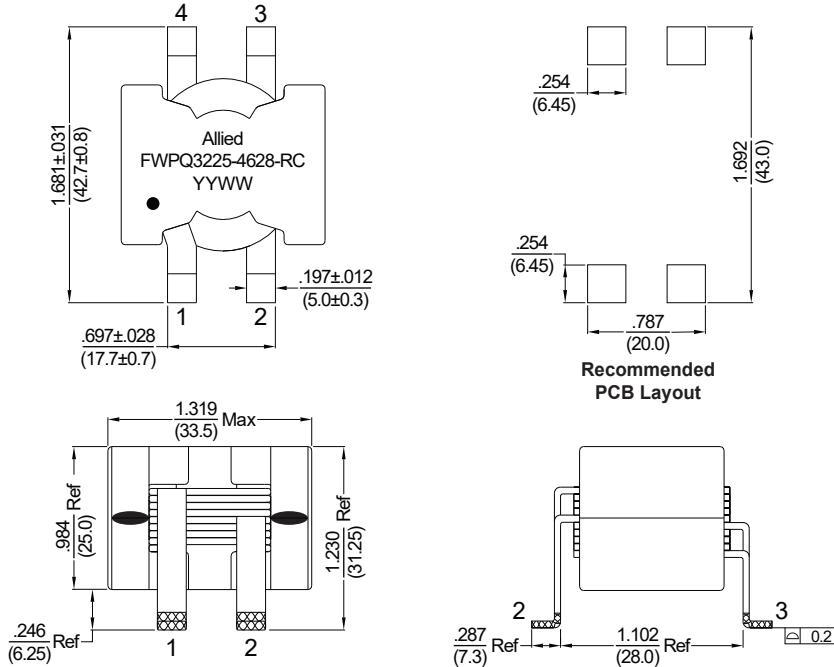


Allied Part Number	Primary Inductance ±20% (µH)	Test Frequency KHz, 0.25V	Turns Ratio @15.75KHz 1.0V ± 5%	DCR (mΩ) Max		HI-POT 2mA / 3Sec
			(1-2) : (3-4)	(1-2)	(3-4)	Wdg-Wdg
FWPQ3225-4628-RC	360	10	2 : 1	2.6	1.4	1000VDC

All specifications subject to change without notice.

**Features**

- Flat Wire SMD Power Transformer
- Low DCR
- High Saturation Current
- Class F Wire

**SCHEMATIC**



**Electrical**

- Inductance Range: 360µH
- Tolerance: 20%
- Test Frequency: 10KHz, 0.25V
- Operating Temp: -40°C to +125 °C

**Physical**

- Packaging: 168 pcs per Carton
- Marking: Part Number and Date Code