


DLA-12D3



- Hybrid SAD-GDT Technology
- UL497B LISTED
- 20kA I_{max} (1x-8/20us)
- 5kA I_{imp} (2x-10/350us)
- 5kA I_n (10x-8/20us)
- Modular
- 2W+SHIELD+G

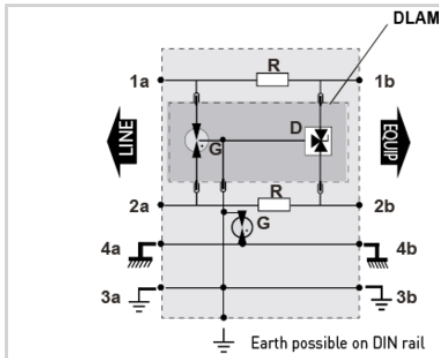

Electrical Characteristics

Insertion loss		< 1 dB
Max. load current	IL	300 mA
Impulse current 2 x 10/350µs Test - D1 Category	I _{imp}	5 kA
Nominal discharge current C2 Category	I _n	5 kA
DATA SPD TYPE		UL497B LISTED
VOLTS	(V)	12
WIRES		RJ11 Connector
LINE CURRENT MAX	(A)	0.3
AMBIENT MIN	(C)	-50
AMBIENT MAX	(C)	+85
RESIDUAL VOLTAGE	(V)	30
MCOV	(V)	15/72/72
IN10 impulses 8/20µs	(kA)	2.5
IMAX8/20µs	(kA)	20
I _{imp} 10/350µs	(kA)	5
DATA SPEED	(bps)	up to 10MHz
FREQUENCY	(MHz)	up to 10
INSERTION LOSS (@ FREQ)	(db)	< 1
CAPACITANCE	(pF)	< 50

Mechanical Characteristics

TECHNOLOGY		SAD-GDT
NETWORK CONFIGURATION		1 pair
CONNECTION METHOD		Screw terminal
MOUNTING		Din rail
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
DIMENSIONS		See diagram
WEIGHT		0.30 lbs
SPARE PART		DLAM-12D3

Standards

Certification		UL479A
UL STANDARD		UL497B
UL CATEGORY		QVGQ
UL FILE NUMBER		E184939
STANDARDS		IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS

Part number

6402011