

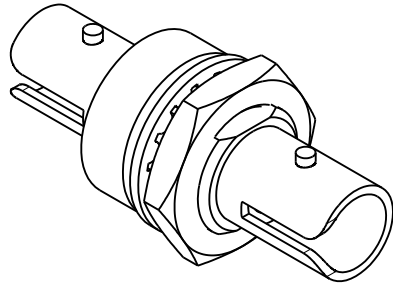
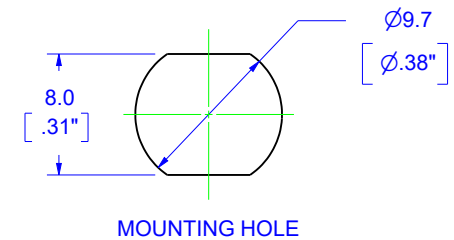


© COPYRIGHT 2021 BY INDUSTRIAL FIBER OPTICS, INC.
ALL RIGHTS RESERVED.

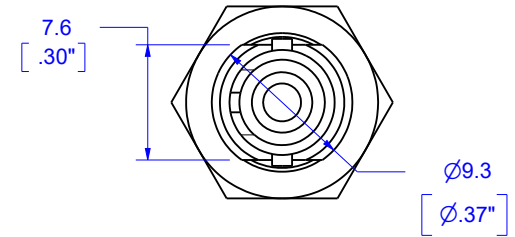

REVISIONS					
REV	DESCRIPTION	ECO	DATE	DWN	APVD
A	Initial release		1/4/2013	BB	AR
B	Changed split sleeve specification from phosphor bronze	00390	3/23/2021	BB	DH

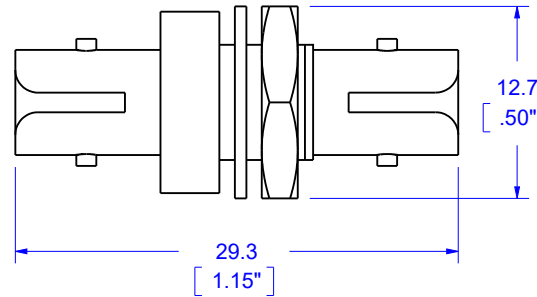


NOTES:

- 20° C to 60° C operating temperature.
- Suitable for mating any multimode ST terminations.
- Nickel plated brass body, washer and nut.
- Zirconia sleeve.
- Polyvinyl chloride (PVC) dust caps.
- TIA 604.2 (FOCIS 2) compatible.

California Proposition 65 Warning:
This product contains lead, and may contain Bis(2-Ethylhexyl) phthalate (DEHP), Benzyl butyl phthalate (BBP), Dibutyl phthalate (DBP), and Diisobutyl phthalate (DIBP). These chemicals are listed by the California OEHHA and/or European Chemicals Agency as causing cancer, birth defects, or other reproductive harm.

This product is not EU RoHS or REACH compliant.



METRIC

INCLUDES HEX NUT, LOCK WASHER AND TWO (2) POLYVINYL CHLORIDE DUST CAPS

UNLESS OTHERWISE SPECIFIED DIMENSIONS MILLIMETERS [IN.]	PRODUCT	Industrial Fiber Optics TEMPE, AZ 85281			
	MATERIAL				
DIMENSIONS ARE FOR REFERENCE ONLY NO TOLERANCES MAY BE IMPLIED FROM THIS DOCUMENT	FINISH	Bright Nickel	NAME		
	DRAWN BY	B. Bidwell	ST Mating Sleeve		
	DATE	1/4/2013			
	CHECKED BY	A. Reyes	SIZE	SCALE	DOCUMENT NUMBER
	DATE	1/4/2013	A	1:1	IF 820063
					REV
				B	
		DO NOT SCALE DRAWING		1 OF 1	