

- Small Size & Lightweight
- PCB Board Mountable
- Low Cost
- Universal Input Voltage
- RoHS Compliant

KPS Series

5 to 15W AC-DC

Board Mount Power Supplies

Key Market Segments & Applications

- Factory Automation
- Telecom
- Datacom
- Printers and motor drives
- Instruments

KPS Features and Benefits

Features

- Small Size
- Wide Input Range
- No External Components Needed

Benefits

- Minimises PCB Space
- Global use with no manual intervention
- Easy to use

Specifications		KPS-5	KPS-10	KPS-15
ITEMS	MODEL			
Input Voltage range		85 - 264VAC (47 - 440Hz) or 110 - 370VDC		
Inrush Current (115 / 230VAC)	A		20 / 40	
Input Current (115/230VAC)	A	0.13 / 0.07	0.27 / 0.13	0.4 / 0.2
Temperature Coefficient			±0.05%/°C	
Voltage Accuracy			±1%	
Minimum Load	A		None	
Load Regulation			±1% (10% to 100% load)	
Line Regulation (1)			±0.5%	
Ripple & Noise (2)	mV		1% or 50mV whichever is greater	
Short Circuit Protection	-		Continuous - hiccup mode	
Overvoltage Protection	V		130-150%	
Hold Up Time (Typ@115VAC)	ms	8	16	16
LED Indicator			Green LED = OK	
Operating Temperature			0 to +70°C with derating	
Storage Temperature			-20 to +85°C	
Humidity (non condensing)			10 - 95% RH	
Cooling			Convection	
Withstand Voltage			Input to Output 3kVAC	
Vibration (non operating)		23.52m/s ² (10 - 55Hz: constant sweep 1 min X, Y, Z for 1 hour)		
Shock		< 196.1 m/s ² (20G)		
Safety Agency Approvals	-	UL60950-1, CSA60950-1, EN60950-1 Class II, CE Mark		
Conducted & Radiated EMI		EN55022-B, FCC Class B		
Immunity		EN61000-4 -2, -3, -4, -5, -6		
Weight (Typ)	g	29g	60g	80g
Size (WxLxH; H above pcb)	mm	55 X 35 X 20	64 X 45 X 23	70 X 48 X 23
Warranty		2 Year		


Notes:

(1) KPS-5 Measured from 100 - 240VAC (2) Measured with 0.1uF ceramic & 10uF electrolytic at 20MHz BW


Model Selector

Model	Output Voltage (V)	Maximum Output (A)	Peak Load (A)	Output Pwr (W)	Eff (typ)%
KPS5-3R3	3.3	1.25	-	4.1	70
KPS5-5	5.0	1.00	-	5.0	70
KPS5-12	12.0	0.42	-	5.0	70
KPS5-15	15.0	0.33	-	5.0	70
KPS5-24	24.0	0.23	-	5.5	77
KPS10-3R3	3.3	2.50	3.80	8.3	65
KPS10-5	5.0	2.00	2.80	10.0	70
KPS10-12	12.0	0.84	1.20	10.1	75
KPS10-15	15.0	0.67	1.00	10.1	75
KPS10-24	24.0	0.42	0.65	10.1	78
KPS15-3R3	3.3	3.00	4.50	9.9	70
KPS15-5	5.0	3.00	4.50	15.0	73
KPS15-12	12.0	1.25	1.80	15.0	80
KPS15-15	15.0	1.00	1.50	15.0	80
KPS15-24	24.0	0.63	0.95	15.1	82


Derating Curve KPS Series

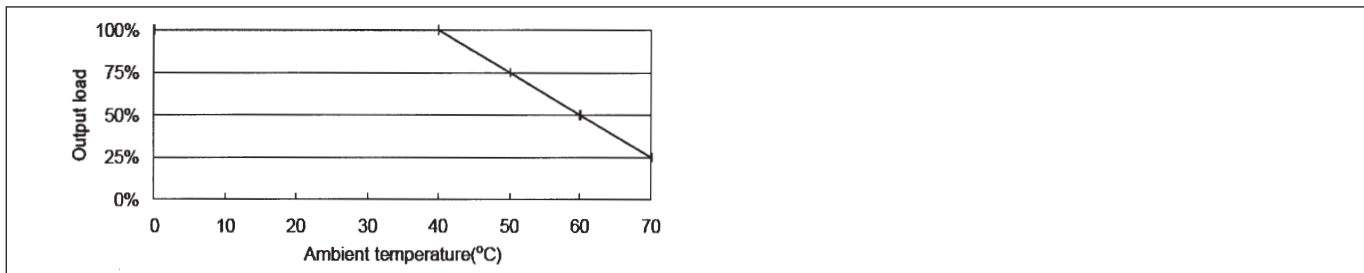


Outline Drawing KPS5 Series

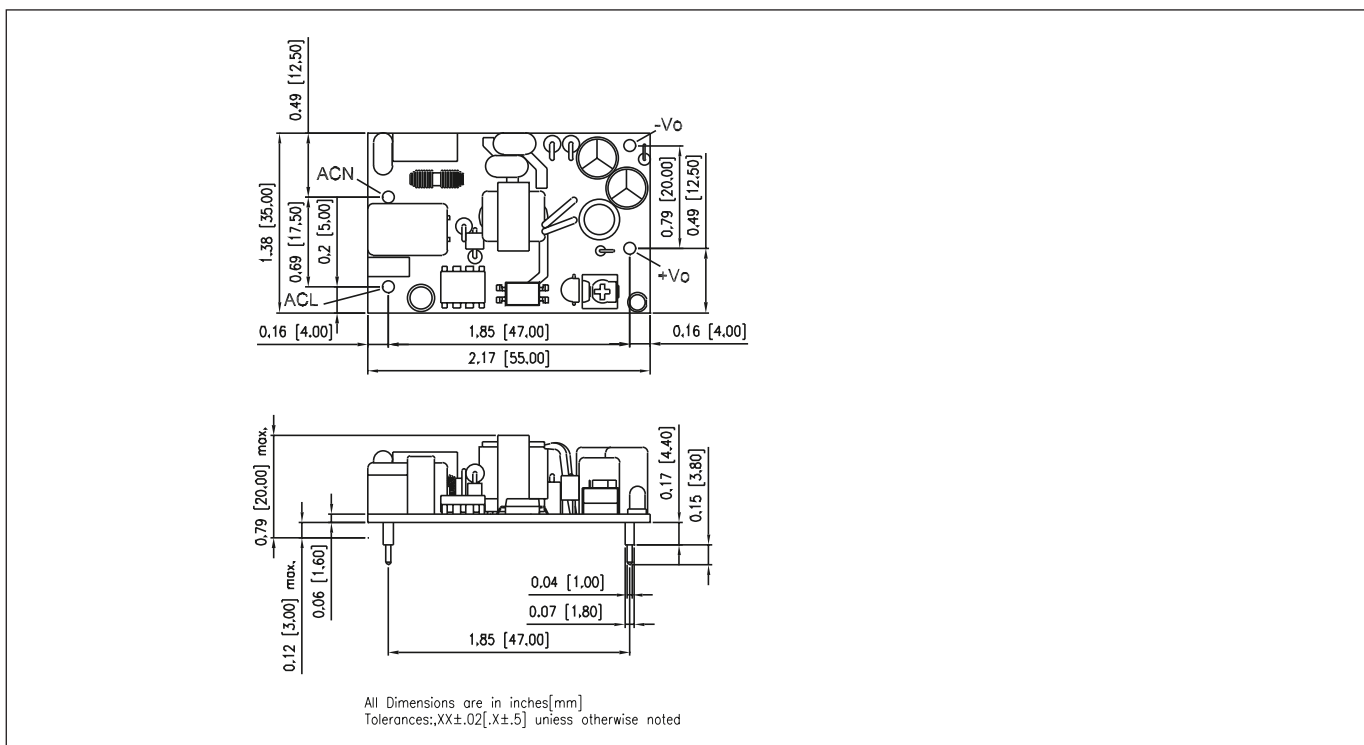

Outline Drawing KPS10 Series

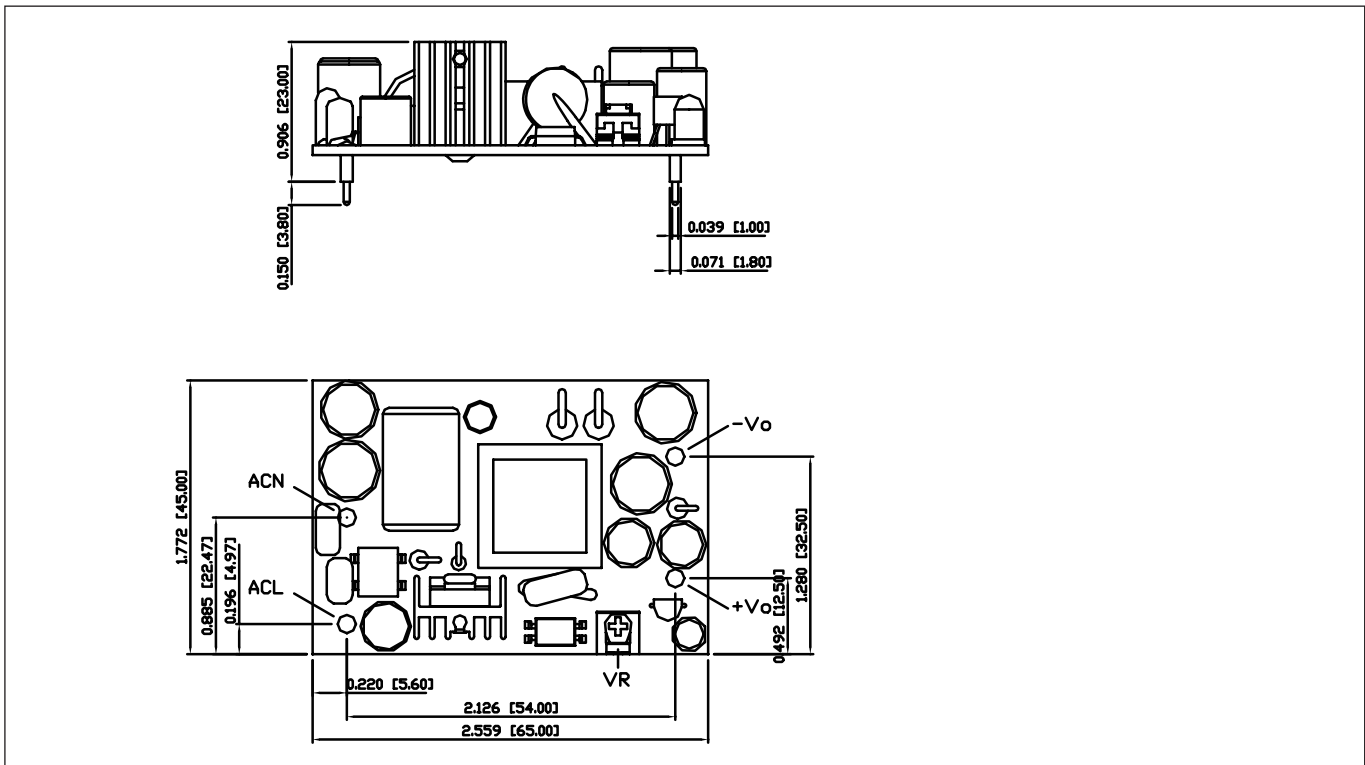

Outline Drawing KPS15 Series

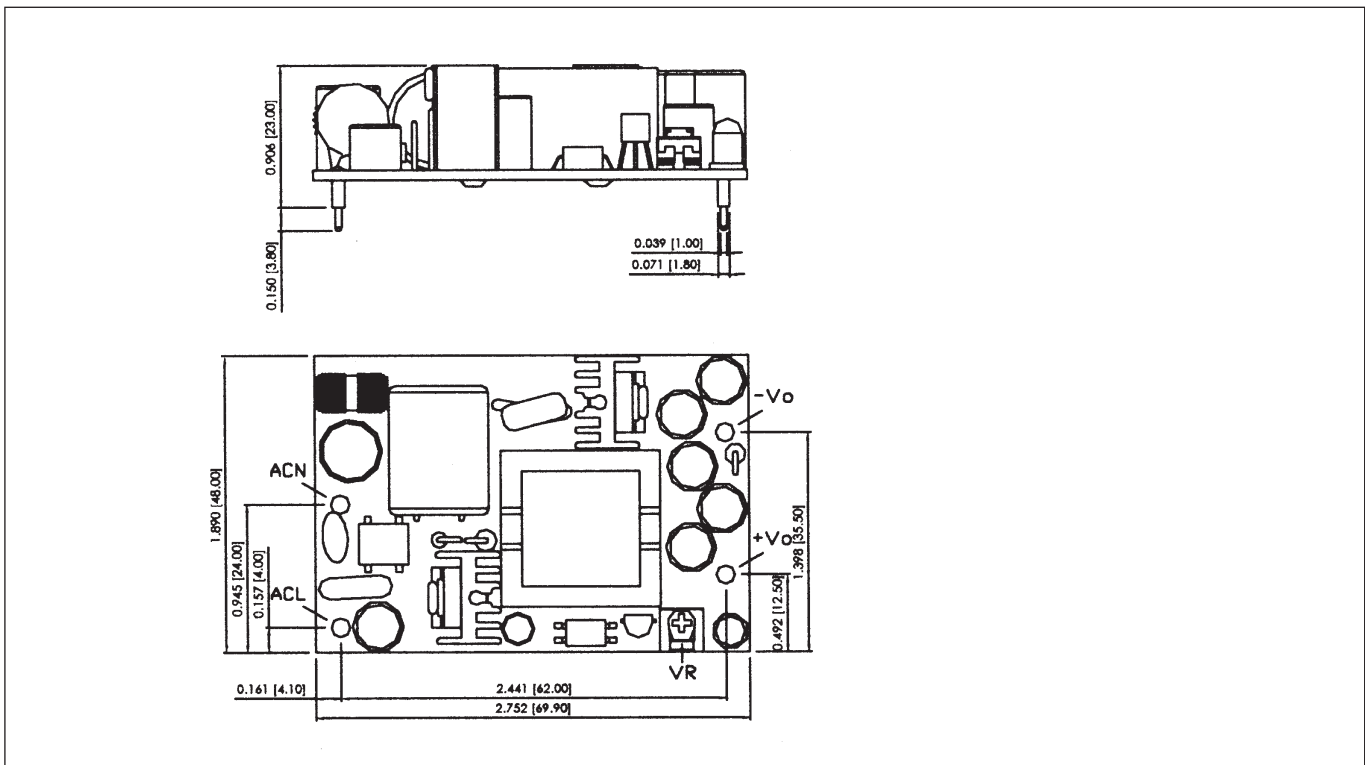



TDK-Lambda France SAS

Tel: +33 1 60 12 71 65
 tlf.fr.powersolutions@tdk.com
 www.emea.lambda.tdk.com/fr



Italy Sales Office

Tel: +39 02 61 29 38 63
 tlf.it.powersolutions@tdk.com
 www.emea.lambda.tdk.com/it



Netherlands

tlf.nl.powersolutions@tdk.com
 www.emea.lambda.tdk.com/nl



TDK-Lambda Germany GmbH

Tel: +49 7841 666 0
 tlg.powersolutions@tdk.com
 www.emea.lambda.tdk.com/de



Austria Sales Office

Tel: +43 2256 655 84
 tlg.at.powersolutions@tdk.com
 www.emea.lambda.tdk.com/at



Switzerland Sales Office

Tel: +41 44 850 53 53
 tlg.ch.powersolutions@tdk.com
 www.emea.lambda.tdk.com/ch



Nordic Sales Office

Tel: +45 8853 8086
 tlg.dk.powersolutions@tdk.com
 www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66
 tlu.powersolutions@tdk.com
 www.emea.lambda.tdk.com/uk



TDK-Lambda Ltd.

Tel: +9 723 902 4333
 tli.powersolutions@tdk.com
 www.emea.lambda.tdk.com/il-en



TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324
 tla.powersolutions@tdk.com
 www.us.lambda.tdk.com



TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599
 sales.br@tdk-electronics.tdk.com
 www.tdk-electronics.tdk.com/en



TDK-Lambda Corporation

Tel: +81-3-6778-1113
 www.jp.lambda.tdk.com



TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777
 tlc.powersolutions@tdk.com
 www.lambda.tdk.com.cn



TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211
 tfs.marketing@tdk.com
 www.sg.lambda.tdk.com



TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660
 mathew.philip@tdk.com
 www.sg.lambda.tdk.com

