
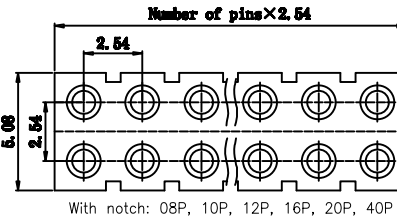


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/10/19	
A		UPDATE DRAWING	6/17/19	OW/RC
B		UPDATE DRAWING	10/14/19	OW/RC
C		UPDATE DRAWING	7/21/20	OW/RC
D		ADDED SPEC.	5/10/22	WX/TY



3.30mm Length

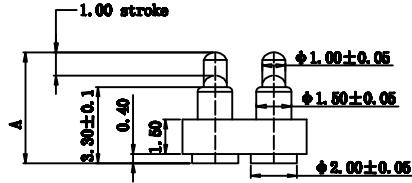

3.30mm Length
 Example: PH2-3B-08-MVF-3345 = 2X4 PIN

ADAM P/N	Initial Height
PH2-3B-XX-MVF-3345	4.5mm
PH2-3B-XX-MVF-3350	5.0mm



4.30mm Length

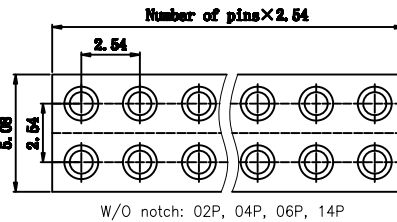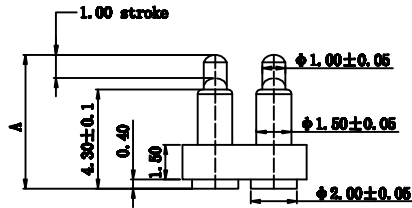

4.30mm Length
 Example: PH2-3B-08-MVF-4355 = 2X4 PIN

ADAM P/N	Initial Height
PH2-3B-XX-MVF-4345	4.5mm
PH2-3B-XX-MVF-4350	5.0mm
PH2-3B-XX-MVF-4355	5.5mm
PH2-3B-XX-MVF-4360	6.0mm

5.30mm Length

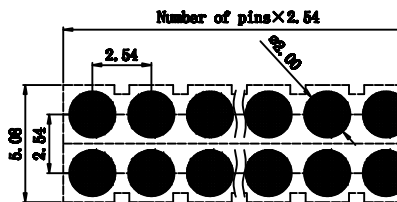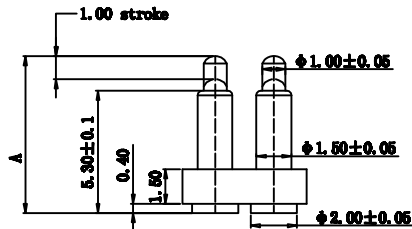

5.30mm Length
 Example: PH2-3B-08-MVF-5365 = 2X4 PIN

ADAM P/N	Initial Height
PH2-3B-XX-MVF-5365	6.5mm
PH2-3B-XX-MVF-5370	7.0mm
PH2-3B-XX-MVF-5375	7.5mm
PH2-3B-XX-MVF-5380	8.0mm

SPECIFICATIONS:

Material:
 Insulator: PA46, rated UL 94V-0, Color: Black
 Contacts: Copper Alloy
 Spring: Stainless Steel
 Plating:
 Gold flash over Nickel underplate overall
Electrical:
 Voltage rating: 12 Volts
 Current rating: 1A max (3.30mm), 3A max (4.30&5.30mm)
 Contact resistance @ working stroke: 20 mohms max. before test
 60 mohms max. after test
 Insulation resistance: 100 Mohms min
 Dielectric withstanding voltage: 100 VRMS @ 60HZ

Mechanical:
 Spring force: 90±20gf @ 1.0mm working stroke (3.30mm)
 70±20gf @ 1.0mm working stroke (4.30 & 5.30mm)
 Full stroke: 1.40mm
 Life test: 10,000 Cycles Min
 Temperature Rating:
 Operating temperature: -30°C to +85°C

Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED		
INCHES	HOLES	
.X ±.10	ØX	±.10
.XX ±.020	ØXX	±.015
.XXX ±.015	ØXXX	±.010
DRAWN	OW	5/10/19
CHECKED	AC	5/10/19
APPROVED		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH		

ADAM TECH 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE: CUSTOM LENGTH TUBE DOUBLE ROW STRIPS
 1.50MM INSULATOR HEIGHT, SMT LOADED

SIZE X	PART NO. PH2-3B-XX-MVF-XXXX	REV. D
REF: S00185C	SCALE: NTS	SHEET 1 OF 1