



Sensors > Position Sensors > LVDT/LVIT Sensors > GENERAL PURPOSE LVDT



Housing Diameter: 20.6 mm [.812 in]

Full Stroke Ranges: ± 12.7 mm [± 0.5 in]

Linearity: ± 0.25 % of Span

Linear Position Sensor - LVDT/LVIT Housing Material: **Stainless Steel**

Linear Position Sensor - LVDT/LVIT Form Factor: **Cylindrical**

[All GENERAL PURPOSE LVDT \(18\)](#)

Features

Electrical Characteristics

Linear Position Sensor - LVDT/LVIT Supply Voltage	3 V
Excitation Frequency	400 – 5000 Hz
Electrical Connections	Leads

Signal Characteristics

Excitation Frequency	.4 – 5 kHz
----------------------	------------

Body Features

Linear Position Sensor - LVDT/LVIT Form Factor	Cylindrical
Spring Loaded	Separate Core

Housing Features

Housing Diameter	20.6 mm [.812 in]
Linear Position Sensor - LVDT/LVIT Housing Material	Stainless Steel

Usage Conditions

Operating Temperature Range	-55 – 150 °C [-67 – 302 °F]
-----------------------------	-----------------------------

Industry Standards

IP Rating	IP61
Industry Standards	RoHS

Other

Full Stroke Ranges	±12.7 mm[±.5 in]
Linearity	±.25 % of Span

Product Compliance

For compliance documentation, visit the [product page on TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) SVHC > Threshold: Terphenyl hydrogenated (5% in Component) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.


Halogen Content	Not Yet Reviewed for halogen content
-----------------	--------------------------------------

Solder Process Capability	Not reviewed for solder process capability
---------------------------	--

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

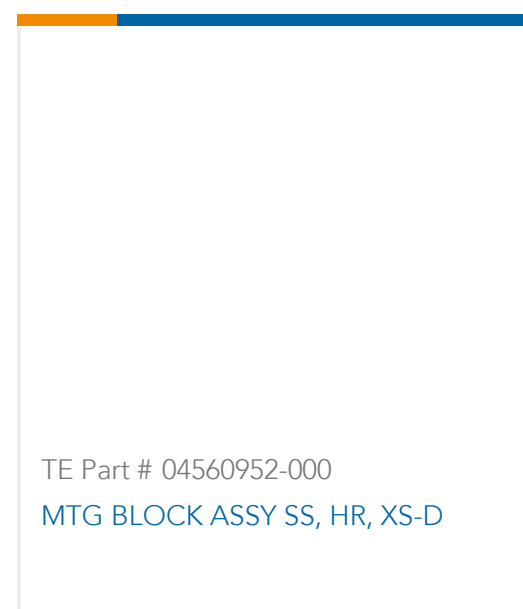

Also in the Series | HR



LVDT/LVIT Sensors(34)

Customers Also Bought



TE Part #02560390-000
GENERAL PURPOSE LVDT



TE Part #1462043-3
IME03GR=IM RELAY 140mW 5V 2NO



TE Part #3-1393253-4
W68-X2Q12-20=M6/M7/M9/W6/W7



TE Part #04171776-000
LVM-110 AMP/DEMODO BD ASSY



TE Part #02350510-000
GA-HD GCD-121-125 ASSY




TE Part #02560982-000
LVDT DC-EC 125 ASSY



TE Part #TAD14847101-002
M12D4-MS-MR-FRNC TYPE B GREEN-1.0M



TE Part #TAX38125102-002
RPC-M12X-MS-8CON-PUR-1.0SH

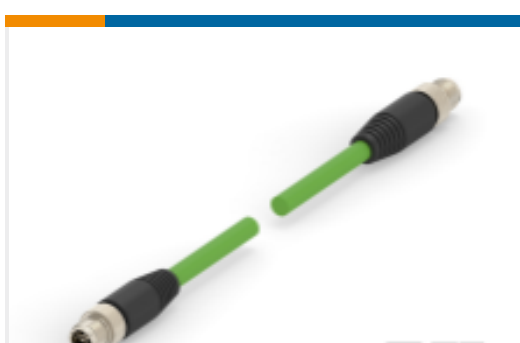

TE Part #TAX38725102-002
RPC-M12X-8MS-1.0SH-M12X-8MS-PUR

Documents

[Datasheets & Catalog Pages](#)

[General Purpose LVDT](#)

English