



Sensors > Position Sensors > RVDT/RVIT Sensors > AC RVDT FOR HARSH ENVIRONMENTS



Angular Position Sensor - RVDT/RVIT Type: **RVDT**

Angular Sensing Range: **±30 °**

Angular Position Sensor - RVDT/RVIT Supply Voltage: **3 Vrms**

Non-Linearity: **± .5 %**

Angular Position Sensor - RVDT/RVIT Output Type: **AC Voltage**

[All AC RVDT FOR HARSH ENVIRONMENTS \(5\)](#)

Features

Product Type Features

Angular Position Sensor - RVDT/RVIT Type	RVDT
--	------

Configuration Features

Electrical Connection	6-Pin Connector
-----------------------	-----------------

Electrical Characteristics

Angular Position Sensor - RVDT/RVIT Supply Voltage	3 Vrms
Angular Position Sensor - RVDT/RVIT Output Type	AC Voltage

Signal Characteristics

Excitation Frequency	2.5 – 10 kHz
----------------------	--------------

Body Features

	Varies oz
Angular Sensing Range	±30 °
Angular Position Sensor - RVDT/RVIT Weight	255 g
Case Material	Stainless Steel

Mechanical Attachment

Angular Position Sensor - RVDT/RVIT Mounting	Size 15 Servo Mount
--	---------------------

Dimensions

Shaft Diameter	4.75 mm[.187 in]
----------------	------------------

Case Diameter	38.1 mm[1.5 in]
---------------	-----------------

Usage Conditions

Operating Temperature Range	-55 – 150 °C[-67 – 300 °F]
-----------------------------	----------------------------

Other

Non-Linearity	± .5 %
---------------	--------

Bearing Type	ABEC 3 Precision Ball Bearing
--------------	-------------------------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Not Yet Reviewed
-----------------------------	------------------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	<p>Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Dodecamethylcyclhexasiloxane (D6) (.26% in component part) Decamethylcyclopentasiloxane (D5) (.12% in component part)</p> <p>Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.</p>
--	--

Halogen Content	Not Yet Reviewed for halogen content
-----------------	--------------------------------------

Solder Process Capability	Not reviewed for solder process capability
---------------------------	--


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>




Compatible Parts



Also in the Series | MEAS R36AS

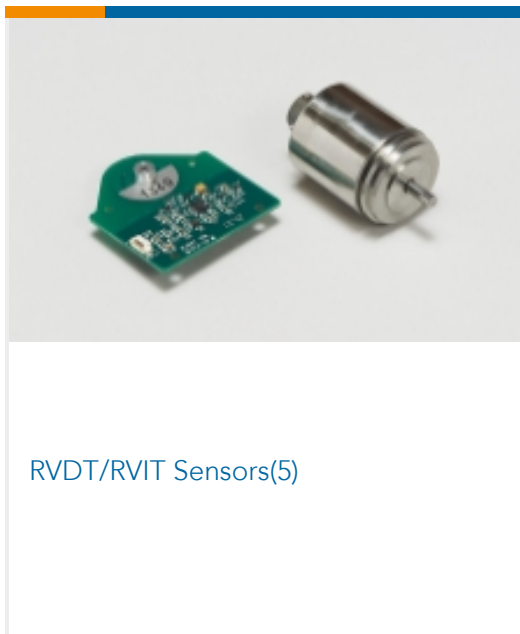

Customers Also Bought

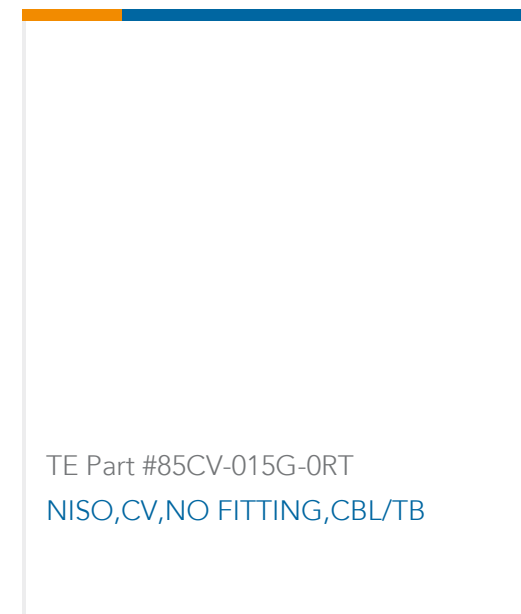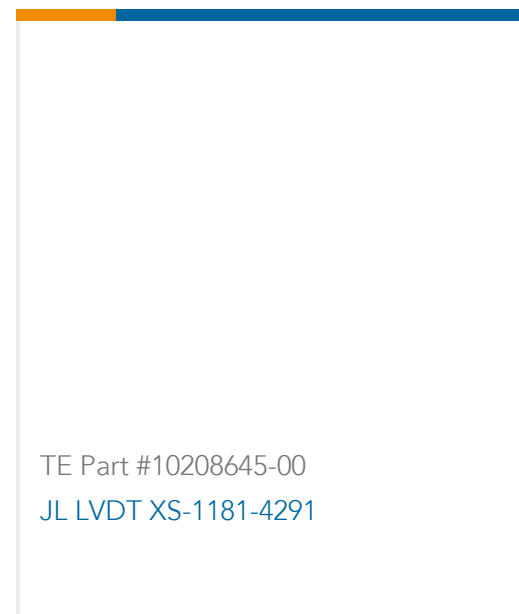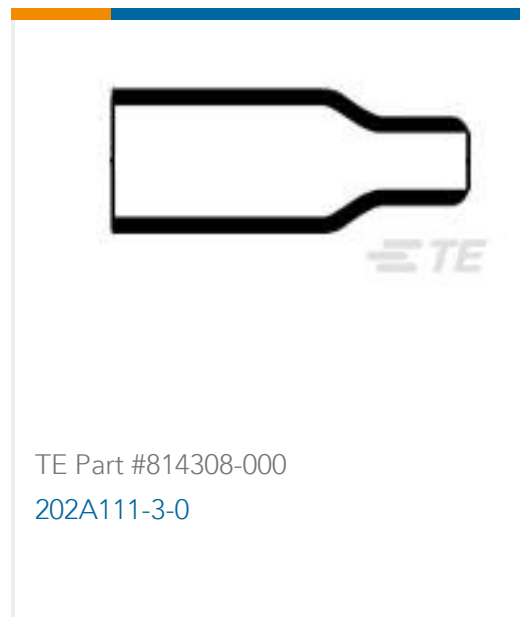



Documents

Datasheets & Catalog Pages

AC Operated RVDT for Harsh Environments

English