

1-100605-2 ✓ ACTIVE


TE Internal #: 1-100605-2

Quick Disconnects, Receptacle, 14 – 18 AWG Wire Size, 1 – 2.5 mm² Wire Size, 1900 – 2974 CMA Wire Size, Mating Tab Width 6.35 mm [.25 in], Straight

[View on TE.com >](#)



Terminals & Splices > Quick Disconnects

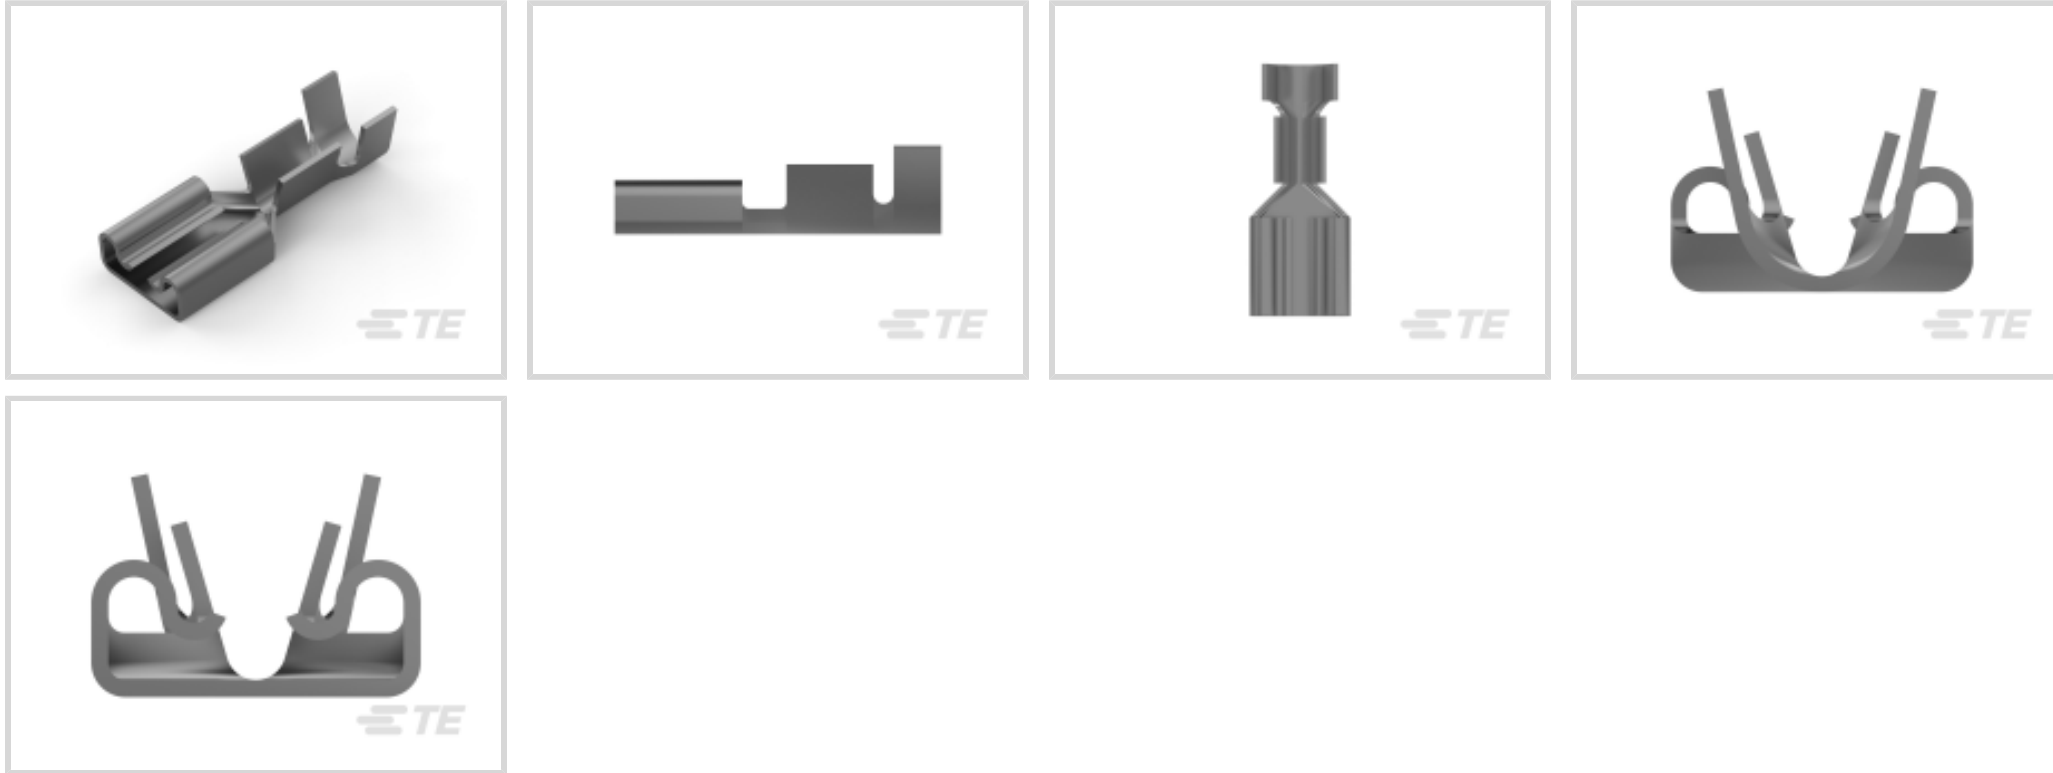

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **1900 – 2974 CMA**

Mating Tab Width: **6.35 mm [.25 in]**

Features

Product Type Features

Insertion Force	Low
-----------------	-----

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Electrical Characteristics

Voltage Rating	600 V
----------------	-------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm [.25 in]
Mating Tab Thickness	.81 mm [.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Extraction Force	1.5 kgf
------------------	---------

Wire Insulation Support	With
-------------------------	------

Mating Retention Type	Dimple
-----------------------	--------

Dimensions

Terminal Material Thickness	.41 mm[.016 in]
-----------------------------	-----------------

Product Length	21.4 mm
----------------	---------

Compatible Insulation Diameter Range	3. – 4.5 mm
--------------------------------------	-------------

Wire Size	1900 – 2974 CMA
-----------	-----------------

Usage Conditions

Insulation Option	Uninsulated
-------------------	-------------

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Packaging Features

Packaging Quantity	5000
--------------------	------

Packaging Method	Reel
------------------	------

Other

Line	Standard
------	----------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
--	---

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2150234-1
OCEAN_2.0_APPLICATOR-E-110F180F



TE Part # 2150234-2
OCEAN_2.0_APPLICATOR-E-110F180F



TE Part # 7-2150234-1
OCEAN_2.0_APPLICATOR-E-110F180F



TE Part # 7-2150234-2
OCEAN_2.0_APPLICATOR-E-110F180F



KIT

TE Part # 7-2150234-7
OCEAN_2.0_SPARE_PART_KIT-110F180F



TE Part # 2-2150234-2
OCEAN_2.0_APPLICATOR-E-110F180F


Customers Also Bought



TE Part #5-2232263-4
PTL 1X4 CAP PANEL MT GLW WIRE KEY A DGR




TE Part #926790-6
PL 250 REC TERMINAL-FLAG 17-13 TPBR

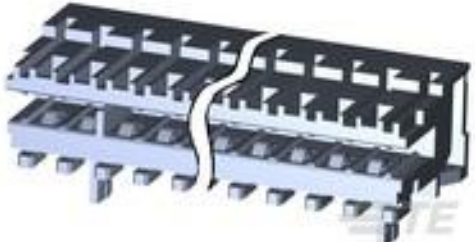

TE Part #3-1534796-5
AMP DUOPLUG MK2 CONNECTOR 5P



TE Part #926984-1
STD TIMER CONTACT

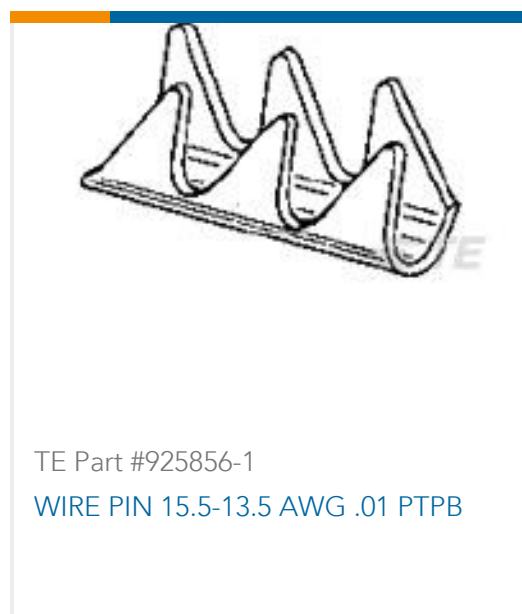

Documents

Product Drawings

[250 FASTON,REC.,14-17AWG,PTPB](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_1-100605-2_J.2d_dxf.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_1-100605-2_J.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-100605-2_J.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

Product Environmental Compliance

[MD_1-100605-2_06062015322_dmtec](#)

English

[MD_1-100605-2_06062015322_dmtec](#)

English

1-100605-2

Quick Disconnects, Receptacle, 14 – 18 AWG Wire Size, 1 – 2.5 mm² Wire Size, 1900 – 2974 CMA Wire Size, Mating Tab Width 6.35 mm [.25 in], Straight

