



Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings



Connector Product Type: **Housing**

Connector & Housing Type: **Receptacle**

Connector System: **Wire-to-Board**

Number of Positions: **13**

Centerline (Pitch): **2.54 mm [ .1 in ]**

Features

Product Type Features

|                                   |               |
|-----------------------------------|---------------|
| Connector Product Type            | Housing       |
| Connector & Housing Type          | Receptacle    |
| Connector System                  | Wire-to-Board |
| Sealable                          | No            |
| Connector & Contact Terminates To | Wire & Cable  |

Configuration Features

|                     |    |
|---------------------|----|
| Number of Positions | 13 |
| Number of Rows      | 1  |

Electrical Characteristics

|                                       |         |
|---------------------------------------|---------|
| Dielectric Withstanding Voltage (Max) | 600 VAC |
| Insulation Resistance                 | 5000 MΩ |
| Operating Voltage                     | 267 V   |

Body Features

|                       |       |
|-----------------------|-------|
| Primary Product Color | Black |
|-----------------------|-------|

Contact Features

|                                  |        |
|----------------------------------|--------|
| Contact Retention Within Housing | With   |
| Contact Layout                   | Inline |
| Contact Type                     | Socket |



|                              |     |
|------------------------------|-----|
| Contact Current Rating (Max) | 3 A |
|------------------------------|-----|

Termination Features

|                                    |                                      |
|------------------------------------|--------------------------------------|
| Termination Method to Wire & Cable | Crimp, Insulation Displacement (IDC) |
|------------------------------------|--------------------------------------|

Mechanical Attachment

|               |         |
|---------------|---------|
| Strain Relief | Without |
|---------------|---------|

|                                       |               |
|---------------------------------------|---------------|
| Contact Retention Type Within Housing | Locking Lance |
|---------------------------------------|---------------|

|                     |         |
|---------------------|---------|
| Panel Mount Feature | Without |
|---------------------|---------|

|                     |         |
|---------------------|---------|
| PCB Mount Retention | Without |
|---------------------|---------|

|                       |       |
|-----------------------|-------|
| Mating Retention Type | Latch |
|-----------------------|-------|

|                  |      |
|------------------|------|
| Mating Retention | With |
|------------------|------|

|                         |                            |
|-------------------------|----------------------------|
| Connector Mounting Type | Cable Mount (Free-Hanging) |
|-------------------------|----------------------------|

Housing Features

|                  |               |
|------------------|---------------|
| Housing Material | Thermoplastic |
|------------------|---------------|

|                    |                |
|--------------------|----------------|
| Centerline (Pitch) | 2.54 mm[.1 in] |
|--------------------|----------------|

Dimensions

|                  |                    |
|------------------|--------------------|
| Connector Length | 32.97 mm[1.298 in] |
|------------------|--------------------|

|                  |                  |
|------------------|------------------|
| Connector Height | 6.73 mm[.265 in] |
|------------------|------------------|

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -65 – 105 °C[-85 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |        |
|---------------------|--------|
| Circuit Application | Signal |
|---------------------|--------|

Industry Standards

|                  |                               |
|------------------|-------------------------------|
| Glow Wire Rating | Standard Part - Not Glow Wire |
|------------------|-------------------------------|

|                        |          |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

Packaging Features

|                    |     |
|--------------------|-----|
| Packaging Quantity | 500 |
|--------------------|-----|

|                  |     |
|------------------|-----|
| Packaging Method | Bag |
|------------------|-----|

Other

|                                 |                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------|
| Discrete Wire Connector Comment | Refer to AMPMODU contacts for crimp snap-in replacement receptacle or pin contacts. |
|---------------------------------|-------------------------------------------------------------------------------------|



Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2023 (235)<br>Candidate List Declared Against: JUNE 2023 (235)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.                                                                                  |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                    |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

|                                                               |                                                             |                                                               |                                                               |
|---------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------------|
| <br>TE Part # 1-104479-0<br>SHORT POINT CONT 30 DPLX STMPD LF | <br>TE Part # 104479-9<br>SHORT POINT CONT 15 DPLX STMPD LF | <br>TE Part # 1-104480-3<br>SHORT POINT CONT 30 DPLX STMPD LF | <br>TE Part # 104479-8<br>SHORT POINT CONT PLTD SN            |
| <br>TE Part # 1-104480-2<br>SHORT POINT CONT 15 DPLX STMPD LF | <br>TE Part # 1-103653-2<br>13 MTE SHRD PIN HSG SR LATCH    | <br>TE Part # 1-104481-1<br>SHORT POINT CONT 30 DPLX STMPD LF | <br>TE Part # 1-104481-0<br>SHORT POINT CONT 15 DPLX STMPD LF |



TE Part # 1977162-2  
13 MTE HDR SRRA SMT.100CL w/o H-Downs

Also in the Series | AMPMODU MTE

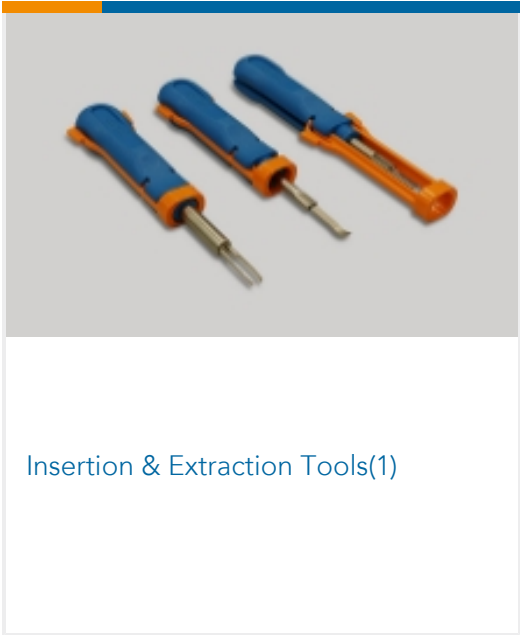

Insertion & Extraction Tools(1)




PCB Connector Shrouds(40)




PCB Headers & Receptacles(763)




Ribbon Connector Accessories(1)

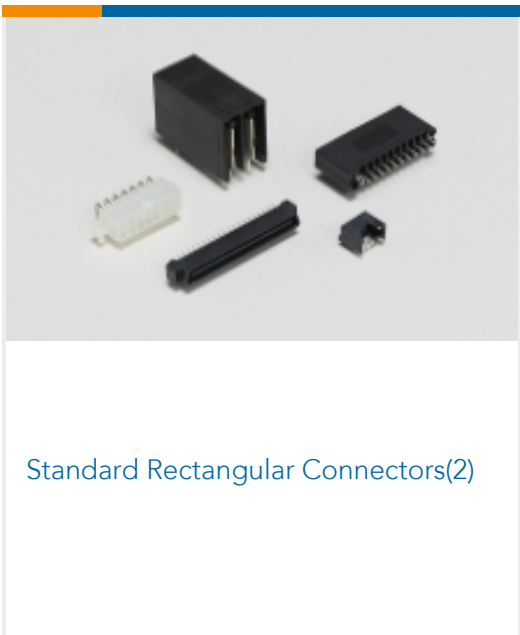

Standard Rectangular Connectors(2)

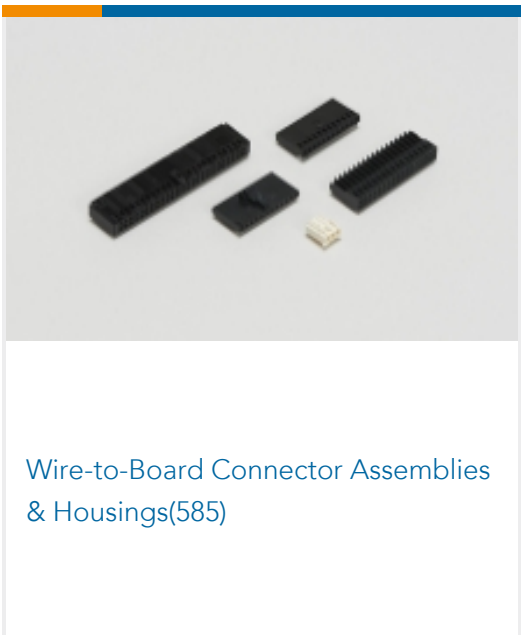


Wire-to-Board Connector Assemblies & Housings(585)

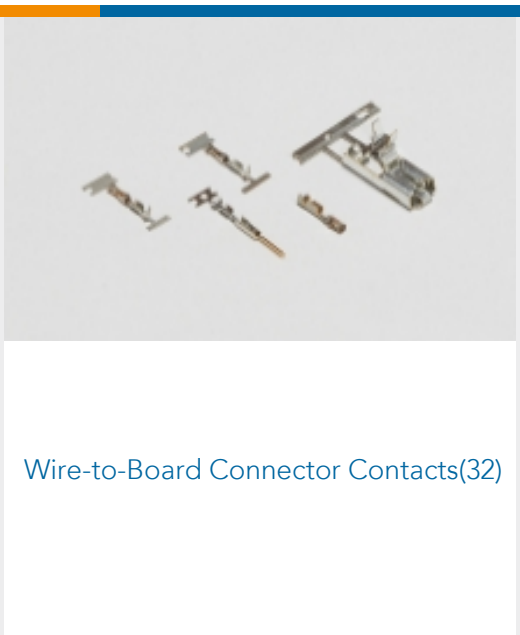

Wire-to-Board Connector Contacts(32)

Customers Also Bought

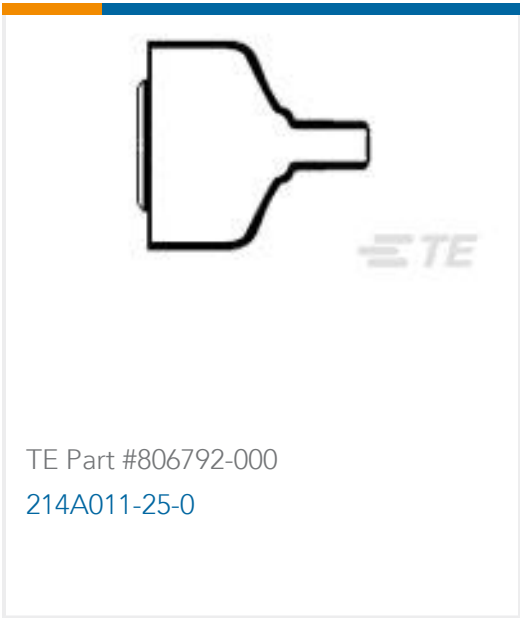

TE Part #806792-000  
214A011-25-0




TE Part #5-1676123-7  
1/2W SM M/OX 5% 180R



TE Part #2-6609104-4  
PE0S0DS6B=C1255




TE Part #F886364001  
VERSAFLEX-FR-3/8-09-SP

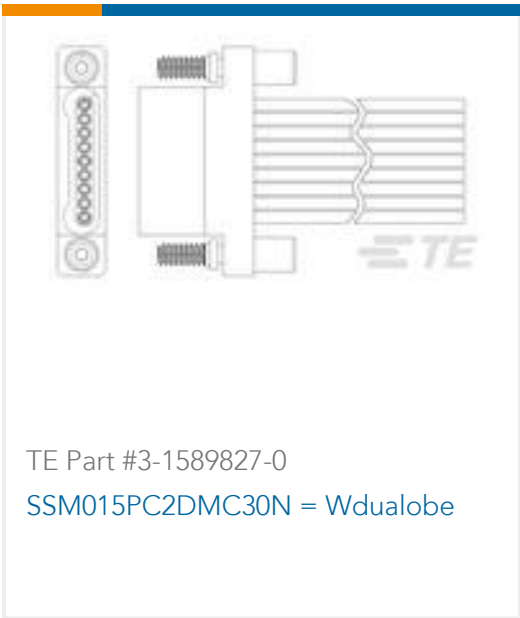

TE Part #3-1589827-0  
SSM015PC2DMC30N = Wdualobe



TE Part #5745653-1  
DIECAST STRAIN RELIEF KIT,SZ 3

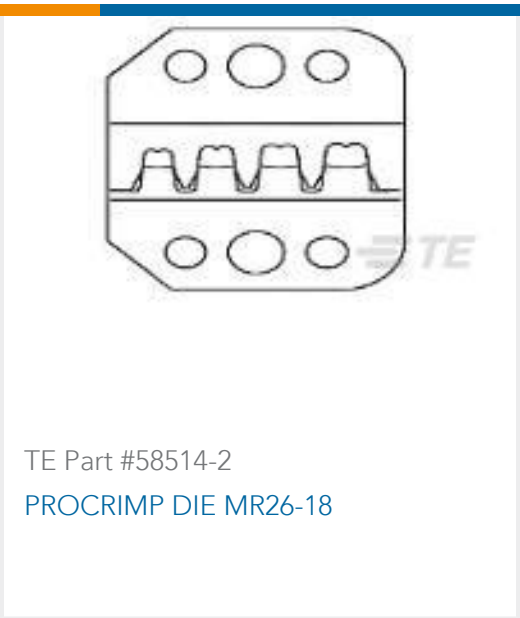

TE Part #58514-2  
PROCrimp DIE MR26-18



TE Part #203816-5  
PIN CONTACT ASSY,STRIP



Documents

Product Drawings

13 MTE RCPT HSG SR LATCH .100

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1-104257-2\_AH.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-104257-2\_AH.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-104257-2\_AH.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

AMP MODU MTE Section of Catalog 1307819

English

AMPMODU\_INTERCONNECTION\_SYSTEM\_SECTION5\_CONT

English

AMPMODU MTE INTERCONNECT SYSTEM

English

Product Specifications

Application Specification

English

Product Environmental Compliance

TE Material Declaration

English