# 1-1456426-1 ACTIVE

#### MCON Interconnection System

TE Internal #: 1-1456426-1

Housing for Female Terminals, Wire-to-Wire / Wire-to-Device / Wire-to-Board, 4 Position, .157 in [4 mm] Centerline, MCON

Interconnection System

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings



Connector System: Wire-to-Board, Wire-to-Device, Wire-to-Wire

Number of Positions: 4

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 4 mm [ .157 in ]

Sealable: Yes

#### **Features**

#### **Product Type Features**

rioduct Type reatures	
Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Board, Wire-to-Device, Wire-to- Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Configuration Features	
Number of Positions	4
Number of Rows	1
Body Features	
Primary Product Color	Black
Connector & Keying Code	A

1.2mm

Receptacle

1.2 mm[.047 in]

#### **Mechanical Attachment**

Mating Tab Width

Contact Size

Contact Type



Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PA GF
Centerline (Pitch)	4 mm[.157 in]
Dimensions	
Connector Height	17.5 mm[.689 in]
Product Width	26.5 mm[1.043 in]
Product Length	24.7 mm[.972 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C, 140 °C, 145 °C, 150 °C[158 °F][167 °F][176 °F] [185 °F][194 °F][212 °F][221 °F][230 °F][248 °C][257 °F][266 °F][284 °F][293 °F][302 °F]
Operating Temperature Range	-40 – 150 °C[-40 – 302 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Degree of Protection	IP67
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235)



Candidate	List Declared	Against:	JUNE
2022 (225)			

2023 (235)

Does not contain REACH SVHC

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC

Free


Solder Process Capability

Not applicable for solder process capability


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

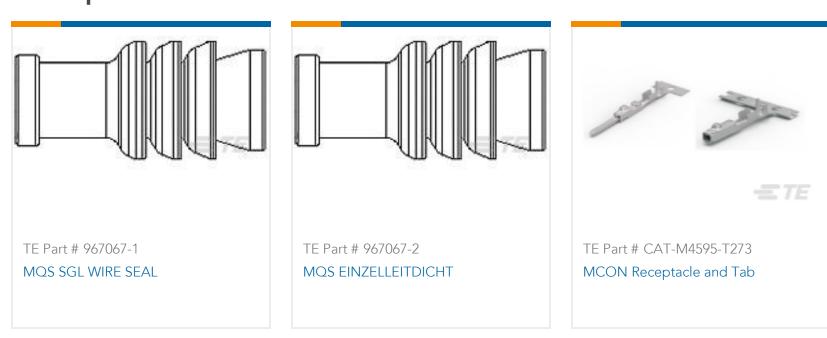

# Also in the Series | MCON Interconnection System

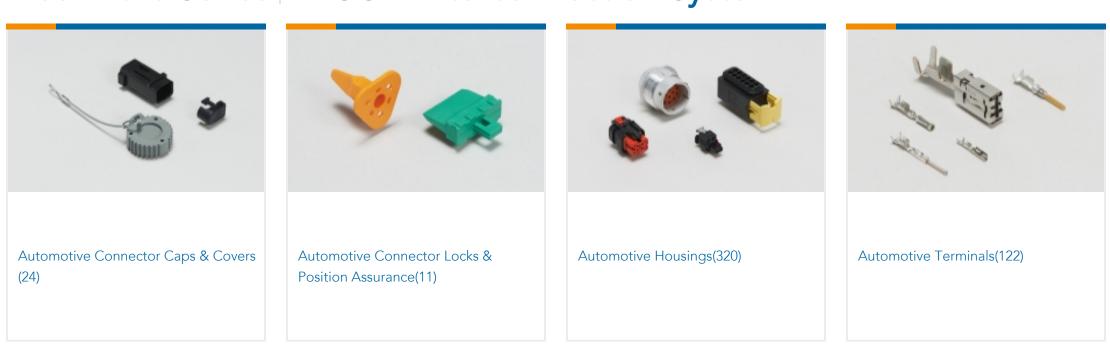





Connector Seals & Cavity Plugs(10)



Insertion & Extraction Tools(31)



Other Automotive Connector Accessories(2)



PCB Headers & Receptacles(2)

# Customers Also Bought



TE Part #776539-1 AS 16, 12P CAP ASSY, RD, KEY 1



TE Part #208480-1 CMC PLUG ASSEMBLY,SZ 28



TE Part #T4171010404-001
M12,REAR MOUNTING,MALE,B,4P,0.2
M WIRE



TE Part #1924292-5 6POS, MCON 1.2 CB REC 2p TL SEALED



TE Part #T4110411041-000 M12 F, 4P GOLD B\_CODE S SHIELDED PG7



TE Part #1452299-1 FEM HSG INLI.ASY12P



TE Part #1418850-3 MCON 1.2 CB REC SWS AG



TE Part #184012-1 2 POS. PLUG ASSY, KEY G, GRAY



64P ECU PLUG CONNECTOR

TE Part #1010-040-0806 SEAL, INTF, 8P, RED-ORG, DTM

## **Documents**

## **Product Drawings**

4POS, MCON 1.2 CB REC 2p TL SEALED

English

## **CAD Files**

**Customer View Model** 

ENG\_CVM\_CVM\_1-1456426-1\_B.2d\_dxf.zip

English

3D PDF



3D

**Customer View Model** 

ENG\_CVM\_CVM\_1-1456426-1\_B.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1-1456426-1\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

## Datasheets & Catalog Pages

MCON Interconnection System

English

**Instruction Sheets** 

Instruction Sheet (U.S.)

English

Instruction Sheet (U.S.)

English