



OEG | OEG Miniature PCB Relay OJT

TE Internal #: 1-1461116-5

Power Relays, Standard, Monostable, DC, 450 mW Coil Power

Rating DC, 1280  $\Omega$  Coil Resistance, UL Coil Insulation Class F, OEG

Miniature PCB Relay OJT

[View on TE.com >](#)

Relays, Contactors & Switches > Relays > Power Relays > STD OEG PCB OSA Power Relays



Power Relay Type: **Standard**

Coil Magnetic System: **Monostable, DC**

Coil Power Rating DC: **450 mW**

Coil Resistance: **1280  $\Omega$**

Coil Special Features: **UL Coil Insulation Class F**

[All STD OEG PCB OSA Power Relays \(7\)](#)

Features

Product Type Features

Power Relay Type	Standard
------------------	----------

Electrical Characteristics

Insulation Initial Dielectric Between Coil & Contact Class	3500 – 4000 V
Insulation Initial Dielectric Between Open Contacts	750 Vrms
Contact Limiting Making Current	5 A
Contact Limiting Short-Time Current	5 A
Contact Limiting Continuous Current	5 A
Insulation Creepage Class	5.5 – 8 mm
Coil Power Rating Class	400 – 500 mW
Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms
Insulation Creepage Between Contact & Coil	6.4 mm[.251 in]
Contact Limiting Breaking Current	5 A
Coil Magnetic System	Monostable, DC



Coil Power Rating DC	450 mW
Coil Resistance	1280 Ω
Coil Special Features	UL Coil Insulation Class F
Coil Voltage Rating	24 VDC
Contact Switching Load (Min)	100mA @ 5V
Contact Switching Voltage (Max)	250 VAC
Contact Voltage Rating	250 VAC

Body Features

Product Weight	6 g[.211 oz]
----------------	--------------

Contact Features

Contact Arrangement	1 Form A (NO)
Contact Current Class	2 – 5 A, 16 A
Contact Current Rating (Max)	5 A
Contact Material	AgSnO
Contact Number of Poles	1
Relay Terminal Type	PCB-THT

Mechanical Attachment

Relay Mounting Type	Printed Circuit Board
---------------------	-----------------------

Dimensions

Length Class (Mechanical)	16 – 20 mm
Insulation Clearance Class	2.5 – 4 mm
Height Class (Mechanical)	14 – 15 mm
Insulation Clearance Between Contact & Coil	6.4 mm[.251 in]
Width Class (Mechanical)	10 – 12 mm
Product Width	10.2 mm[.4 in]
Product Length	18.2 mm[.717 in]
Product Height	15.2 mm[.598 in]

Usage Conditions

Environmental Ambient Temperature Class	70 – 85 °C
Environmental Ambient Temperature (Max)	85 °C[185 °F]

Packaging Features

Packaging Method	Box & Tray, Tray
------------------	------------------



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




Also in the Series | OEG Miniature PCB Relay OJT



Power Relays(7)

Customers Also Bought

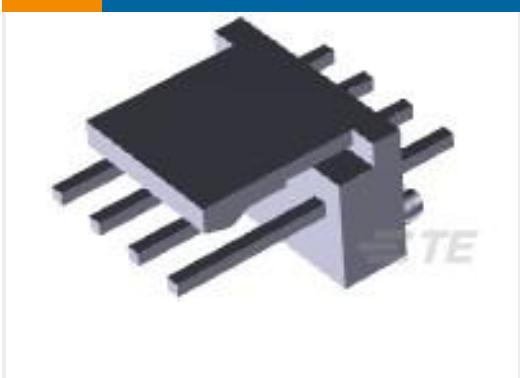

TE Part #3-647609-4  
04P MTA100 HDR ASSY F/L LF



TE Part #1415898-4  
PCB Power Relay: 16 Amp, Inrush



TE Part #1937650-5  
PCB Power Relay: Bystable, Polarized




TE Part #7-1393239-5  
RT31L024



TE Part #5555153-1  
MJ,LPF,R/A,8P,PCBG,PSTP.15TTR



TE Part #1-1415898-5  
RTS3TA05



TE Part #1721923-6  
OJE-SS-112HMF,000T0

Documents

Product Drawings

OJT-SH-124DM,000

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1-1461116-5\_D6.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-1461116-5\_D6.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-1461116-5\_D6.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.



Datasheets & Catalog Pages

OJT Series Relay Datasheet

English

Product Specifications

Definitions General Purpose Relays

English