

AMP | Heavy Duty Sealed Connector Series

TE Internal #: 1-1564532-1 Housing for Male Terminals, Wire-to-Wire, 15 Position, .236 in / .157 in [6 mm / 4 mm] Centerline, Sealable, Black, Heavy Duty Sealed Connector Series

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > Heavy Duty Sealed Connector Series Housings



Connector System: Wire-to-Wire Number of Positions: 15 Connector & Housing Type: Housing for Male Terminals Centerline (Pitch): 4 mm, 6 mm [.157 in, .236 in] Sealable: Yes

All Heavy Duty Sealed Connector Series Housings (204)

Features

Product Type Features

Mixed & Hybrid Connector

Contact Features			
Connector & Keying Code	A		
Primary Product Color	Black		
Body Features			
Nominal Voltage Architecture	12 V, 24 V, 42 V, 60 V		
Operating Voltage	60 VDC		
Electrical Characteristics			
Number of Rows	2		
Number of Positions	15		
Configuration Features			
Primary Locking Feature	On the Terminal		
Sealable	Yes		
Connector & Housing Type	Housing for Male Terminals		
Connector System	Wire-to-Wire		
Connector Shape	Rectangular		

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 15 Position, .236 in / .157 in [6 mm / 4 mm] Centerline, Sealable, Black, Heavy Duty Sealed Connector Series



Contact Size	1.6mm, 2.8mm
Contact Type	Tab
Mating Tab Width	1.6 mm, 2.8 mm[.063 in][.11 in]
Contact Current Rating (Max)	40 A
Nechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Panel Mount
Housing Features	
Housing Material	PBT GF
Centerline (Pitch)	4 mm, 6 mm[.157 in][.236 in]
Dimensions	
Connector Height	48.1 mm[1.894 in]
Product Width	39.8 mm[1.567 in]
Product Length	62.5 mm[2.461 in]
Row-to-Row Spacing	6.2 mm, 6.8 mm[.244 in][.268 in]
Jsage Conditions	
Operating Temperature (Max)	70 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C, 140 °C[158 ° F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F][284 °F]
Operating Temperature Range	-40 - 140 °C[-40 - 284 °F]
Operation/Application	
Circuit Application	Signal
ndustry Standards	
Degree of Protection	IP67
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	80

Housing for Male Terminals, Wire-to-Wire, 15 Position, .236 in / .157 in [6 mm / 4 mm] Centerline, Sealable, Black, Heavy Duty Sealed Connector Series



Other

Serviceable	Yes
Connector Position Assurance Capable	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Housing for Male Terminals, Wire-to-Wire, 15 Position, .236 in / .157 in [6 mm / 4 mm] Centerline, Sealable, Black, Heavy Duty Sealed Connector Series







Also in the Series | Heavy Duty Sealed Connector Series

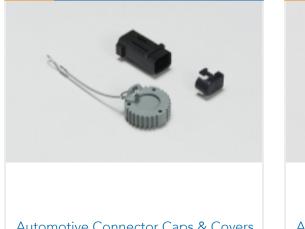








Data Connectivity Headers(2)

Automotive	Connector	Caps a	COVCIS	
(25)				

Automotive Housings(207)

Connector Seals & Cavity Plugs(5)

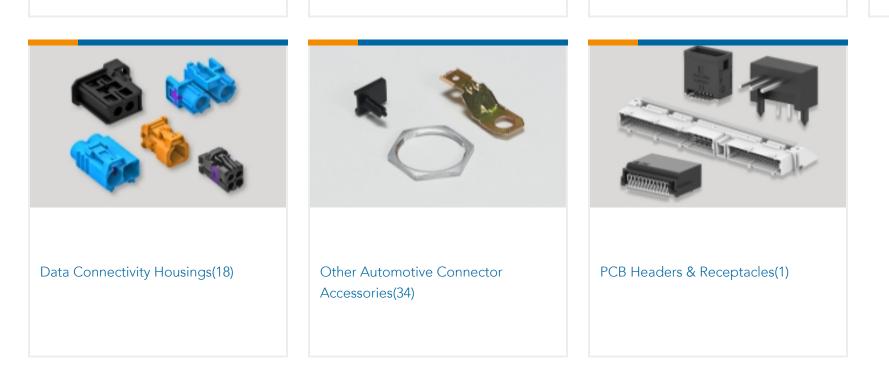

Customers Also Bought



Housing for Male Terminals, Wire-to-Wire, 15 Position, .236 in / .157 in [6 mm / 4 mm] Centerline, Sealable, Black, Heavy Duty Sealed Connector Series







Documents

Product Drawings 15POS, MIXED, TAB HSG, ASSY

English

CAD Files Customer View Model ENG_CVM_CVM_1-1564532-1_J.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1564532-1_J.3d_igs.zip

English

Customer View Model

```
ENG_CVM_CVM_1-1564532-1_J.3d_stp.zip
```

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages HDSCS Catalog

English

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

S For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 15 Position, .236 in / .157 in [6 mm / 4 mm] Centerline, Sealable, Black, Heavy Duty Sealed Connector Series



Application Specification

English

Product Environmental Compliance Product Compliance English

Product Compliance

English